185 Rollins Acres Ln
3-Bedroom - Septic Proposal
DAB Holdings of NC, LLC
Harnett County PIN: 0681-41-2800
Lot #5

*Not a Survey
Sketched from a plot plan supplied by owner

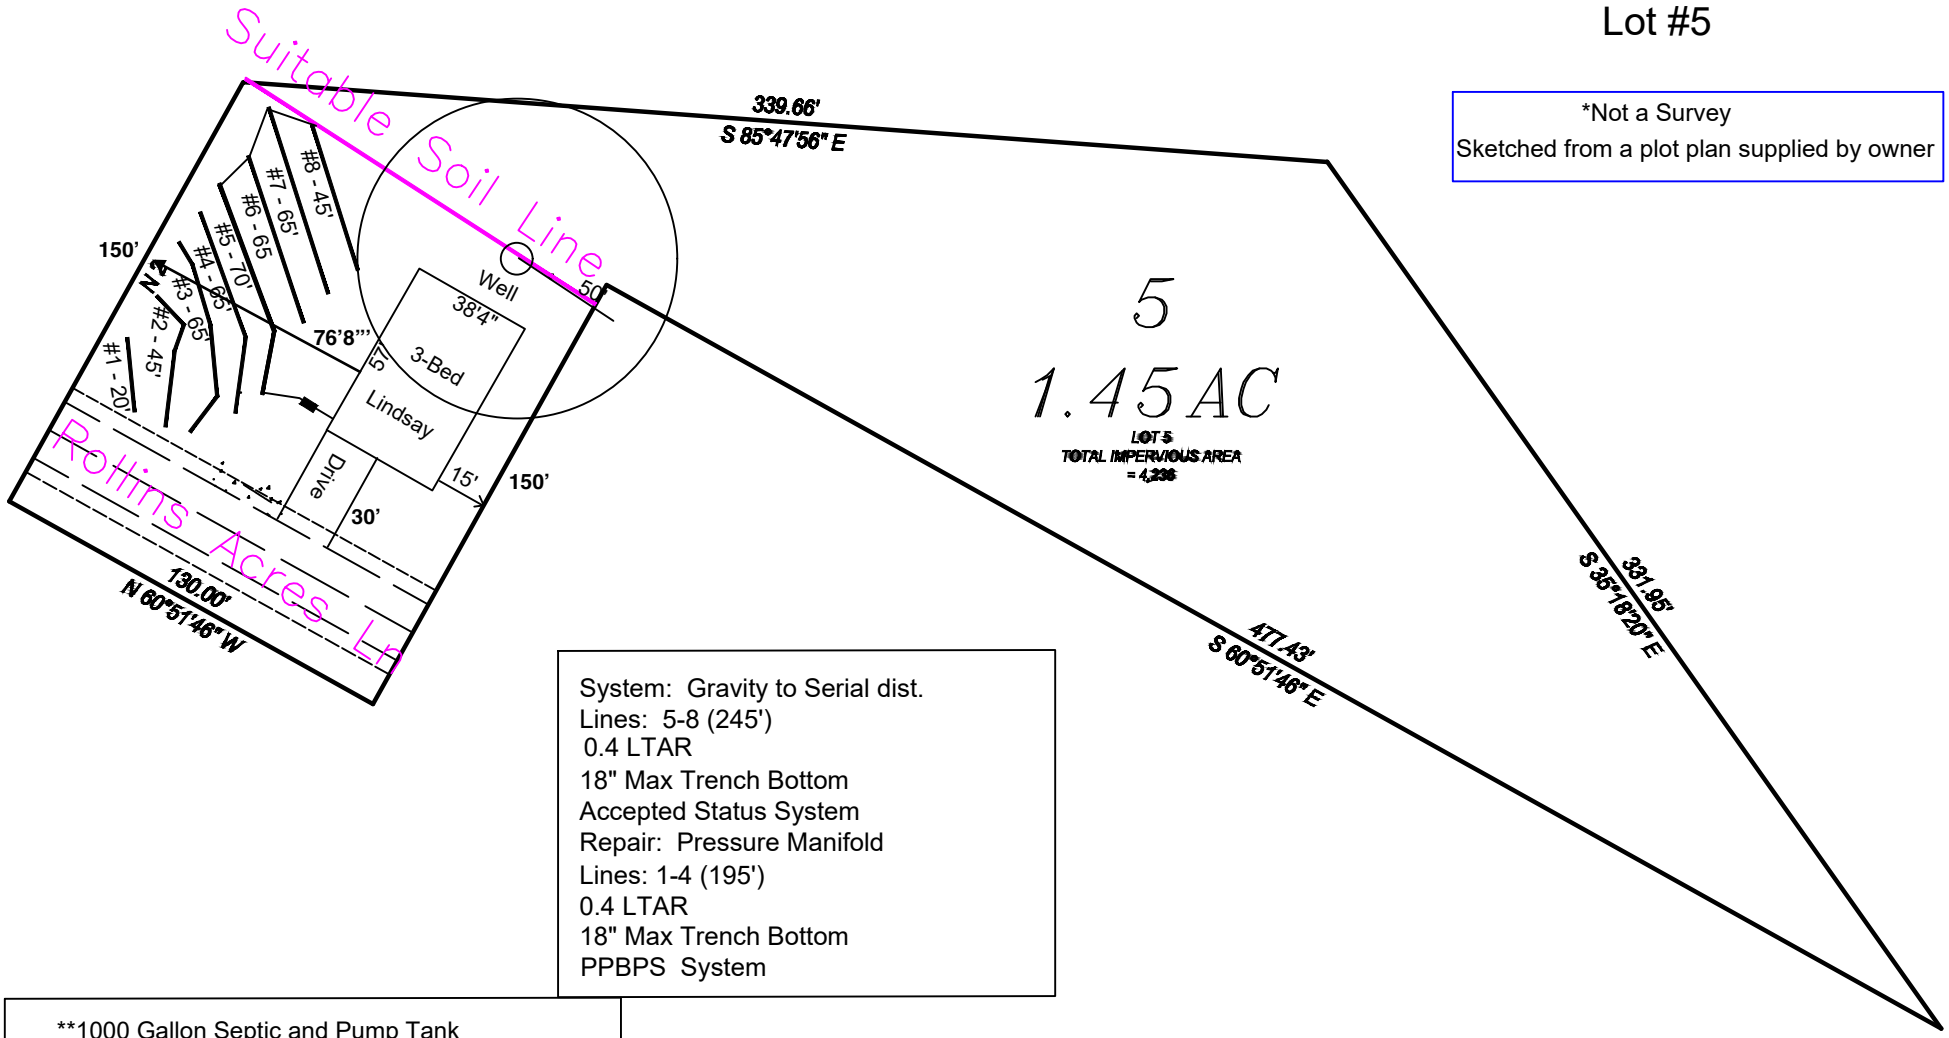

System: Gravity to Serial dist.
Lines: 5-8 (245')
0.4 LTAR
18" Max Trench Bottom
Accepted Status System
Repair: Pressure Manifold
Lines: 1-4 (195')
0.4 LTAR
18" Max Trench Bottom
PPBPS System

**1000 Gallon Septic and Pump Tank
Tank and trenches to be located minimum of 10' from any property line and minimum of 5' from any building foundation.
*Do Not Cut, Fill, or Alter Drainfield or Repair Area
*Comply with all setbacks
*Contact local health dept. and/or Alex Adams prior to or during installation with any questions or concerns.

GRAPHIC SCALE
1" = 60'

Adams
Soil Consulting
919-414-6761
Job #1862
7-31-24