


Client: S&S Homes Project: Charleston Address: Charleston Date: 10/24/2024 Input by: LENNY NORRIS Job Name: Charleston

Project #:

Kerto-S LVL 2-Ply - PASSED 1.750" X 9.250" BM1

Level: Level

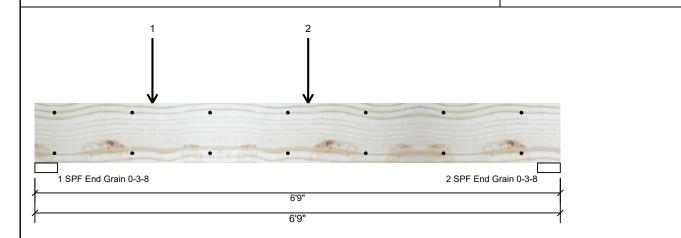

Member Information Reactions UNPATTERNED Ib (Uplift)

Type: Application: Plies: Moisture Condition: Dry Deflection LL: 480 Deflection TL: 360 Deck: Importance: Normal - II Temperature: Temp <= 100°F

Floor Design Method: **Building Code: IBC/IRC 2015** Load Sharing: No Not Checked

				,		
Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	0	1090	1066	0	0
2	Vertical	0	775	751	0	0

Page 1 of 2

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	4556 ft-lb	3'6 1/8"	14423 ft-lb	0.316 (32%)	D+S	L
Unbraced	4556 ft-lb	3'6 1/8"	10290 ft-lb	0.443 (44%)	D+S	L
Shear	2155 lb	1' 3/4"	7943 lb	0.271 (27%)	D+S	L
LL Defl inch	0.038 (L/1984)	3'6 1/8"	0.157 (L/480)	0.242 (24%)	S	L
TL Defl inch	0.077 (L/983)	3'6 1/8"	0.210 (L/360)	0.366 (37%)	D+S	L

Bearings

Bearing	Length	Dir.	Cap. I	React D/L lb	Total	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	Vert	21%	1090 / 1066	2157	L	D+S
2 - SPF End Grain	3.500"	Vert	15%	775 / 751	1526	L	D+S

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at end bearings.
- 7 Bottom must be laterally braced at end bearings.
- 8 Lateral slenderness ratio based on single ply width.

0 2010101010		ingle ply main								
ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Point	1-6-2		Тор	619 lb	0 lb	619 lb	0 lb	0 lb	A8
	Bearing Length	0-3-8								
2	Point	3-6-2		Тор	1198 lb	0 lb	1198 lb	0 lb	0 lb	A9
	Bearing Length	0-3-8								
	Self Weight				7 PLF					

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown, It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals Damaged Beams must not be used
- Design assumes top edge is laterally restrained
 Provide lateral support at bearing points to avoid
 lateral displacement and rotation
- For flat roofs provide proper drainage to prevent ponding

This design is valid until 5/29/2026

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS





Client: S&S Homes Project: Charleston Address: Charleston Date: 10/24/2024 Input by: LENNY NORRIS Job Name: Charleston


Project #:


Kerto-S LVL BM1

1.750" X 9.250"

2-Ply - PASSED

Level: Level

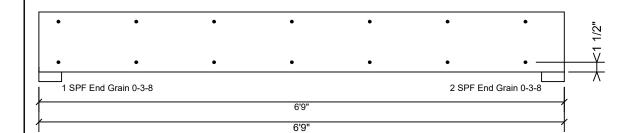



Page 2 of 2

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

Capacity	0.0 %
Load	0.0 PLF
Yield Limit per Foot	163.7 PLF
Yield Limit per Fastener	81.9 lb.
См	1
Yield Mode	IV
Edge Distance	1 1/2"
Min. End Distance	3"
Load Combination	
Duration Factor	1.00

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- Handling & Installation

 1. IVI beams must not be cut or drilled

 2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 3. Damaged Beams must not be used

 4. Design assumes top edge is laterally restrained

 5. Provide lateral support at bearing points to avoid lateral displacement and rotation
- For flat roofs provide proper drainage to prevent ponding

This design is valid until 5/29/2026

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS

