A	
App#	
, the hi	

Harnett County Department of Public Health


Improvement Permit

	ued with only an Improvement Permit
	Y LOCATION: Harry 24/27
ISSUED TO: SUBDIVIS REPAIR SEXPANSION SUBDIVIS	Site Improvements required prior to Construction Authorization Issuance:
Type of Structure: 7500 Red	site improvements required prior to construction authorization issuance.
Proposed Wastewater System Type: Exp Dunot	
Projected Daily Flow: 366 GPD	
Number of bedrooms: Number of Occupants: max	
Basement (Yes No No	
Pump Required: Yes No May be required based on final location and	
Type of Water Supply: Community 2 Public Well Distance from w Permit conditions:	ell feet Permit valid for: Tive years No expiration
1	——————————————————————————————————————
* al I HE	7 1080
	ate: 5-21-20 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The	e permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This
the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.	not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of
Construction	Authorization
	Building Permit) 1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance
with the attached system layout.	1777 the medipolitics of references and that permit and shall be met. Material shall be instanted in actorulance
ISSUED TO: Breila Hitt PRO	711/37
	PERTY LOCATION: Hwy 24/27 DIVISION THE HISLEANS LOT # 19
	xpansion
Basement? Yes No Basement Fixtures? Yes No Type of Wastewater System**	(Initial) Wastewater Flow: 360 GPD
(See note below, if applicable)	(Initial) Wastewater Flow: _366 GPD
25% USTUCIO	(Repair)
Installation Requirements/Conditions Number of trenches	(Repair)
Septic Tank Size So gallons Exact length of each trenc	h 150 feet Trench Spacing: Feet on Center
Pump Tank Sizegallons Trenches shall be installed	0
Maximum Trench Depth of:	and the second s
(Trench bottoms shall be I	
in all directions)	
Pump Requirements:ft. TDH vsGPM	inches below pipe
	. Aggregate Depth: Z inches above pipe
Conditions: ONIGINAL UP ANDA S	TIII Gorsts 12 inches total
NATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART	OF SEPTIC SYSTEM OR REPAIR AREA
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.	of service statem on Refain Allen.
**If applicable: 1 understand the system type specified is different from the type s	pecified on the application. I accept the specifications of this permit.
Owner/Legal Representative Signature:	Date:
his Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatm	
Authorization is subject to compliance with the provisions of the taws and rules for sewage freath	nent and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH
Authorized State Agent	Pibers
Authorized State Agent MAnhand	Date: 5-21-20 uthorization Expiration Date: 5-71-25
Construction Al	uthorization Expiration Date: 574-25

Application # _____

Harnett County Department of Public Health Site Sketch

Property Location: Hun 24177			
Property Location: Hay 24/27 Issued To: Baearla Hit	Subdivision THE Highland	1	Lot # _/S
100	11 / TO PALK	5500,00000	
Authorized State Agent:	Manhant	Date:	8-21-20
		_	

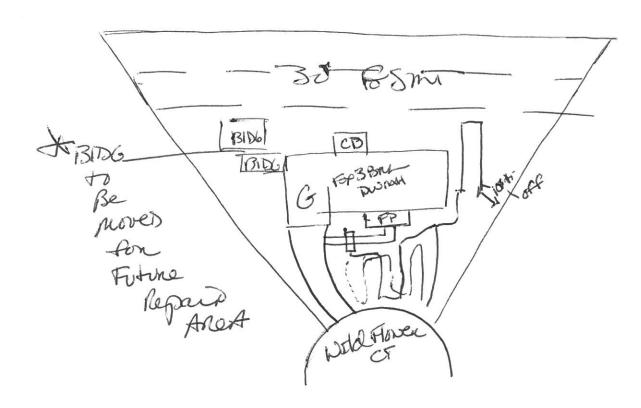

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.