


TIMMONS GROUP

YOUR VISION ACHIEVED THROUGH OURS.

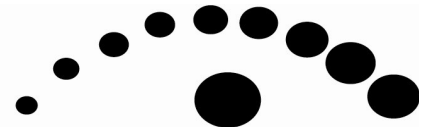


FIELD REPORT

| | |
|---|-------------------------------------|
| Project Name: 450 River Bluff Dr | Location: Harnett County, NC |
| Project No.: Pending | Permit No.: |
| Client: Outpost Design Build | Weather: 70°F Sunny |
| Contractor: Outpost Design Build | Date: 4/23/25 |
| Technician: George Nicksich | Portal to Portal Time: 2.5 |

Summary: Foundation inspection and rebar


Notes: Timmons arrived on site as requested by contractor. Tech arrived to find site had been excavated for foundations and rebar in place. Tech observed all foundations were dug to firm bearing soils, and rebar was tied and in place as per plans provided on site. Tech did observe soils beneath probed firm with two hands on 1/2" steel probe rod. Tech marked two areas of organic roots that were suggested to be removed. Previous inspection found the area noted on 4-10-2025 which was located in workshop/garage section and suggested to contractor to excavate loose soils and replace with washed stone had been completed.

Tech observed Monolith slabs, with vapor barrier and insulation boards in place.

Report By:  (Signature) George Nicksich (Print)


Reviewed By: George Nicksich **Date:** 4/23/25

Page 1 of 2

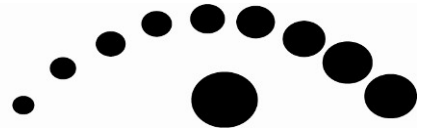


FIELD REPORT PHOTOS

| | |
|---|-------------------------------------|
| Project Name: 450 River Bluff Dr | Location: Harnett County, NC |
| Project No.: Pending | Permit No.: |
| Client: Outpost Design Build | Weather: 70°F Sunny |
| Contractor: Outpost Design Build | Date: 4/23/25 |
| Technician: George Nicksich | Portal to Portal Time: 2.5 |

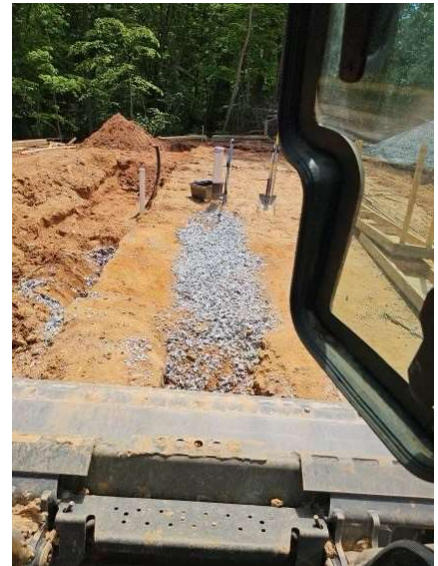

Repair for soft soils in drain line
repaired with washed stone

Report By:  (Signature) George Nicksich (Print)

Reviewed By: George Nicksich Date: 4/23/25

Page 2 of 2