

3-26-84

OWNER: KILARNOLD CONSTRUCTION PHONE: \_\_\_\_\_ DATE RECEIVED: \_\_\_\_\_ DATE EVALUATED: \_\_\_\_\_  
 ADDRESS: \_\_\_\_\_ PROPERTY IDENTIFICATION NO.: \_\_\_\_\_  
 COUNTY: \_\_\_\_\_ PROPERTY SIZE: \_\_\_\_\_ PROPOSED FACILITY: DW  
 LOCATION OF SITE: Lot # A-44 Heritage Village S/D  
 WATER SUPPLY: On-Site Well \_\_\_\_\_ Community \_\_\_\_\_ Public  EVALUATION BY: Auger Boring  PR \_\_\_\_\_

LANDSCAPE POSITION	Group	TEXTURE	App. Rate #
R - Ridge	I	s - sand	1.2-0.8
S - Shoulder slope		lg - loamy sand	
L - Linear slope	II	sl - sandy loam	0.8-0.6
FS - Foot slope		l - loam	
N - Nose slope	III	sl - silt	0.6-0.3
H - Head slope		sl - silt loam	
Cc - Concave slope		scl - silty clay loam	
Cv - Convex slope		cl - clay loam	
T - Terrace	IV	sc - sandy clay	0.4-0.1
FP - Flood Plain		slc - silty clay	
		c - clay	

**LEGEND**

CONSISTENCE	WET	STRUCTURE
MOIST		
vt - very friable	Ns - non-sticky	sg - single grain
fr - friable	Ss - slightly sticky	m - massive
f - firm	S - sticky	cr - crumb
vf - very firm	Vs - very sticky	gr - granular
ef - extremely firm		sbk - subangular blocky
	Np - non-plastic	abk - angular blocky
	Sp - slightly plastic	pl - platy
	P - plastic	pr - prismatic
	Vp - very plastic	

Use the above standard abbreviations.


**NOTES:**

Horizon Depth - in inches  
 Depth of Fill - in inches from land surface  
 Restrictive Horizon - thickness and inches from land surface  
 Sprolrite - S (suitable) or U (unsuitable)

HS 2501 (Revised \_\_\_\_\_)  
 Sanitation Branch (Review \_\_\_\_\_)

**NOTES:**

Soil Wetness - inches from land surface to free water or inches from land surface to soil color chroma 2 or less - record Munsell color chrt designation  
 Classification - S (suitable), PS (provisionally suitable) or U (unsuitable)  
 Long-Term Acceptance Rate - gal/day/ft<sup>2</sup>

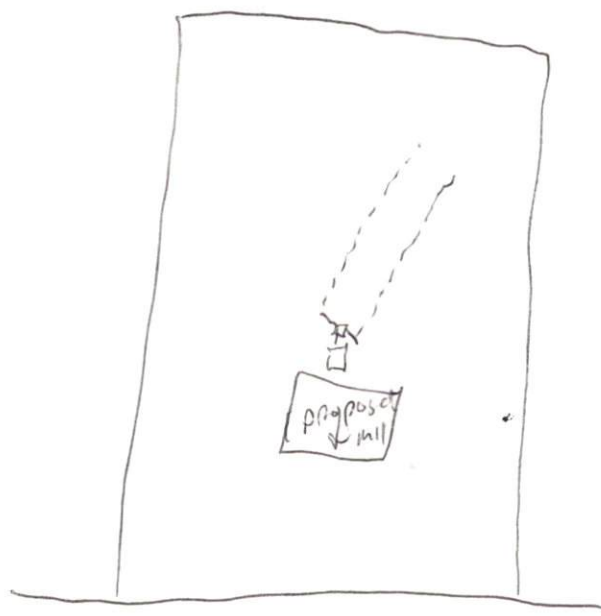

*Run with contours*

FACTORS	PROFILE 1	PROFILE 2	PROFILE 3	PROFILE 4	PROFILE 5
CAPE POSITION					
DEPTH (ft)					
DEPTH I	4-17	41-17	4-18		
Group	C. SAND	C. SAND	C. SAND		
Distance					
Time					
Velocity					
DEPTH II	17-42	17-40	18-40		
Group	SANDY CLAY	SANDY CLAY	SANDY CLAY		
Distance					
Time					
Velocity					
DEPTH III	42-48	40-48	40-48		
Group	C. SAND	C. SAND	C. SAND		
Distance					
Time					
Velocity					
DEPTH IV					
Group					
Distance					
Time					
Velocity					
WETNESS					
ACTIVE HORIZON					
LITE					
CLASSIFICATION					
PERM					
ACCEPTANCE RATE	.8	.8	.8		

FACTORS	PROFILE 1	PROFILE 2	PROFILE 3	PROFILE 4	PROFILE 5
CAPE POSITION					
DEPTH (ft)					
DEPTH I					
Group					
Distance					
Time					
Velocity					
DEPTH II					
Group					
Distance					
Time					
Velocity					
DEPTH III					
Group					
Distance					
Time					
Velocity					
DEPTH IV					
Group					
Distance					
Time					
Velocity					
WETNESS					
ACTIVE HORIZON					
LITE					
CLASSIFICATION					
PERM					
ACCEPTANCE RATE					

CLASSIFICATION: \_\_\_\_\_  
 PERMITTED BY: \_\_\_\_\_  
 DATE: \_\_\_\_\_

SITE LONG-TERM ACCEPTANCE RATE: \_\_\_\_\_  
 OTHER(S) PRESENT: \_\_\_\_\_