

OWNER: Wagner Industries PHONE: _____ DATE REQUESTED: 3/27/84 DATE EVALUATED: _____
 ADDRESS: _____ PROPERTY IDENTIFICATION NO.: _____ PROPOSED FACILITY: _____
 COUNTY: _____ LOCATION OF SITE: Brook's Green Lot V-2 _____
 WATER SUPPLY: On-Site Well _____ Community _____ Public _____ EVALUATION BY: Auger Boring _____ PR _____ CA

LEGEND

- STRUCTURE**
- sg - single grain
 - m - massive
 - cr - crumb
 - gr - granular
 - abk - subangular blocky
 - abk - angular blocky
 - pl - platy
 - pr - prismatic
- WET**
- Na - non-sticky
 - Ba - aligny sticky
 - Sa - sticky
 - Vs - very sticky
 - Np - non-plastic
 - Sp - aligny plastic
 - P - plastic
 - Vp - very plastic

MOIST

- vt - very friable
- lv - very firm
- fl - extremely firm

CONSISTENCE

as the above standard abbreviations.

WDSCAPE POSITION	TEXTURE	MOIST	Group
R - Ridge	s - sand	1.2-0.8	I
S - Shoulder slope	ls - loamy sand	0.8-0.6	II
L - Least slope	sl - sandy loam		
S - Foot slope	sl - silt loam		
H - Head slope	sl - silt loam		
C - Concave slope	sl - silt loam	0.6-0.3	III
V - Convex slope	cl - clay loam		
T - Terrace	sc - sandy clay loam		
I - Flood Plain	sc - sandy clay		
	slc - silty clay	0.4-0.1	IV
	c - clay		

NOTES:

- In inches
- In inches from land surface
- In inches from land surface
- Thickness and inches from land surface
- B (sunable) or U (unsunable)
- MS 2601 (Revised)
- adprie
- Western Branch (Revised)

NOTES:

- inches from land surface to free water or inches from land surface to soil color
- chroma 2 or less - (econd Munsell color chro designation
- Classification - S (sunable), PS (provisionally sunable) or U (unsunable)
- Long term Acceptance Rate - gal/day/ft

FACTORS	PROFILE 1	PROFILE 2	PROFILE 3	PROFILE 4	PROFILE 5
SCAPE POSITION	2				
E (%)	0-4%				
ZON I DEPTH	0-48"				
re Group	# 56				
sistence	VRL				
cture	gr				
ralogy	1:1				
ZON II DEPTH					
re Group					
sistence					
cture					
ralogy					
ZON III DEPTH					
re Group					
sistence					
cture					
ralogy					
ZON IV DEPTH					
re Group					
sistence					
cture					
ralogy					
WETNESS	no matter if = chert or 2 < 48"				
RICTIVE HORIZON					
OLITE					
IFICATION	5				
TERM					
TANCE RATE	.5				

FACTORS	PROFILE 1	PROFILE 2	PROFILE 3	PROFILE 4	PROFILE 5
SCAPE POSITION					
E (%)					
ZON I DEPTH					
re Group					
sistence					
cture					
ralogy					
ZON II DEPTH					
re Group					
sistence					
cture					
ralogy					
ZON III DEPTH					
re Group					
sistence					
cture					
ralogy					
ZON IV DEPTH					
re Group					
sistence					
cture					
ralogy					
WETNESS					
RICTIVE HORIZON					
OLITE					
IFICATION					
TERM					
TANCE RATE					

CLASSIFICATION: 5 SITE LONG-TERM ACCEPTANCE RATE: .5
 DATED BY: Robert G. Fisher, RS OTHER(S) PRESENT:

SANITARY SEWAGE SYSTEM

OWNER: Custom Contracting, Inc. PHONE: _____ DATE REQUESTED: _____ DATE EVALUATED: _____
 ADDRESS: Lot V-2 Sec 5 Carolyn Seasons PROPERTY IDENTIFICATION NO.: _____
 COUNTY: _____ PROPERTY SIZE: _____ PROPOSED FACILITY: _____
 LOCATION OF SITE: _____
 WATER SUPPLY: On-Site Well _____ Community _____ Public _____ EVALUATION BY: Auger Boring _____ PR _____

LANDSCAPE POSITION	Group	TEXTURE	App. Rate
R - Ridge	I	s - sand	1.2-0.8
S - Shoulder slope		sq - loamy sand	
L - Linear slope	II	sl - sandy loam	0.8-0.6
FS - Foot slope		l - loam	
N - Nose slope	III	sl - silt	0.6-0.3
H - Head slope		sil - silt loam	
2c - Concave slope	IV	scl - silty clay loam	0.4-0.1
2v - Convex slope		cl - clay loam	
T - Terrace		scl - sandy clay loam	
FP - Flood Plain		sc - sandy clay	
		slc - silty clay	
		c - clay	


LEGEND

MOIST vtr - very friable fr - friable fl - firm vfl - very firm efl - extremely firm	CONSISTENCE WET Na - non-sticky Sa - slightly sticky S - sticky Vs - very sticky Np - non-plastic Sp - slightly plastic P - plastic Vp - very plastic	STRUCTURE sq - single grain m - massive cr - crumb gr - granular sbk - subangular blocky abk - angular blocky pl - platy pr - prismatic
--	---	--

Use the above standard abbreviations.

- NOTES:**
- Soil Weiness - inches from land surface to free water or inches from land surface to soil color chroma 2 or less - record Munsell color chip designation
 - Classification - S (suitable), PS (provisionally suitable) or U (unsuitable)
 - Long-Term Acceptance Rate - gal/day/ft²

4S 2501 (Revised _____)
 Inspection Branch (Review _____)

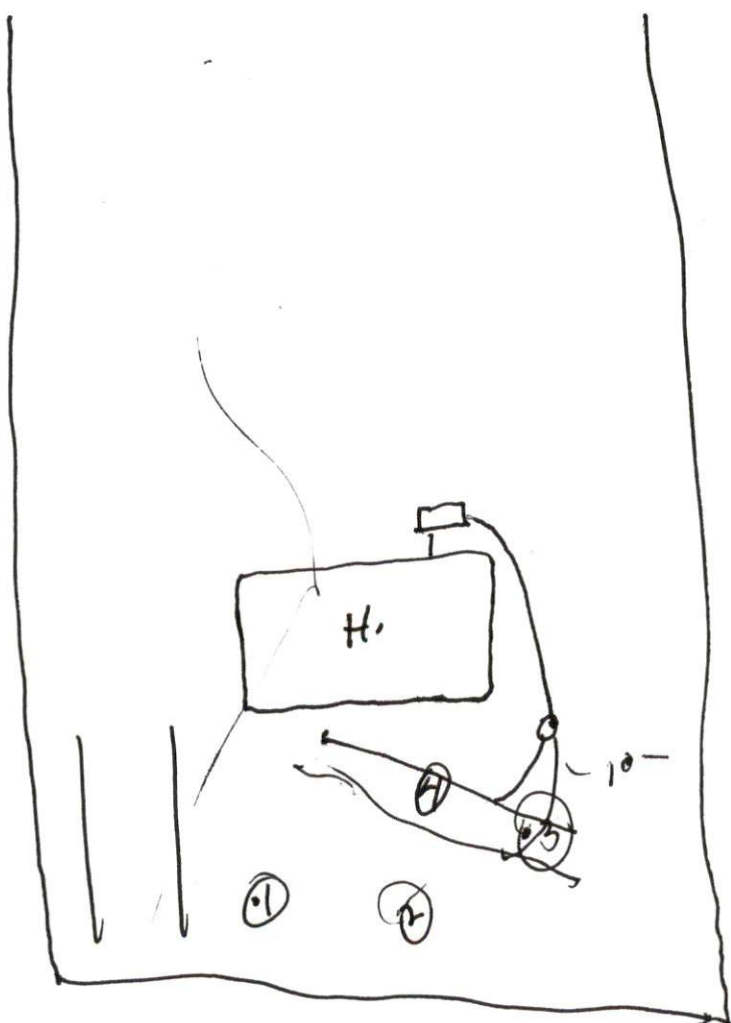

19x24
 2x75
 step down as
 needed

ED BY:

SITE LONG-TERM ACCEPTANCE RATE:
OTHER(S) PRESENT:

FACTORS	PROFILE 1	PROFILE 2	PROFILE 3	PROFILE 4	PROFILE 5
SCAPE POSITION					
ZONE I DEPTH					
Zone Group					
Distance					
Zone II DEPTH					
Zone Group					
Distance					
Zone III DEPTH					
Zone Group					
Distance					
Zone IV DEPTH					
Zone Group					
Distance					
ACTIVE HORIZON					
LIFE					
IFICATION					
FORM					
RANGE RATE					

FACTORS	PROFILE 1	PROFILE 2	PROFILE 3	PROFILE 4	PROFILE 5
SCAPE POSITION					
ZONE I DEPTH	0-49	0-49	0-48	0-48	0-48
Zone Group	ST	ST	ST	ST	ST
Distance	ST	ST	ST	ST	ST
Zone II DEPTH					
Zone Group					
Distance					
Zone III DEPTH					
Zone Group					
Distance					
Zone IV DEPTH					
Zone Group					
Distance					
ACTIVE HORIZON	(46)	(36)		(42)	
LIFE					
IFICATION					
FORM					
RANGE RATE					