

FACTORS	PROFILE 1	PROFILE 2	PROFILE 3	PROFILE 4	PROFILE 5
SCAPE POSITION	UPLAND				
E (%)	5-6%				
ZON I DEPTH					
re Group					
istance					
ture					
ralogy					
ZON II DEPTH					
re Group					
istance					
ture					
ralogy					
ZON III DEPTH	24' - 40'				
re Group	Group IV				
istance	Fri - Firm				
ture	SBK				
ralogy	Non Exp				
ZON IV DEPTH					
re Group					
istance					
ture					
ralogy					
WETNESS					
RICTIVE HORIZON					
OLITE					
IFICATION	PS	PS	PS	PS	
TERM					
TANCE RATE	0.45 gal/A ²	"	"	"	

FACTORS	PROFILE 1	PROFILE 2	PROFILE 3	PROFILE 4	PROFILE 5
SCAPE POSITION					
E (%)					
ZON I DEPTH					
re Group					
istance					
ture					
ralogy					
ZON II DEPTH					
re Group					
istance					
ture					
ralogy					
ZON III DEPTH					
re Group					
istance					
ture					
ralogy					
ZON IV DEPTH					
re Group					
istance					
ture					
ralogy					
WETNESS					
RICTIVE HORIZON					
LITE					
IFICATION					
ERM					
TANCE RATE					

CLASSIFICATION: PS For down system
 DATED BY: [Signature]

SITE LONG-TERM ACCEPTANCE RATE: 0.45 gal/A²
 OTHER(S) PRESENT:

SANITARY SEWAGE SYSTEM

4-23-94


OWNER: Richard Stevens PHONE: _____ DATE REQUESTED: _____ DATE EVALUATED: _____
 ADDRESS: Rolling Mills Rd. PROPERTY IDENTIFICATION NO.: _____
 COUNTY: HARNETT PROPERTY SIZE: 3.43 AC PROPOSED FACILITY: SFD
 LOCATION OF SITE: Rolling Mills Rd.
 WATER SUPPLY: On-Site Well Community _____ Public _____ EVALUATION BY: Auger Boring Pit _____ Cur _____

LANDSCAPE POSITION	Group	TEXTURE	Appl. Rate	LEGEND		
				MOIST	WET	STRUCTURE
R - Ridge	I	s - sand	1.2-0.8	vtr - very friable	Ns - non-sticky	sg - single grain
S - Shoulder slope		ls - loamy sand		fr - friable		m - massive
L - Linear slope	II	sl - sandy loam	0.8-0.6	f - firm	Ss - slightly sticky	cr - crumb
FS - Foot slope		l - loam		vfl - very firm		gr - granular
N - Nose slope	III	sl - silt	0.6-0.3	efl - extremely firm	S - sticky	sbk - subangular blocky
H - Head slope		sil - silt loam		Wp - very plastic		abk - angular blocky
Cc - Concave slope		scl - silty clay loam				pl - platy
Cv - Convex slope		cl - clay loam				
T - Terrace	scl - sandy clay loam					
FP - Flood Plain	IV	sc - sandy clay	0.4-0.1			

Use the above standard abbreviations.

- NOTES:**
- Soil Depth - in inches
 - Depth of Fill - in inches from land surface
 - Restrictive Horizon - thickness and inches from land surface
 - Moisture - S (suitable) or U (unsuitable)
 - HS 2501 (Revised _____)
 - Inspection Branch (Review _____)

- NOTES:**
- Soil Wetness - inches from land surface to free water or inches from land surface to soil colors with chroma 2 or less - record Munsell color chip designation
 - Classification - S (suitable), PS (provisionally suitable) or U (unsuitable)
 - Long-Term Acceptance Rate - gal/day/ft²

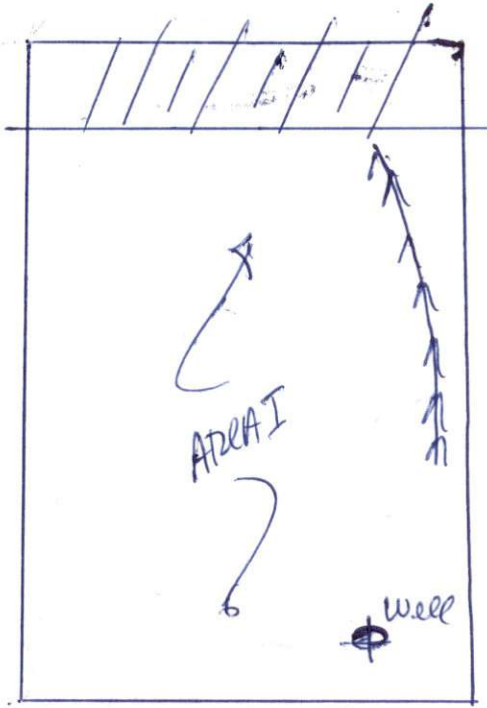

Rolling Mills Rd.