

A Groundworks' Company

Scope of Work for: 662 Christian Light Road Fuquay-Varina, NC 27526

The following will be performed as a crawlspace encapsulation project:

- **CrawlSeal System to include the following:
- -20 ml Vapor Barrier installed wall to wall with 100% floor coverage. All sections of liner will be overlapped a minimum of 1' and will be seamed together, attached with Christmas Tree fasteners, and caulked.
- -Install WallSeal on basement walls to help prevent water vapor and moisture intrusion as well as direct wall leakage to the waterproofing system. (12 ml Vapor Barrier on Walls)
- -Wrap all existing CMU/Brick Piers 20 ml Vapor Barrier. Contractor will leave a termite inspection gap at the top of each pier. The liner will be fastened to the pier and the top edge of the liner will be sealed with caulking.
- -All Vents will be sealed from inside the crawl space with R-10 Rigid 2" Foam Sheathing.
- *Existing R-19 insulation will remain in the floor system.
- *AprilAire E100 Dehumidifier install unit specifications on page 2

*Electrical - Installation of new dedicated 120vac/20amp electrical circuit/s and electrical outlet/s (WP-GFCI) to supply sump pump and /or dehumidifier in crawl space (basement).

Davis Dunlap Electrical LLC.

210 Timberland Dr Angier, NC 27501 (919) 669-0768

davisdunlapelectric@yahoo.com

License #27056-L



A Groundworks' Company

SPECIFICATIONS				
Capacity				
	@ 80°F/60% RH	100 ppd		
	@ 73°F/60% RH	85 ppd		
Energy Factor				
	@ 80°F/60% RH	2.6 L/kW-h		
	@ 73°F/60% RH	2.35 L/kW-h		
Airflow @ varying E.S.P. (external static pressure - dry coil)				
	0.0" w.c.	280 CFM		
	0.2" w.c.	245 CFM		
	0.4" w.c.	210 CFM		
Voltage, phase, frequency		120VAC, 1 phase, 60 Hz		
Current draw ⁽¹⁾		6.9 Amps		
Noise		55 dBA ducted		
Blacastana		Width: 14"		
Dimensions: (cabinet only)(2)		Height: 15"		
(cabinet only)		Length: 26"		
Unit Weight		64 lbs.		
Shipping Weight		82 lbs.		
Inlet air operating conditions during				
-Dehumidification:		50°F-104°F, 40°F		
		dew point min.		
-Ventilation:		40°F-140°F, 0%-99% RH		
Terrenderori.		(non-condensing)		
-0.0				

⁽⁶⁾Rated capacity, energy factor and current draw measured at 80°F/60% RH inlet air at 0.0 ESP.
(2) Height does not include adjustable feet. The width excludes the filter doors and length excludes the duct collars.


FRONT




A Groundworks' Company

Maurie Phifer - Inspector 984.309.9831

Customer	Theresa Stevens
Address	662 Christian Light Rd Fuquay Varina, NC 27529
Customer #	237668
Date:	9/20/24



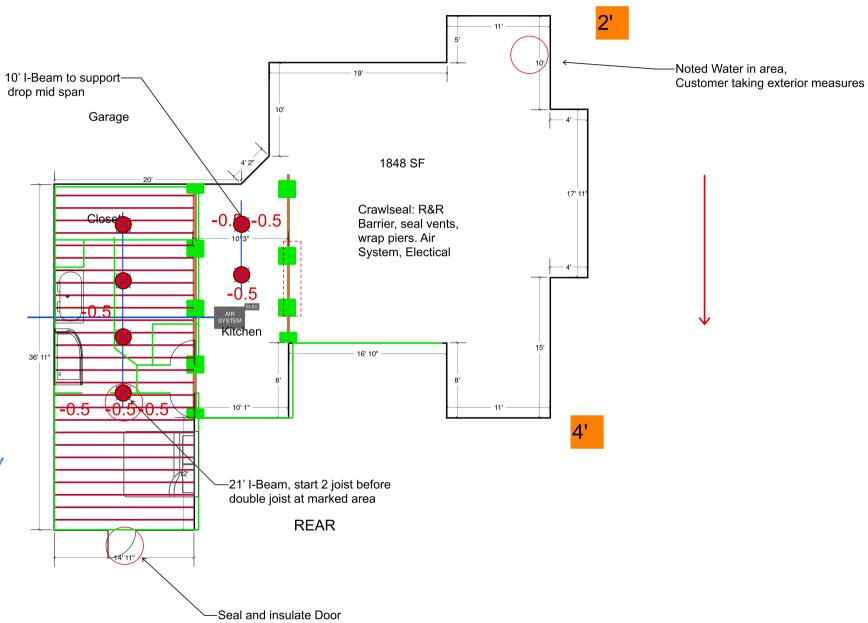



9/26/2024

Tarheel Basement Systems 3333 Air Park Rd., Fuquay Varina, NC, 27526

RE: Foundation Repair for 662 Christian Light Rd., Fuquay-Varina, NC 27526

Existing structure is a wood framed building with a CMU crawlspace foundation. Based on an assessment provided by Tarheel Basement Systems (TBS), the structure is experiencing settlement that is greater than what is expected for the age of the structure. TBS has recommended Intellijacks to stabilize the main support beam. Scapular Engineering has reviewed the data provided by TBS and has verified that the proposed products are adequate per the manufacturer's requirements for the loads applied.

Attachment contents

Page 1	Foundation Plan
	Product Details
	Product Specifications

This report and other work by Scapular Engineering Firm and Engineer of Record ("EOR") were performed pursuant to a contract with TBS and are intended for its use only. This report, and related information if any, to you is not intended to create a relationship between the property owner and Scapular Engineering Firm or EOR, contractual or otherwise, and is not intended to create any duties, guarantees, or warranties (express or implied) to property owner by Scapular Engineering Firm or EOR. This report relies upon, and is dependent upon, the accuracy of information provided by TBS and the analysis in this report is limited to the information provided. This report is limited to the products themselves and only address the structural issue as diagnosed and presented by TBS. Scapular Engineering Firm did not diagnose the structure and is not responsible for a misdiagnose provided by TBS.


Jacob John Bullinger PE: 056953 Scapular Engineering Firm Licensee Number: P-2995 23576 State Route J St. Mary, MO 63673 (573) 275-7647



Foundation Plan


Intellijack Notes:

- 1. Intellijack shall be installed per manufacturer's specifications, reference attached details.
- 2. Spacing of Intellijack shall be as indicated on plan U.N.O.
- 3. Height of Intellijack shall not exceed 10 feet.
- 4. Intellijack and Intellibeam shall be used for supplemental supports only and only used for additional support to the current structure.
- 5. Existing post and/or beam shall not be removed or modified in any way. If Intellijack is used to lift, the existing posts shall be shimmed to ensure the beam bears fully on all existing posts/supports.
- 6. A. Option A: Intellijacks to be placed between existing posts that are unchanged to bear on a 2'x2'x2' thick concrete footing over a 12" think minimum compacted aggregate base, or an 18"x18"x18" minimum compacted aggregate base with the 'IJ-IC' Precast Concrete Footing placed underneath the Intellijack, or the IJ-AB Aluminum Base.
 - B. Option B: Existing posts to be replaced with Intellijacks in the same location as existing posts to bear on existing footings or on a new concrete footing that matches existing concrete footing size and meets a minimum footing size of 2'x2'x2' thick concrete footing over a 12" thick minimum compacted aggregate base, or an 18"x18"x18" minimum compacted aggregate base with the 'IJ-IC' Precast Concrete Footing placed underneath the Intellijack, or the IJ-AB Aluminum Base.
- 7. Concrete shall have a minimum 28 day compressive strength of 3,000 PSI and rebar shall be #4 bars at 6" O.C., EW and grade 60.
- 8. If Intellijacks are supporting existing beams, contractor shall verify that the existing beam is of acceptable condition. If existing beam is damaged or shows signs of deterioration, beam shall be replaced with like-kind materials.

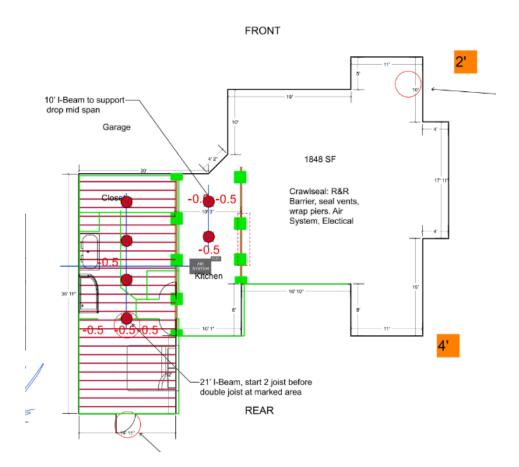

6 Intellijacks will be used.


Product Detail

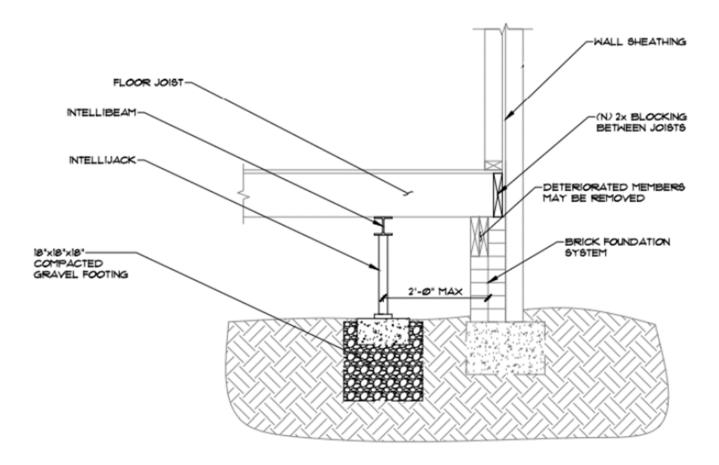









Crawl Space and Basement Detail

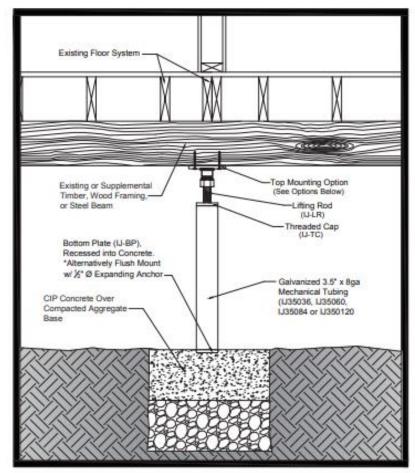

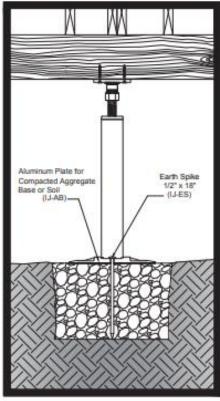

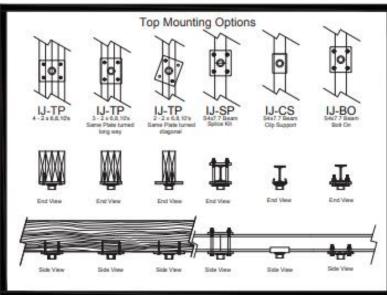

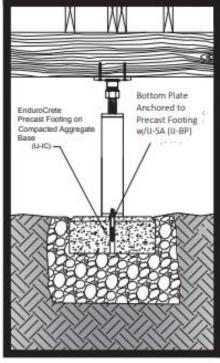

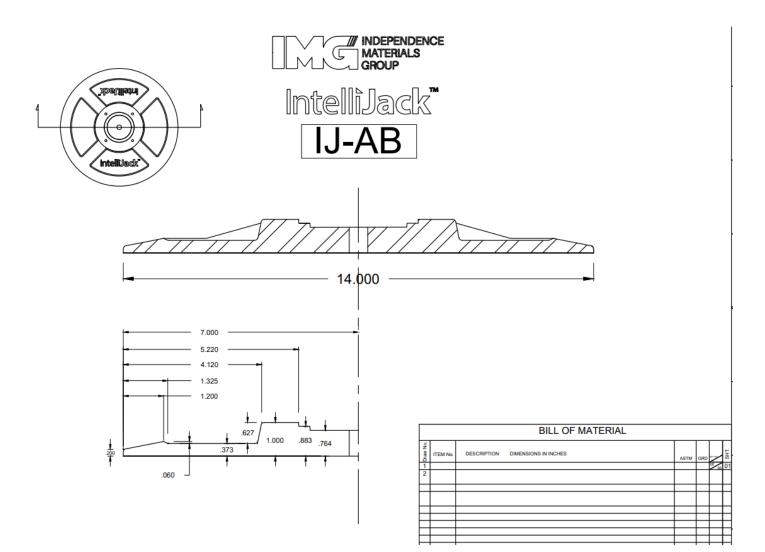

Intelli**Jack**™

Product Specifications

IMG INDEPENDENCE MATERIALS GROUP

IntelliJack Load Capacity

The allowable load carrying capacity for the IntelliJack is shown the PEI Code Evaluation Report, PER-19250. Allowable downward compressive load varies with column height but is established at 20.7 kips at an assembled height of 10 feet. Refer to the Evaluation Report for higher load values allowed at shorter column lengths. Allowable capacity for the IntelliJack system is likely to be governed by the footing design and available allowable soil pressure.

Installation for Permanent Applications

For applications where the construction is to be permanent, the threads of the lifting rod (IJ-LR) shall be damaged with a cold chisel after adjustment to the desired length. One screw thread immediately above the threaded cap shall be damaged for at least half its depth, and for a length of 1.5 inches to prevent loosening of the rod. Upward adjustment will still be feasible.

IJ-TP (Top Plate)

1/2" THK x 5" x 6" long, ASTM A36 hrp&o plate with four 0.313" holes at corners and one 1.75" OD x 0.25" thick wall x 1.25" long retaining ring centered on plate with 0.25" external fillet weld, all around.

Clear Zinc Electroplated to ASTM B633 Type III

IJ-35036, IJ-35060, IJ-35084, IJ-350120 (Mechanical Tubing)

3.50" OD x 0.165" thick wall ASTM A500, Grade C mechanical tubing, available 36", 60", 84" and 120" long and may be field cut to desired length.

Yield strength = 46 ksi (min)

Tensile strength =62 ksi (min)

Galvanized to ASTM A1057.

IJ-SP (Splice Plate)

Upper and lower 1/2" THK x 5" x 6" long ASTM A36 hrp&o plates with four 0.563" holes at corners with welded retaining ring on lower plate with same detail as IJ-TP. Plates are bolted with 4- 1/2" x 5.5" SAE Grade 5 bolts and nuts, sandwiching the S4x7.7 steel beam. Center of splices must align with center of support, below.

Clear Zinc Electroplated to ASTM B633 Type III

IJ-BO (Bolt On Beam Mount)

1- 1/2" THK x 5" x 6" long ASTM A36 hrp&o plate with four 0.563" holes at corners with welded retaining ring on lplate with same detail as IJ-TP. Plates bolted with 4- 1/2" x 5.5" SAE Grade 5 bolts and nuts, through the bottom flange of the S4x7.7 steel beam

Clear Zinc Electroplated to ASTM B633 Type III

IJ-BP (Bottom Plate)

1/2" THK x 3.5" x3.5" long ASTM A36 hrp&o Plate with one 0.563" hole centered on plate, and one 3.13" OD x 0.188" thick wall x 1" long ASTM A513 ring, internally welded to plate.

Clear Zinc Electroplated to ASTM B633 Type III

IJ-PB (Precast Base)

Commercially available, precast concrete post base with 3,000 psi (min) compressive strength, and 12" x 12" base footprint.

IJ-ES (Earth Spike)

5/8" x 18" long ASTM A615 G40 pointed reinforcing rod stake with welded nut.

Yield strength = 40,000 psi(min)

Tensile strength = 60,000 PEI(min)

IJ-LR (Lifting Rod)

1.25" diameter x 10" long ASTM F1554-GR55 S1 threaded rod with tack welded heavy hex nut Yield strength = 55 ksi (min)

Tensile strength = 75 ksi (min)

Clear Zinc Electroplated to ASTM B633 Type III

IJ-TC (Threaded Cap)

3.50" OD x 1.00" thick solid ASTM A108-13 (1018) disk CNC machined with 1.25"-7 threads and recessed shoulder to fit the inside diameter of the mechanical tubing.

Yield strength = 50 ksi (min)

Tensile strength = 68 ksi (min).

Clear Zinc Electroplated to ASTM B633 Type III

IJ-CS (Clip Support)

1/4" THK x 3.30" x 1.25" x 4.50" long, ASTM A36 hro&p plate with ends shaped to receive insertion of S4x7.7 beam flange, and 1.75" OD x 0.25" thick wall x 1.25" long retaining ring centered on plate with 0.25" external fillet weld, all around. Clear Zinc Electroplated to ASTM B633 Type III

S4x7.7 Supplemental Steel Beam

4.00" Tall X 2.63" wide, steel S shape (I-beam), ASTM A992, available 120" and 144" long, and may be field cut to desired length.

Yield Strength = 50 ksi (min)

Tensile strength = 65 ksi (min)

IJ-AB (Aluminum Base)

1" thick, at the hub, x 14.2" diameter AA 356.0-T5 cast aluminum base plate.

Yield strength = 20 ksi (min)

Tensile strength = 25 ksi (min)

IJ-IC (Precast Concrete Footing)

6" THK x 14" diameter, 5,000 psi (min), fiber reinforced, precast concrete footing with a 0.75" diameter hole at center, and ¾" chamfer at upper circumference.



Pei Evaluation Service* is an accredited ISO Standard 17065 Product Certifier, accredited by the IAS. This Product Evaluation Report represents a product that Pei ES has Evaluated. This product has a Product Evaluation Service Agreement & Follow-up Inspection Service Agreement. This Product Evaluation Report in no way implies warranty for this product or relieves Independence Materials Group, LLC of their liabilities for this product. This PER is an official document if it is within one year of the Initial or ReApproval date.

PER-19250

October, 2019

Re-Approved October, 2020

See all PEI ES reports at: www.p-e-i.com

Report Owner

Independence Materials Group, LLC (IMG) 1741 Corporate Landing Parkway Virginia Beach, VA 23454

Product

IntelliJack Support Columns

Approved Manufacturing Location

Independence Materials Group (IMG) 634 Rosewood Drive, Door 7 Columbia. SC 29201

Evaluation Report Information

www.independencematerialsgroup.com

IMG contact: Allen Gantt - (803) 807-8629

General Details

The following described support columns are evaluated for vertical compression load only. The support columns are intended for interior use in wood frame or light steel frame construction. These columns have a rust-inhibitive coating.

Product Description

The **IntelliJack** columns are a steel tube column with a loose bottom plate at one end and an adjustable screw at the other end. The columns are constructed of a Steel Tube, a Collar, Threaded Rod and two nuts. These columns have a 5" adjustability using the threaded rod with a damaged thread to limit travel.

Component Description

Steel Tube - 3-1/2" outside diameter by .165" thick made from ASTM A500 Steel, Grade B-C, $F_y \ge 50$ ksi, $F_u \ge 55$ ksi. and galvanized to ASTM A1057

Collar (threaded cap) - The collar is placed in one end of the steel tube. A threaded hole is in the center of the collar for the threaded rod. The collar is made from ASTM A1018 steel and zinc electroplated to meet ASTM B633, Type III.

Threaded Rod - The threaded rod is 1.25"-7 x 10" long. The threaded rod is made from ASTM F1554 Grade 55 Steel and is zinc electroplated to meet ASTM B633, Type III.

Nut - 1.25"-7 Heavy Hex nut, ASTM A563 Grade A with a zinc coating. One nut is welded to the threaded rod and one is used as a jam nut against collar.

Bottom Plate - The bottom plate is an assembly made from a 3-1/2" x 3-1/2" x 1/2" thick plate made from ASTM A36 steel and a 3/4" long piece of 3" outside diameter tube welded to the plate and is clear zinc electroplated to meet ASTM B633, Type III.

Top Plate - The top plate is an assembly made from a 6" x 5" x 1/2" thick plate made from ASTM A36 steel, with a 1-1/4" long piece of 1-3/4" outside diameter tube welded to the plate and is clear zinc electroplated to meet ASTM B633, Type III.

Code Compliance

IntelliJack Support Columns

2012 International Residential Code Section R407.2 and R407.3

2015 International Residential Code Section R407.2 and R407.3

2018 International Residential Code

Section R407.2 and R407.3

2012 International Building Code Section 104.11 and 2205.1

2015 International Building Code Section 104.11, 2205.1 and 2205.2

2018 International Building Code

Section 104.11, 2205.1 and 2205.2

Compliance with the following Standard

AISC-360-10 - Specification for Structural Steel Buildings-Allowable Stress Design

AISC-360-16 - Specification for Structural Steel Buildings-Allowable Stress Design

ICC-ES AC335 - Acceptance Criteria for Adjustable Steel Columns

General Product Use

- All columns shall be installed vertically plumb with either end up and bear on a footing capable of carrying the imposed load. The base and top of the column must be restrained to prevent lateral movement except where exempt by the Building Code.
- 2. These columns are intended for vertical compression load only. They have not been evaluated for any other load direction or type.
- 3. For applications where the construction is to be permanent, the threads of the lifting rod shall be damaged with a cold chisel after adjustment to the desired length. One screw thread immediately above the threaded cap shall be damaged for at least half its depth and for a length of 1-1/2" to prevent loosening of the rod.
- 4. The IMG IntelliJack nominal size is the support column at its shortest adjustment and must not be adjusted to a longer length by more than 5".
- The bearing capacity of the top and bottom plates and their attachment to load carrying members are outside of the scope of this evaluation report.
- If the basement slab is poured around the IntelliJack, a corrosive resistant coating must be applied to the parts of the IntelliJack that will be in contact with concrete.

Items Requiring Verification

The following items are related to the use of **IMG IntelliJack** support columns, but not within the scope of this evaluation specification. However these items are related to the determination of code compliance.

- 1. Design, calculations, and details for the building system verifying compliance with this report.
- Connections of the columns to the footing and supported structure.
- 3. Footing design and calculations for supporting the columns and the imposed load.
- 4. The bearing capacity of the beam/member supported.

Table 1 Load Rating for IntelliJack Columns

	3-1/2" O.D.		
Nominal Size	Allowable Load for ASD (lbs.)	Design Strength for LRFD (lbs.)	
12"	24,860	39,780	
96"	24,860	39,780	
108"	24,100	36,220	
120"	20,700	31,110	

Notes:

- All steel tube to be ASTM A500 F_v ≥ 50ksi, F_u ≥ 55ksi
- 2. Nominal size is the column at it's shortest adjustment
- Designed per AISC-360-16 ASD
- 4. LRFD Design Strength must be compared to factored loads

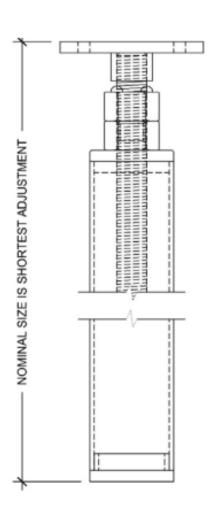


Figure 1 - IntelliJack Column





Figure 2 - Bottom Plate







Figure 3 - Top Plate



SIDE VIEW
Figure 5 - Clip Support

CLIP SUPPORT

Product Labeling

All columns manufactured by independence Materials Group that are covered by this PER must have a label attached with at least the following information:

- 1. Manufacturer Name
- 2. Load Capacity of Column
- 3. This PER Number & Pei ES Logo
- 4. On Adjustable Column Labels, the Minimum and Maximum Column Length

Acceptable Evaluation Marks



Product Documentation

A Product Evaluation Service Agreement between *Pei Evaluation Service** and Independence Materials Group, LLC
An Follow-up Inspection Service Agreement between *Progressive Engineering Inc.* and Independence Materials Group, LLC
A Independence Materials group, LLC - IntelliJack support columns Quality Control Manual - Dated: 9/23/2020
A Independence Materials Group, LLC - IntelliJack support columns Components Drawings - Dated: September, 2015

Pei Calculations No. 2019-3169 - IMG - Column Calculations - Dated: 6/18/2019 - stamped by a Professional Engineer

Pei Calculations No. 2019-3169 - IMG - Adjustment Screw Calculation - Dated: 11/1/2019 - stamped by a Professional Engineer

Pei Calculations No. 2020-0214 - IMG - Intellijack Eccentric Loaded Axial Capacity - Dated: 1/23/2020 - stamped by a Professional

Pei Calculations No. 2020-0214 - IMG - Intellijack Eccentric Loaded Axial Capacity - Dated: 1/23/2020 - stamped by a Professional Engineer

Pei Test Report 2019-6392 - Dated: 12/19/2019 - stamped by a Professional Engineer