


AUTHORITIES HAVING JURISDICTION
 BUILDING: HARNETT COUNTY
 ZONING: HARNETT COUNTY
 UTILITY: DUKE ENERGY PROGRESS

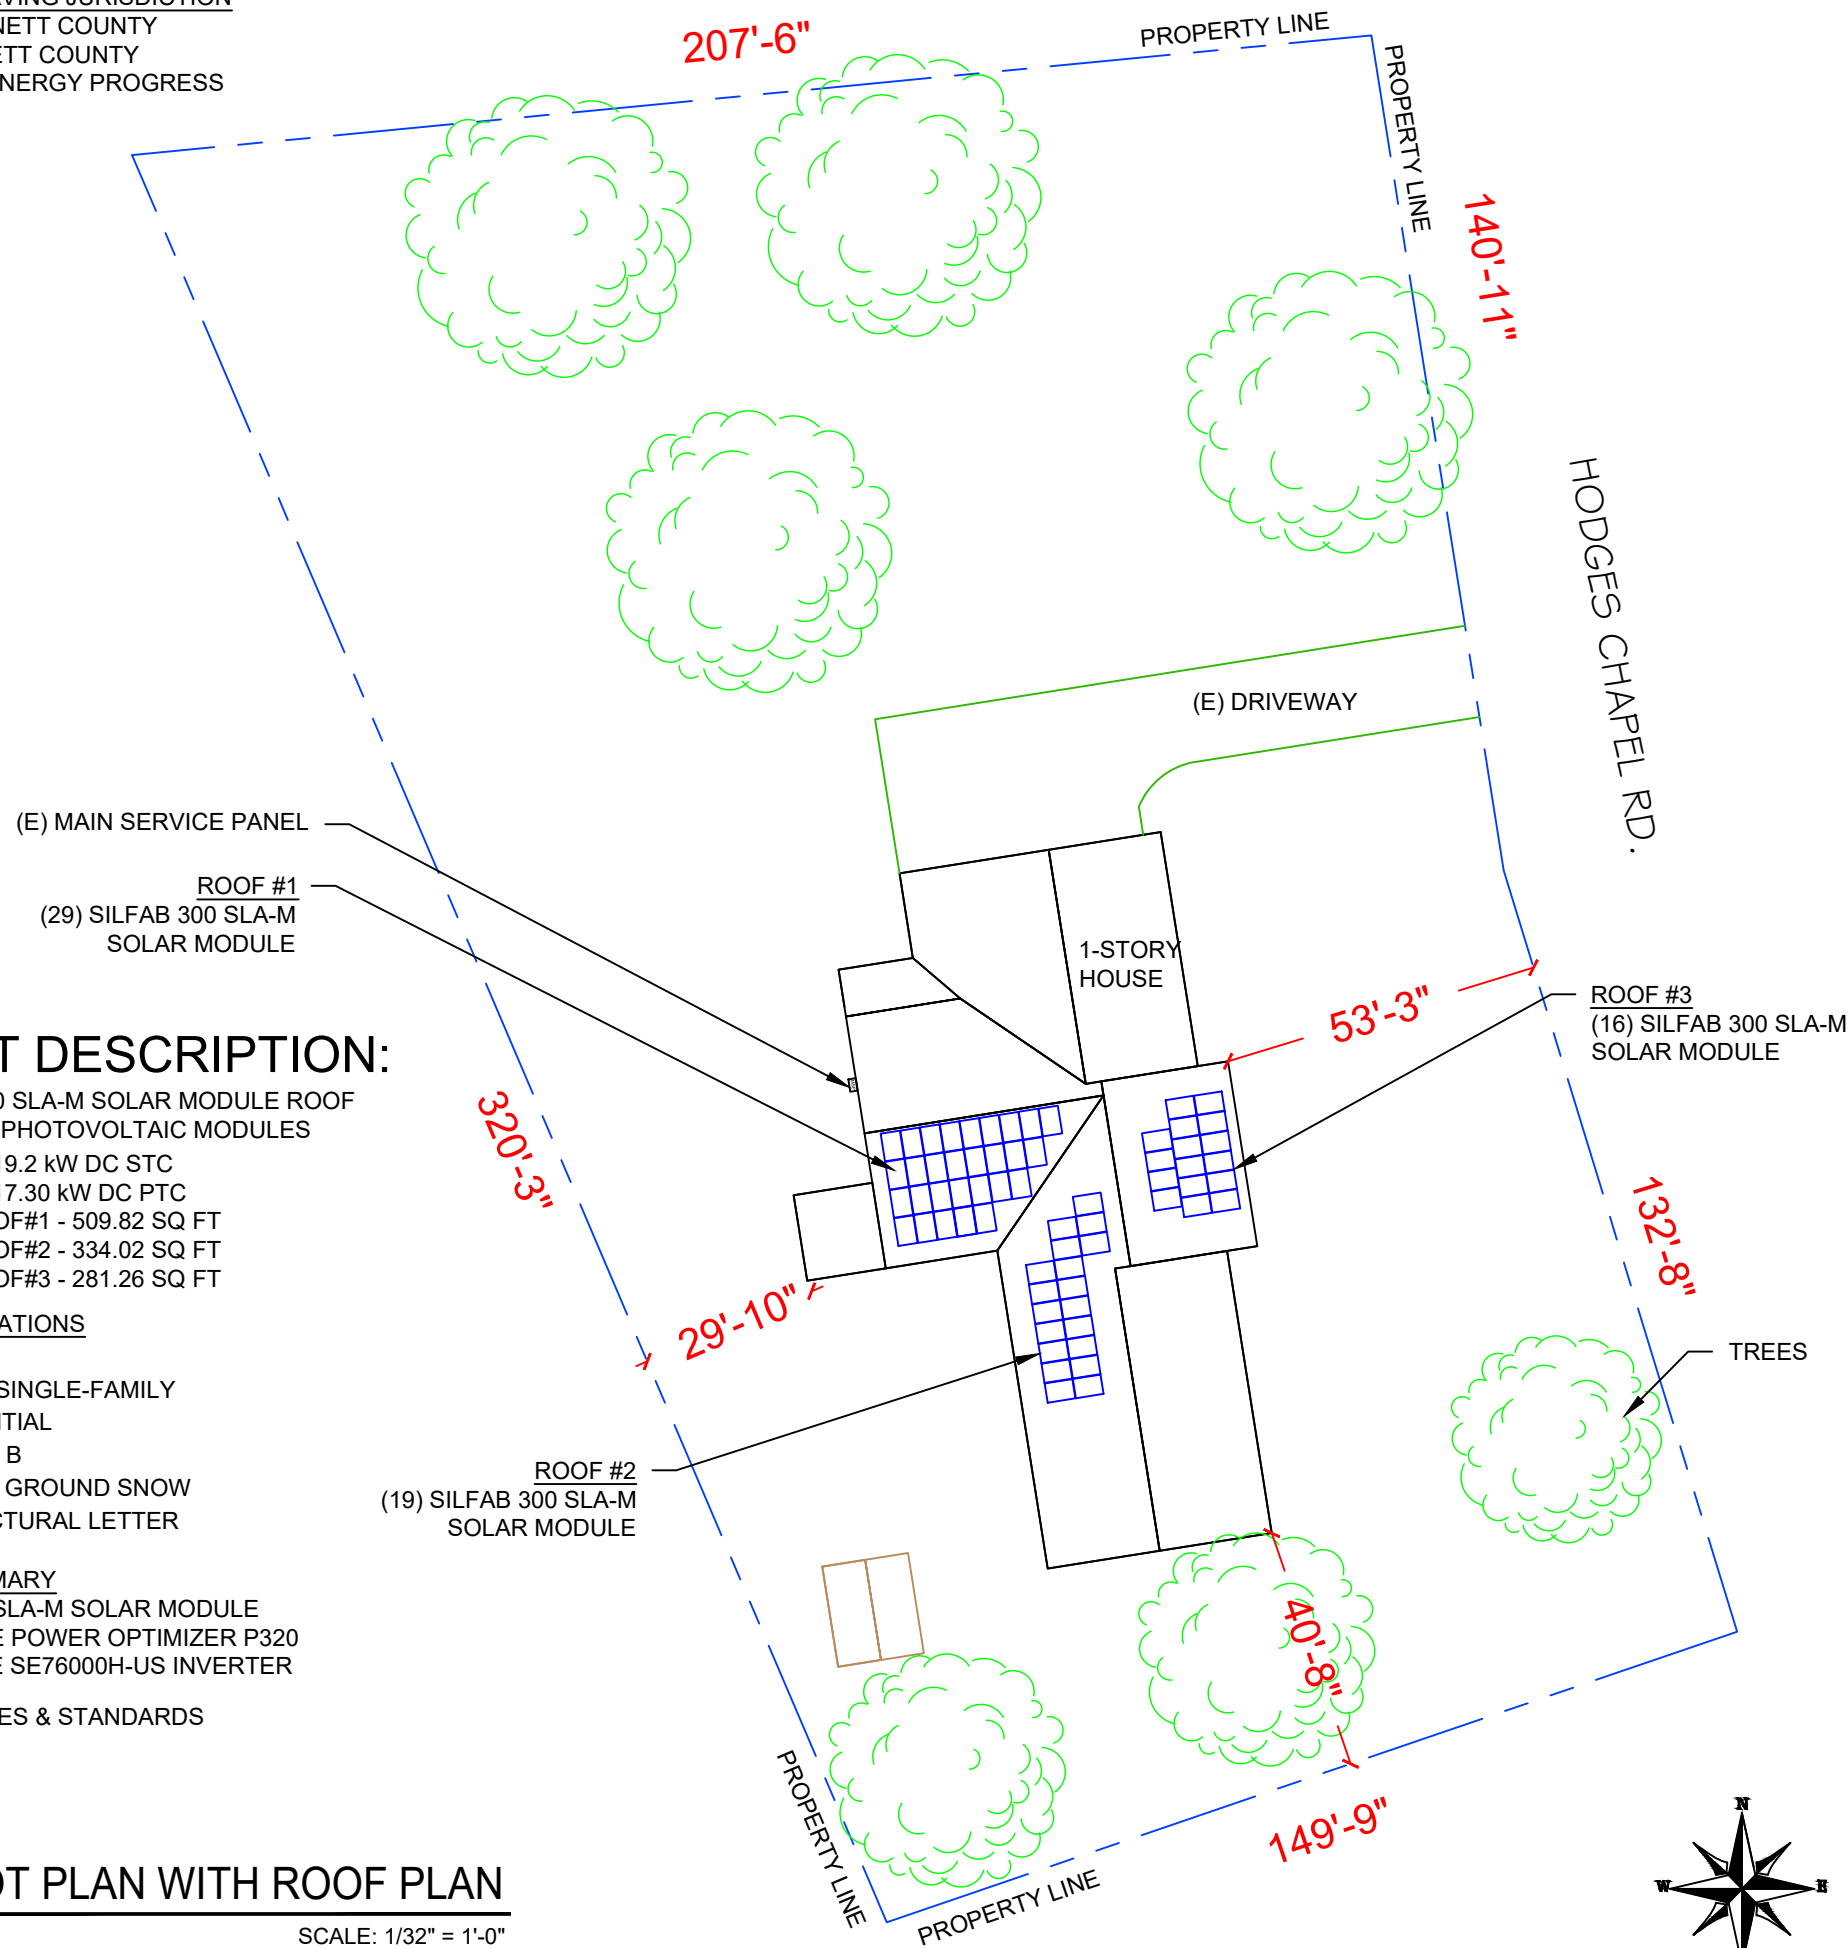

PROJECT DESCRIPTION:

64X300 SILFAB 300 SLA-M SOLAR MODULE ROOF MOUNTED SOLAR PHOTOVOLTAIC MODULES
 SYSTEM SIZE: 19.2 kW DC STC
 17.30 kW DC PTC
 ARRAY AREA: ROOF#1 - 509.82 SQ FT
 ARRAY AREA: ROOF#2 - 334.02 SQ FT
 ARRAY AREA: ROOF#3 - 281.26 SQ FT

DESIGN SPECIFICATIONS

OCCUPANCY: II
 CONSTRUCTION: SINGLE-FAMILY
 ZONING: RESIDENTIAL
 WIND EXPOSURE: B
 WIND SPEED AND GROUND SNOW LOAD: SEE STRUCTURAL LETTER

EQUIPMENT SUMMARY

64 SILFAB 300 SLA-M SOLAR MODULE
 64 SOLAREDGE POWER OPTIMIZER P320
 2 SOLAREDGE SE76000H-US INVERTER

APPLICABLE CODES & STANDARDS

NEC 2017
 NCBC 2018
 IRC 2012

1 PLOT PLAN WITH ROOF PLAN

PV-1

SCALE: 1/32" = 1'-0"

PROJECT SITE



2

HOUSE PHOTO

PV-1

SCALE: NTS



3

VICINITY MAP

PV-1

SCALE: NTS

SHEET INDEX

PV-1 PLOT PLAN & VICINITY MAP
 PV-2 ROOF PLAN & MODULES
 PV-2A STRING LAYOUT
 PV-3 ATTACHMENT DETAIL
 PV-4 ELECTRICAL LINE DIAGRAM
 PV-5 WIRING CALCULATIONS
 PV-6 SOLAREDGE OPTIMIZER CHART
 PV-7 to 12 EQUIPMENT SPECIFICATIONS



REVISIONS

DESCRIPTION	DATE	REV

Signature with Seal

DATE: 02/19/2019

PROJECT NAME & ADDRESS

DAVID PRINCE
 RESIDENCE
 3508 HODGES CHAPEL RD.
 DUNN, NC 28334

SHEET NAME

PLOT PLAN & VICINITY MAP

SHEET SIZE

ANSI B
 11" X 17"

SHEET NUMBER

PV-1

MODULE TYPE, DIMENSIONS & WEIGHT

NUMBER OF MODULES = 64 MODULES
 MODULE TYPE = SILFAB 300 SLA-M SOLAR MODULE
 MODULE WEIGHT = 41.89 LBS / 19 KG.
 MODULE DIMENSIONS = 64.96"x 38.98" = 17.58 SF
 UNIT WEIGHT OF ARRAY = 2.38 PSF

ROOF DESCRIPTION				
ROOF TYPE			CORRUGATED METAL.	
ROOF	ROOF TILT	AZIMUTH	RAFTER SIZE	RAFTER SPACING
#1	30.26°	171°	2"x6"	16" O.C.
#2	30.26°	262°	2"x6"	16" O.C.
#3	30.26°	82°	2"x6"	16" O.C.

ARRAY AREA & ROOF AREA CALC'S				
ROOF	# OF MODULES	ARRAY AREA (Sq. Ft.)	ROOF AREA (Sq. Ft.)	ROOF AREA COVERED BY ARRAY (%)
#1	29	509.82	673.87	76
#2	19	334.02	1275.27	26
#3	16	281.26	667.35	42

POWERHOME SOLAR & ROOFING
 POWER HOME SOLAR, LLC
 "POWER YOUR FUTURE"
 919 N. MAIN ST.
 MOORESVILLE, NC 28115
 Phone: 704-800-6591 (OFFICE)
 Email: info@powerhome.com
 Web: www.powerhome.com

REVISIONS		
DESCRIPTION	DATE	REV



Signature with Seal

 DATE: 02/19/2019

PROJECT NAME & ADDRESS


DAVID PRINCE RESIDENCE
 3508 HODGES CHAPEL RD.
 DUNN, NC 28334

SHEET NAME
ROOF PLAN & MODULES
 SHEET SIZE
ANSI B 11" X 17"
 SHEET NUMBER
PV-2

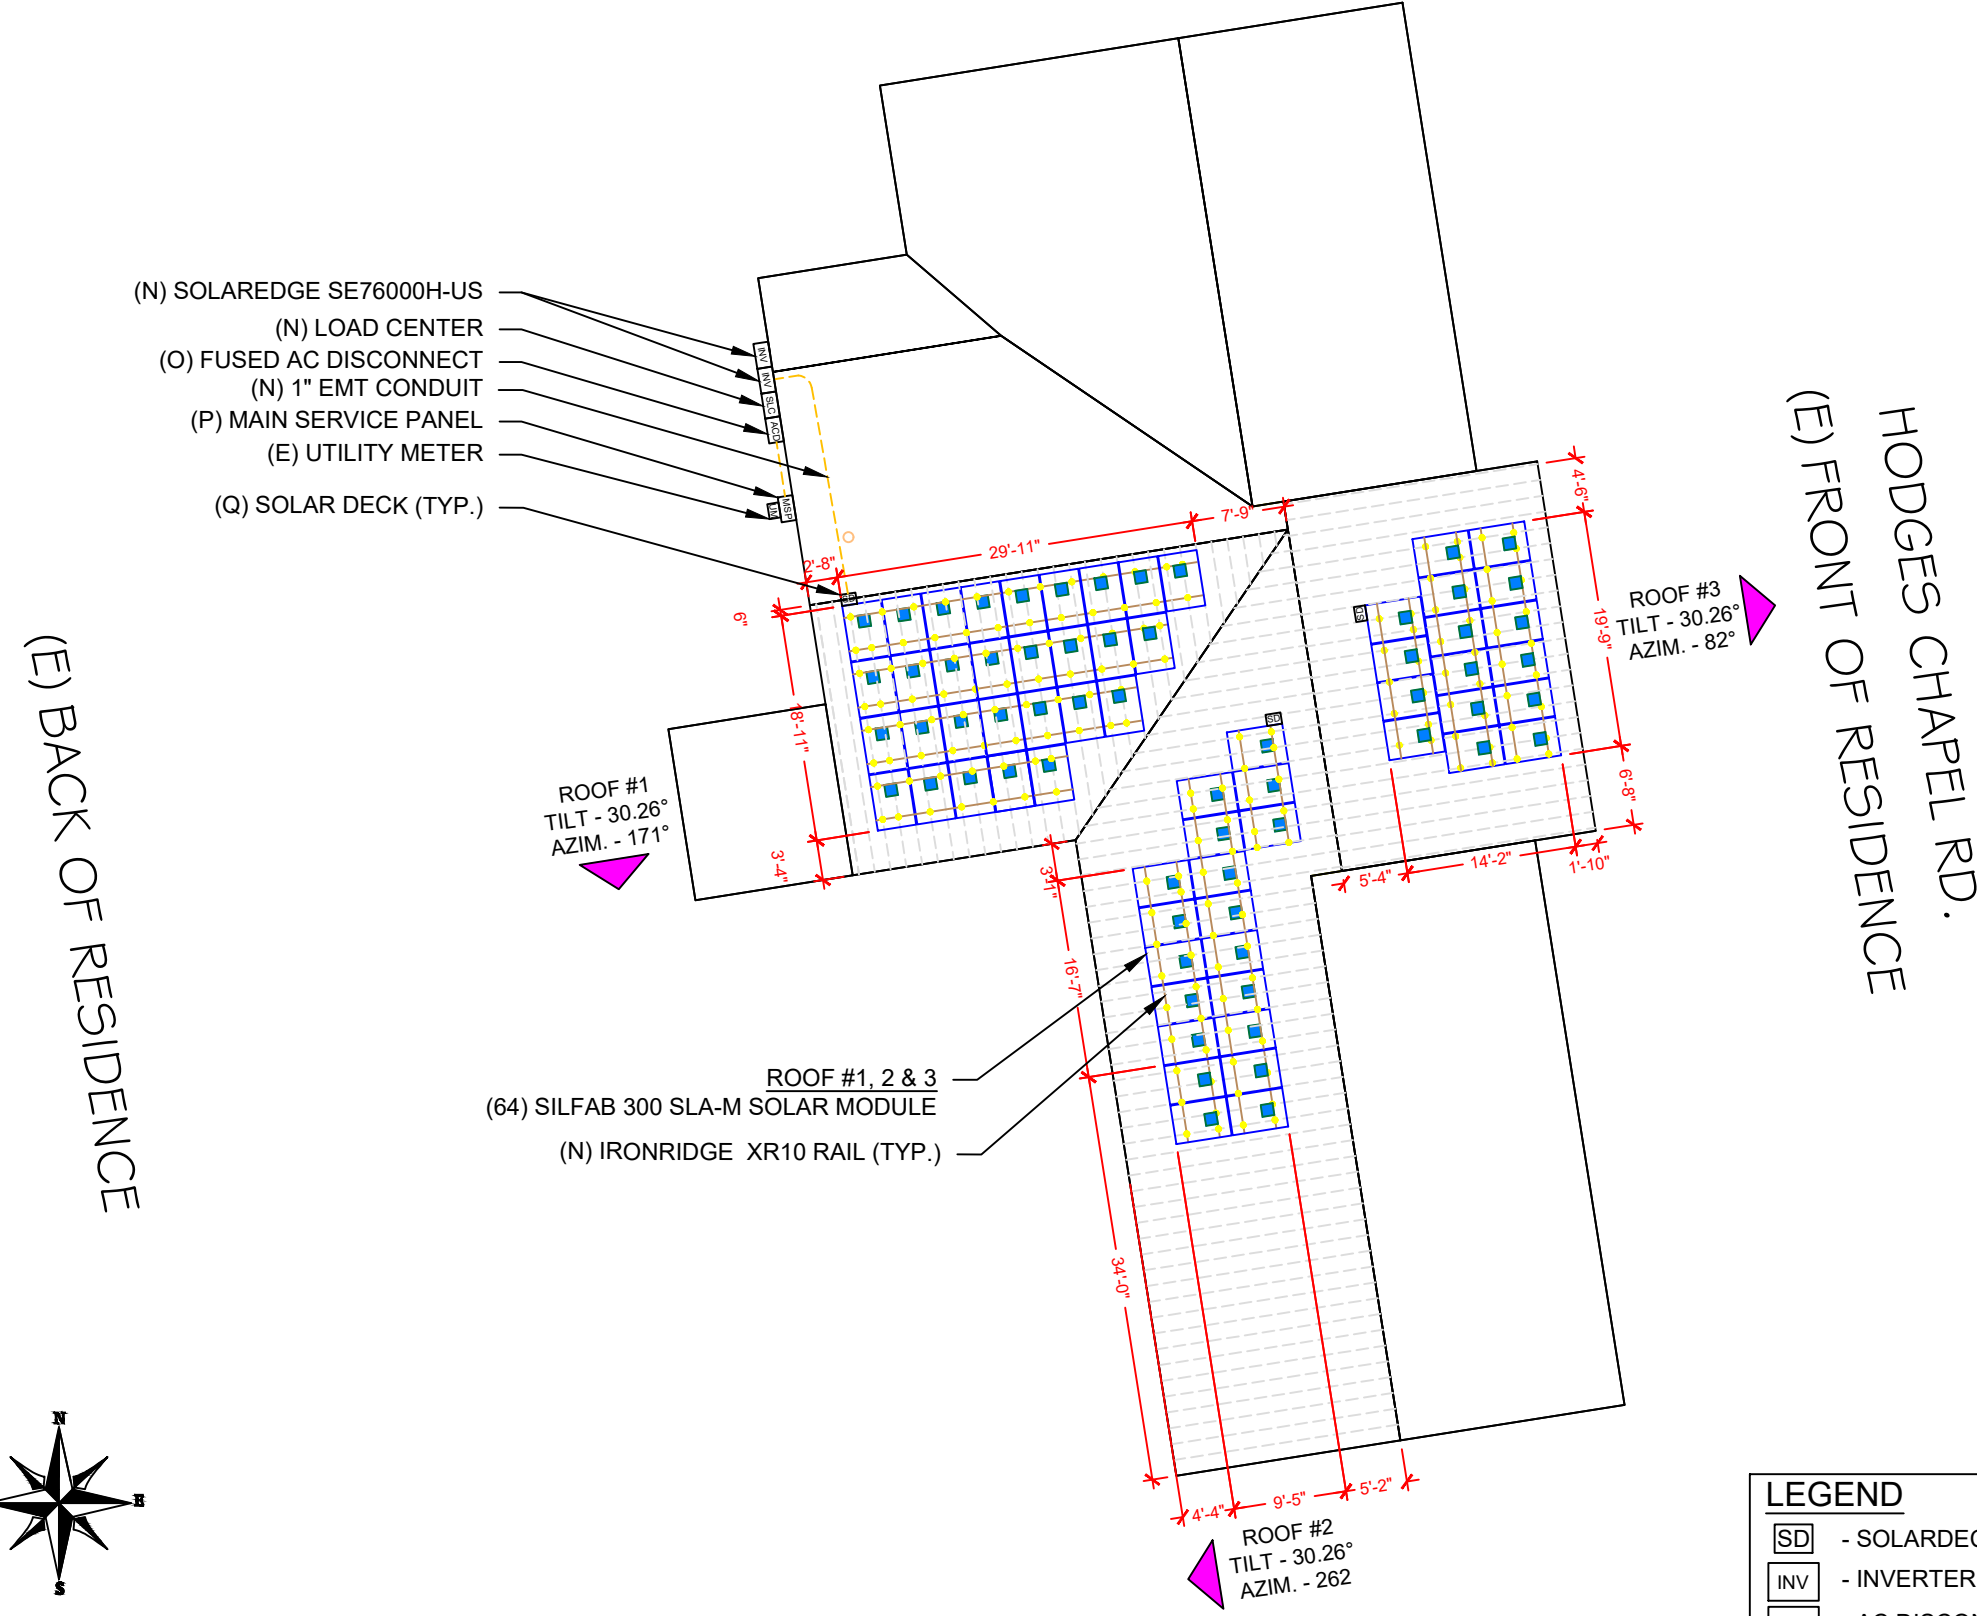

LEGEND

SD - SOLARDECK	 - VENT, ATTIC FAN (ROOF OBSTRUCTION)
INV - INVERTER	● - ROOF ATTACHMENT
AC - AC DISCONNECT	 - RAFTERS
MSP - MAIN SERVICE PANEL	 - CONDUIT





POWER HOME SOLAR, LLC
 "POWER YOUR FUTURE"
 919 N. MAIN ST.
 MOORESVILLE, NC 28115
 Phone: 704-800-6591 (OFFICE)
 Email: info@powerhome.com
 Web: www.powerhome.com

REVISIONS		
DESCRIPTION	DATE	REV

Signature with Seal

 DATE: 02/19/2019


PROJECT NAME & ADDRESS

DAVID PRINCE
 RESIDENCE
 3508 HODGES CHAPEL RD.
 DUNN, NC 28334

SHEET NAME
STRING LAYOUT

SHEET SIZE
**ANSI B
 11" X 17"**

SHEET NUMBER
PV-2A

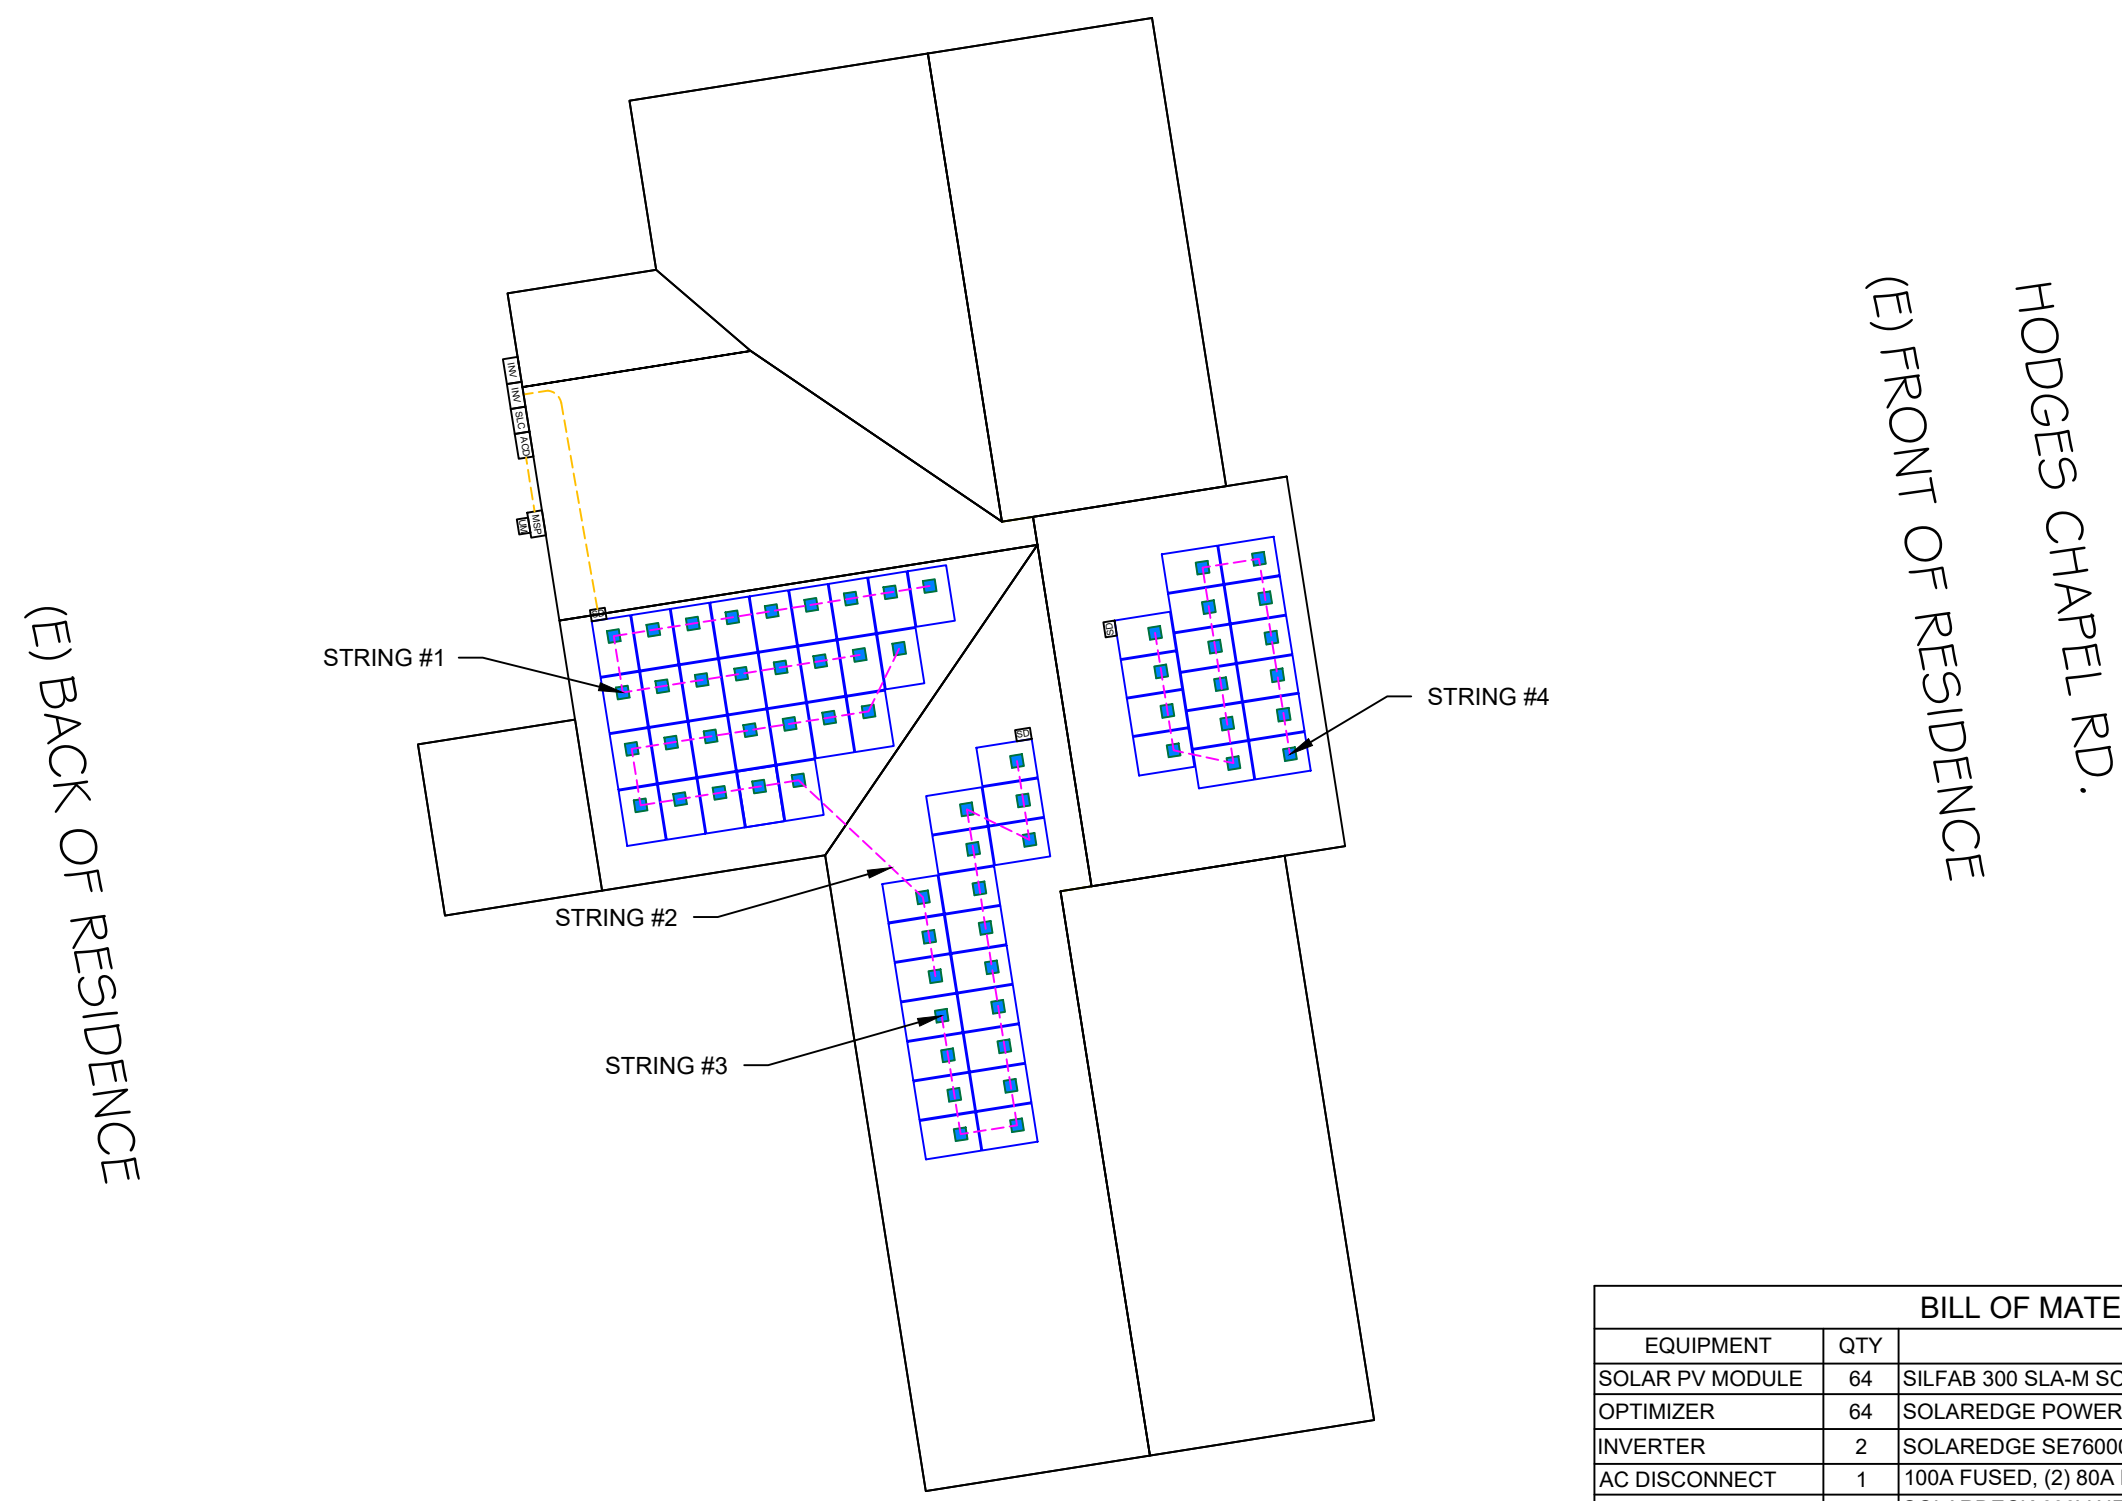

BILL OF MATERIALS		
EQUIPMENT	QTY	DESCRIPTION
SOLAR PV MODULE	64	SILFAB 300 SLA-M SOLAR MODULE
OPTIMIZER	64	SOLAREGE POWER OPTIMIZER P320
INVERTER	2	SOLAREGE SE76000H-US INVERTER
AC DISCONNECT	1	100A FUSED, (2) 80A FUSES, 240V NEMA 3R, UL LISTED,
SOLADECK	3	SOLARDECK 600V,NEMA 3UL LISTED
LOAD CENTER	1	100A SOLAR LOAD CENTER WITH (2) 40A/2P BREAKERS
ATTACHMENT	177	S5! PROTEA BRACKET ATTACHMENT
SQUARE-BOLT	177	SQUARE-BOLT BONDING ATTACHMENT HARDWARE
RAILS	28	IRONRIDGE XR10 RAIL-168" (14 FEET) BLACK
BONDED SPLICE	8	SPLICE KIT
MODULE CLAMPS	108	UNIVERSAL MODULE CLAMPS
END CLAMPS	40	END CLAMPS / STOPPER SLEEVE
GROUNDING LUG	10	IRONRIDGE GROUNDING LUG

REVISIONS		
DESCRIPTION	DATE	REV

Signature with Seal

DATE: 02/19/2019

PROJECT NAME & ADDRESS

DAVID PRINCE
RESIDENCE
3508 HODGES CHAPEL RD.
DUNN, NC 28334


SHEET NAME
ATTACHMENT
DETAIL

SHEET SIZE


ANSI B
11" X 17"

SHEET NUMBER

PV-3

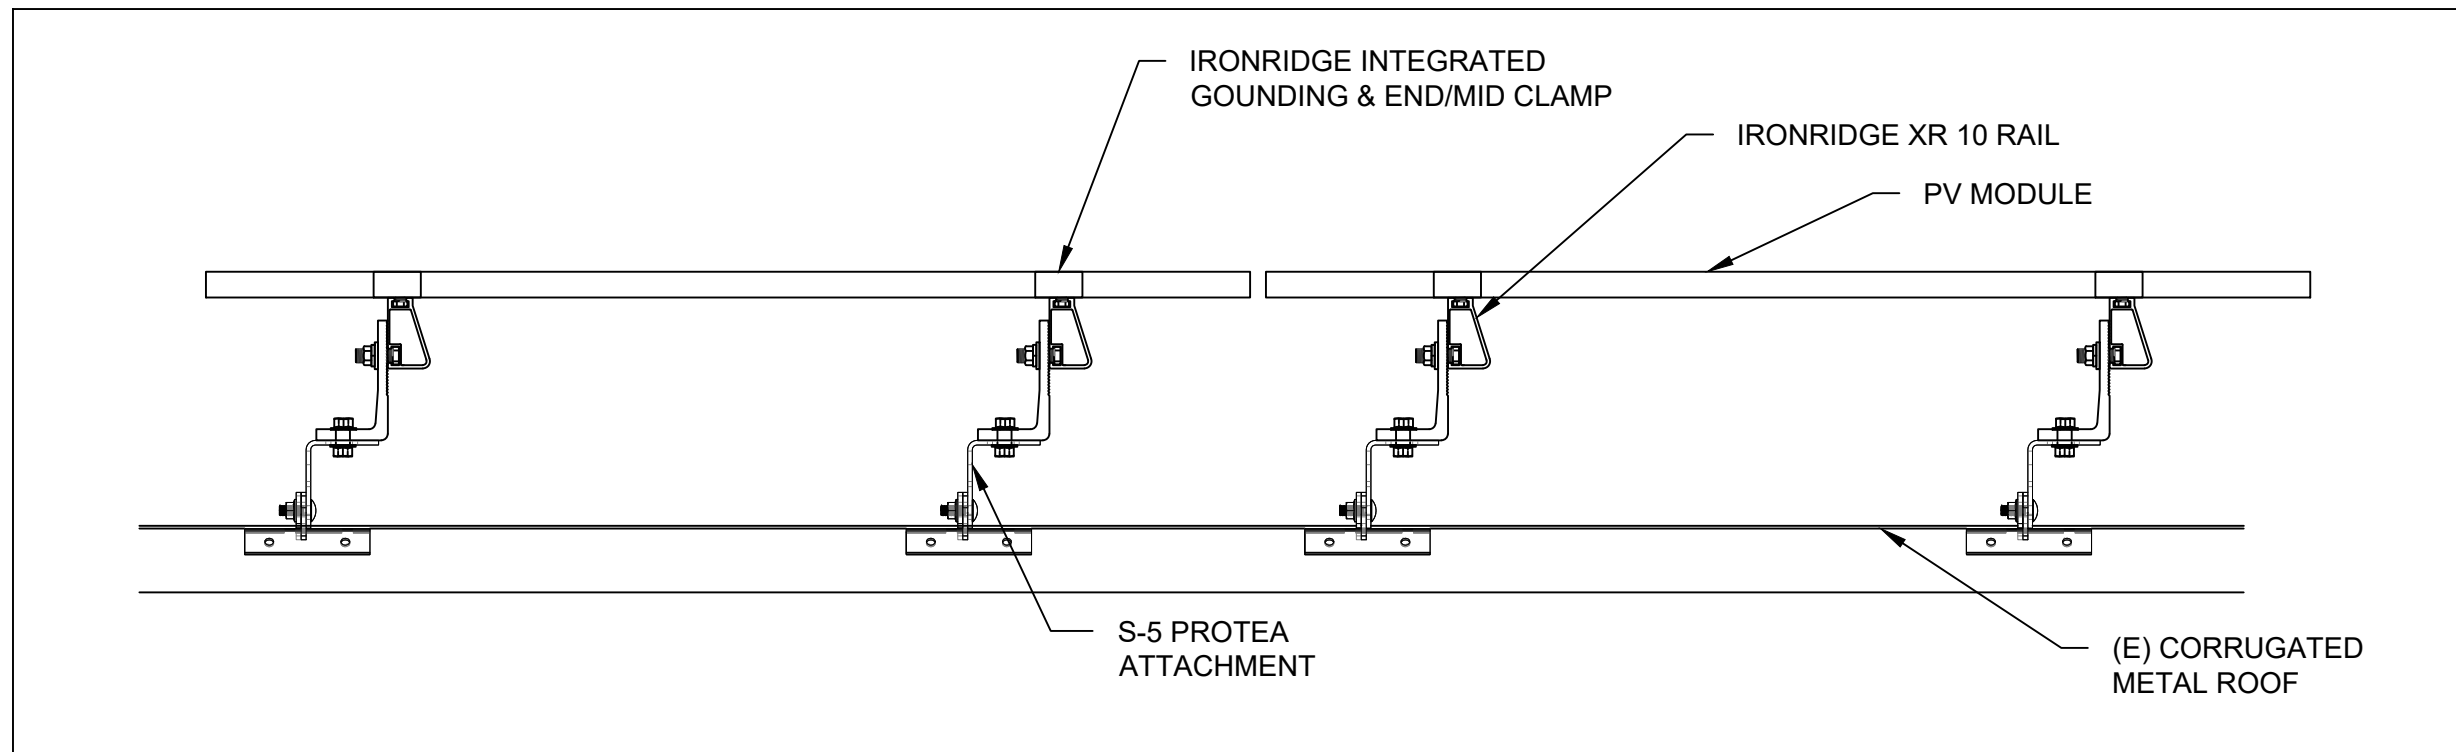

1 | **STRUCTURAL ATTACHMENT (SIDE VIEW)**
PV-3 | SCALE: 1" = 1'-0"

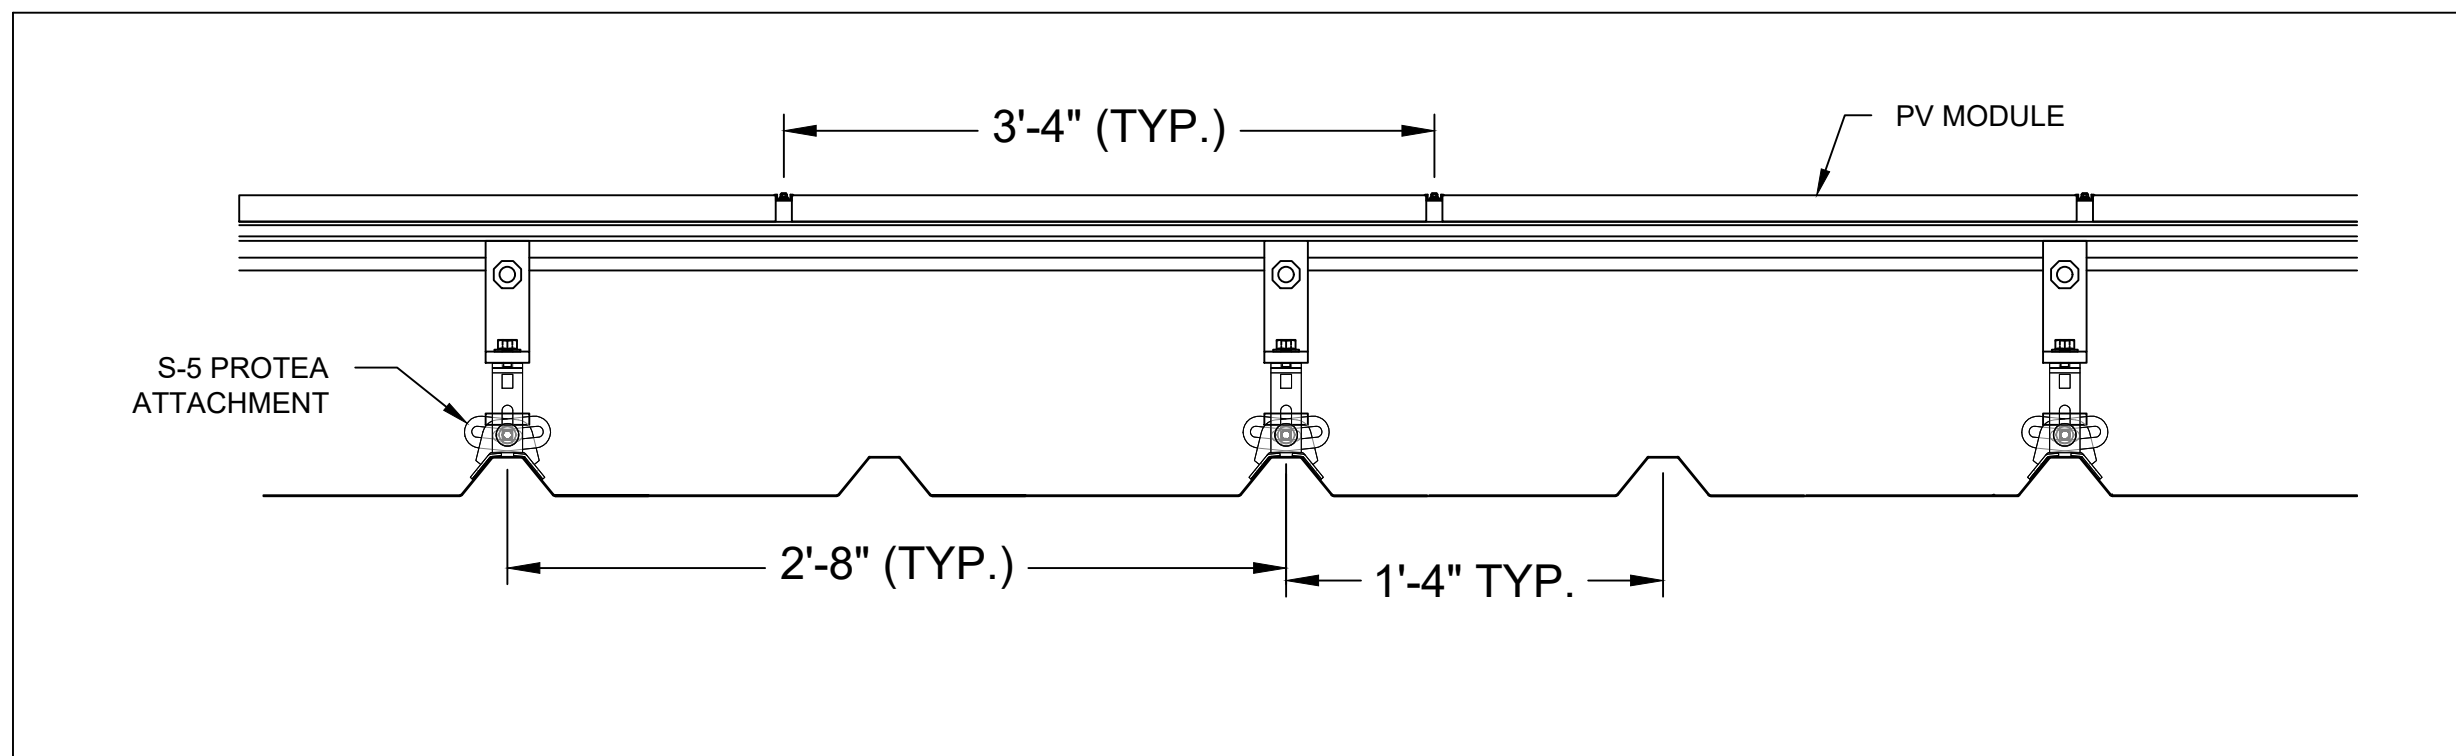


2 | **ATTACHMENT DETAIL (enlarged view)**
PV-3

(64) SILFAB 300 SLA-M SOLAR MODULE
 (2) STRINGS OF 16 MODULES,
 (2) STRINGS OF 16 MODULES CONNECTED IN SERIES

SOLAREEDGE SE7600H-US (240V)
 OUTPUT: 240 VAC, 32A
 99% CEC WEIGHTED EFFICIENCY
 NEMA 3R, UL LISTED, INTERNAL GFDI
 WITH INTEGRATED DC DISCONNECT

SILFAB 300 SLA-M SOLAR
 MODULE MODULES

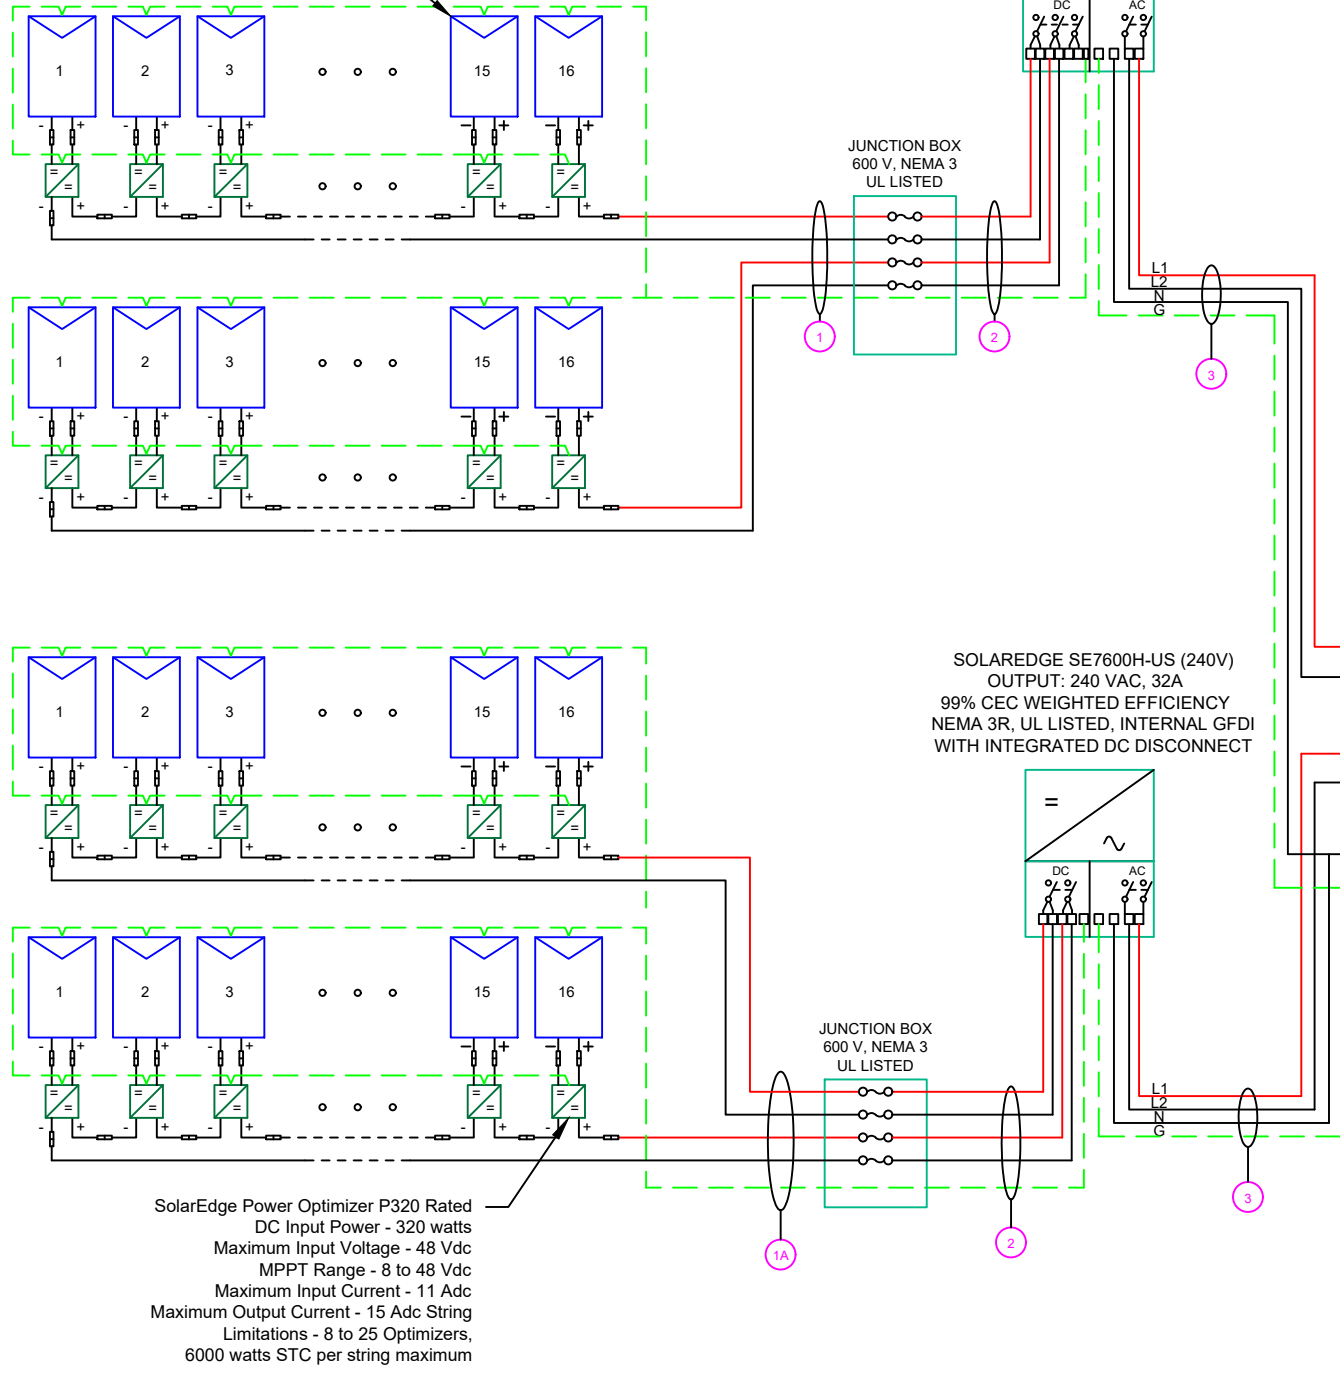

AC DISCONNECT:
 100A FUSED, (2) 80A
 FUSES, 240V NEMA 3R,
 UL LISTED,

100A LOAD CENTER

SOLAREEDGE SE7600H-US (240V)
 OUTPUT: 240 VAC, 32A
 99% CEC WEIGHTED EFFICIENCY
 NEMA 3R, UL LISTED, INTERNAL GFDI
 WITH INTEGRATED DC DISCONNECT

JUNCTION BOX
 600 V, NEMA 3
 UL LISTED

SolarEdge Power Optimizer P320 Rated
 DC Input Power - 320 watts
 Maximum Input Voltage - 48 Vdc
 MPPT Range - 8 to 48 Vdc
 Maximum Input Current - 11 Adc
 Maximum Output Current - 15 Adc String
 Limitations - 8 to 25 Optimizers,
 6000 watts STC per string maximum

**WARNING PHOTOVOLTAIC
 POWER SOURCE**
 LABEL 1
 ON ALL CONDUITS SPACED AT MAX 10FT

CAUTION!
 SOLAR ELECTRIC
 SYSTEM CONNECTED
 AND ENERGIZED
 LABEL 2
 AT INVERTER
 SOLAR PV SYSTEM EQUIPPED
 WITH RAMP SHUT-OFFS
 LABEL 3
 AT INVERTER
**PHOTOVOLTAIC
 DC DISCONNECT**
 LABEL 4
 AT EACH DC DISCONNECT

WARNING!
 ALL LIVE ELECTRICAL
 PARTS OF THE SYSTEM
 ARE TO BE CONSIDERED
 ENERGIZED UNLESS
 OTHERWISE NOTED
 LABEL 5
 AT EACH AC DISCONNECT
**PHOTOVOLTAIC
 AC DISCONNECT**
 LABEL 6
 AT EACH AC DISCONNECT

WARNING!
 DUAL POWER SOURCES
 SECOND SOURCE IS PV SYSTEM
 LABEL 8
 AT MEPF
WARNING!
 SOLAR SYSTEM CONNECTED
 AND ENERGIZED
 LABEL 9
 AT MEPF

CAUTION!
 SOLAR POINT OF
 INTERCONNECTION
 LABEL 10
 AT UTILITY METER
WARNING!
 THE SERVICE METER IS ALSO SERVED BY
 A PHOTOVOLTAIC SYSTEM
 LABEL 11
 AT UTILITY METER

QTY	CONDUCTOR INFORMATION	CONDUIT TYPE	CONDUIT SIZE
(8)	#10AWG - PV WIRE/USE-2	N/A	N/A
(1)	#6AWG - BARE COPPER IN FREE AIR	N/A	N/A
(8)	#10AWG - THWN-2	N/A	N/A
(1)	#6AWG - THWN-2 GND	EMT OR FLEX IN ATTIC	1"
(6)	#6AWG - THWN-2	PVC	1 1/4"
(1)	#6AWG - THWN-2 GND	PVC	1 1/4"
(3)	#4AWG - THWN-2	PVC	1 1/4"
(1)	#6AWG - THWN-2 GND	PVC	1 1/4"
(3)	#4AWG - THWN-2	PVC	1 1/4"

SERVICE INFO

UTILITY PROVIDER: DUKE ENERGY PROGRESS

MAIN SERVICE VOLTAGE: 240V
 MAIN PANEL BRAND: N/A
 MAIN SERVICE PANEL: 200A
 MAIN CIRCUIT BREAKER RATING: 200A
 MAIN SERVICE LOCATION: WEST
 SERVICE FEED SOURCE: OVERHEAD

1 ELECTRICAL LINE DIAGRAM

PV-4 SCALE: NTS

POWERHOME SOLAR & ROOFING
 POWER HOME SOLAR, LLC
 "POWER YOUR FUTURE"
 919 N. MAIN ST.
 MOORESVILLE, NC 28115
 Phone: 704-800-6591 (OFFICE)
 Email: info@powerhome.com
 Web: www.powerhome.com

REVISIONS

DESCRIPTION	DATE	REV

Signature with Seal

DATE: 02/19/2019

PROJECT NAME & ADDRESS

**DAVID PRINCE
 RESIDENCE
 3508 HODGES CHAPEL RD.
 DUNN, NC 28334**

SHEET NAME
**ELECTRICAL LINE
 DIAGRAM**

SHEET SIZE
**ANSI B
 11" X 17"**

SHEET NUMBER
PV-4

SOLAR MODULE SPECIFICATIONS	
MANUFACTURER / MODEL #	SILFAB 300 SLA-M SOLAR MODULE
VMP	32.8V
IMP	9.16A
VOC	39.85V
ISC	9.71A
TEMP. COEFF. VOC	-0.30%/°C
PTC RATING	270.4W
MODULE DIMENSION	64.96"L x 38.98"W x 1.50"D (In Inch)

INVERTER #1 SPECIFICATIONS	
MANUFACTURER / MODEL #	SOLAREEDGE SE76000H-US
NOMINAL AC POWER	7.6 KW
NOMINAL OUTPUT VOLTAGE	240 VAC
NOMINAL OUTPUT CURRENT	3.2A

POWER OPTIMIZER (OPTIMIZER P320)	
MAXIMUM INPUT POWER	320W
MINIMUM INPUT VOLTAGE	8 VDC
MAXIMUM INPUT VOLTAGE	48VDC
MAXIMUM MODULE ISC	11 ADC
MAXIMUM OUTPUT CURRENT	15 ADC

PERCENT OF VALUES	NUMBER OF CURRENT CARRYING CONDUCTORS IN EMT
0.80	4-6
0.70	7-9
0.50	10-20

AMBIENT TEMPERATURE SPECS	
RECORD LOW TEMP	-10°
AMBIENT TEMP (HIGH TEMP 2%)	35°
CONDUIT HEIGHT	0.5"
ROOF TOP TEMP	90°
CONDUCTOR TEMPERATURE RATE	57°
MODULE TEMPERATURE COEFFICIENT OF Voc	-0.30%/°C

DC CONDUCTOR AMPACITY CALCULATIONS: ARRAY TO SOLAR DECK:

EXPECTED WIRE TEMP (In Celsius)	35°
TEMP. CORRECTION PER TABLE (310.16)	0.96
NO. OF CURRENT CARRYING CONDUCTORS	8
CONDUIT FILL CORRECTION PER NEC 310.15(B)(2)(a)	0.7
CIRCUIT CONDUCTOR SIZE	10 AWG
CIRCUIT CONDUCTOR AMPACITY	40A

REQUIRED CIRCUIT CONDUCTOR AMPACITY PER NEC 690.8(A&B)	18.75A
1.25 X Isc	
DERATED AMPACITY OF CIRCUIT CONDUCTOR PER NEC TABLE 310.16	
CONDUIT FILL CORRECTION PER NEC 310.15(B)(2)(a) X CIRCUIT CONDUCTOR AMPACITY	28A
Result should be greater than (18.75A) otherwise less the entry for circuit conductor size and ampacity	

DC CONDUCTOR AMPACITY CALCULATIONS: FROM SOLAR DECK TO INVERTER #1/#2:

AMBIENT TEMPERATURE ADJUSTMENT FOR EXPOSED CONDUIT PER NEC 310.15(B)(2)(c)	22°
EXPECTED WIRE TEMP (In Celsius)	35°+22° = 57°
TEMP. CORRECTION PER TABLE (310.16)	0.71
NO. OF CURRENT CARRYING CONDUCTORS	8
CONDUIT FILL CORRECTION PER NEC 310.15(B)(2)(a)	.7
CIRCUIT CONDUCTOR SIZE	10 AWG
CIRCUIT CONDUCTOR AMPACITY	40A

REQUIRED CIRCUIT CONDUCTOR AMPACITY PER NEC 690.8(A&B)	18.75A
1.25 X Isc	
DERATED AMPACITY OF CIRCUIT CONDUCTOR PER NEC TABLE 310.16	
CONDUIT FILL CORRECTION PER NEC 310.15(B)(2)(a) X CIRCUIT CONDUCTOR AMPACITY	28A
Result should be greater than (18.75A) otherwise less the entry for circuit conductor size and ampacity	

INVERTER #1 & #2 TO LOAD CENTER CALCULATIONS:

No. OF INVERTER	2
EXPECTED WIRE TEMP (In Celsius)	35°
TEMP. CORRECTION PER TABLE (310.16)	0.96
NO. OF CURRENT CARRYING CONDUCTORS	3
CONDUIT FILL CORRECTION PER NEC 310.15(B)(2)(a)	1
CIRCUIT CONDUCTOR SIZE	6 AWG
CIRCUIT CONDUCTOR AMPACITY	75A

REQUIRED CIRCUIT CONDUCTOR AMPACITY PER NEC 690.8(B)	40A
1.25 X MAX INVERTER OUTPUT CURRENT (#INV1 & #INV2)	
DERATED AMPACITY OF CIRCUIT CONDUCTOR PER NEC TABLE 310.16	
TEMP. CORRECTION PER TABLE (310.16) X CONDUIT FILL CORRECTION PER NEC 310.15(B)(2)(a) X CIRCUIT CONDUCTOR AMPACITY	72A
Result should be greater than (80A) otherwise less the entry for circuit conductor size and ampacity	

LOAD CENTER OT MSP CALCULATIONS:

No. OF INVERTER	1
EXPECTED WIRE TEMP (In Celsius)	34°
TEMP. CORRECTION PER TABLE (310.16)	0.96
NO. OF CURRENT CARRYING CONDUCTORS	3
CONDUIT FILL CORRECTION PER NEC 310.15(B)(2)(a)	1
CIRCUIT CONDUCTOR SIZE	4 AWG
CIRCUIT CONDUCTOR AMPACITY	95A

REQUIRED CIRCUIT CONDUCTOR AMPACITY PER NEC 690.8(B)	80A
1.25 X MAX INVERTER OUTPUT CURRENT	
DERATED AMPACITY OF CIRCUIT CONDUCTOR PER NEC TABLE 310.16	
TEMP. CORRECTION PER TABLE (310.16) X CONDUIT FILL CORRECTION PER NEC 310.15(B)(2)(a) X CIRCUIT CONDUCTOR AMPACITY	91.2A
Result should be greater than (80A) otherwise less the entry for circuit conductor size and ampacity	

ELECTRICAL NOTES

- 1.) ALL EQUIPMENT TO BE LISTED BY UL OR OTHER NRTL, AND LABELED FOR ITS APPLICATION.
- 2.) ALL CONDUCTORS SHALL BE COPPER, RATED FOR 600 V AND 90 DEGREE C WET ENVIRONMENT.
- 3.) WIRING, CONDUIT, AND RACEWAYS MOUNTED ON ROOFTOPS SHALL BE ROUTED DIRECTLY TO, AND LOCATED AS CLOSE AS POSSIBLE TO THE NEAREST RIDGE, HIP, OR VALLEY.
- 4.) WORKING CLEARANCES AROUND ALL NEW AND EXISTING ELECTRICAL EQUIPMENT SHALL COMPLY WITH NEC 110.26.
- 5.) DRAWINGS INDICATE THE GENERAL ARRANGEMENT OF SYSTEMS. CONTRACTOR SHALL FURNISH ALL NECESSARY OUTLETS, SUPPORTS, FITTINGS AND ACCESSORIES TO FULFILL APPLICABLE CODES AND STANDARDS.
- 6.) WHERE SIZES OF SOLADECK, RACEWAYS, AND CONDUITS ARE NOT SPECIFIED, THE CONTRACTOR SHALL SIZE THEM ACCORDINGLY.
- 7.) ALL WIRE TERMINATIONS SHALL BE APPROPRIATELY LABELED AND READILY VISIBLE.
- 8.) MODULE GROUNDING CLIPS TO BE INSTALLED BETWEEN MODULE FRAME AND MODULE SUPPORT RAIL, PER THE GROUNDING CLIP MANUFACTURER'S INSTRUCTION.
- 9.) MODULE SUPPORT RAIL TO BE BONDED TO CONTINUOUS COPPER G.E.C. VIA WEEB LUG OR ILSCO GBL-4DBT LAY-IN LUG.
- 10.) THE POLARITY OF THE GROUNDED CONDUCTORS IS NEGATIVE



REVISIONS		
DESCRIPTION	DATE	REV

Signature with Seal

DATE: 02/19/2019

PROJECT NAME & ADDRESS

**DAVID PRINCE
 RESIDENCE
 3508 HODGES CHAPEL RD.
 DUNN, NC 28334**

SHEET NAME
**WIRING
 CALCULATIONS**


SHEET SIZE
**ANSI B
 11" X 17"**

SHEET NUMBER
PV-5


1-10 11-20 21-30 31-40 41-50 51-60

1
2
3
4
5
6
7
8
9
10

SOLAREEDGE OPTIMIZER CHART

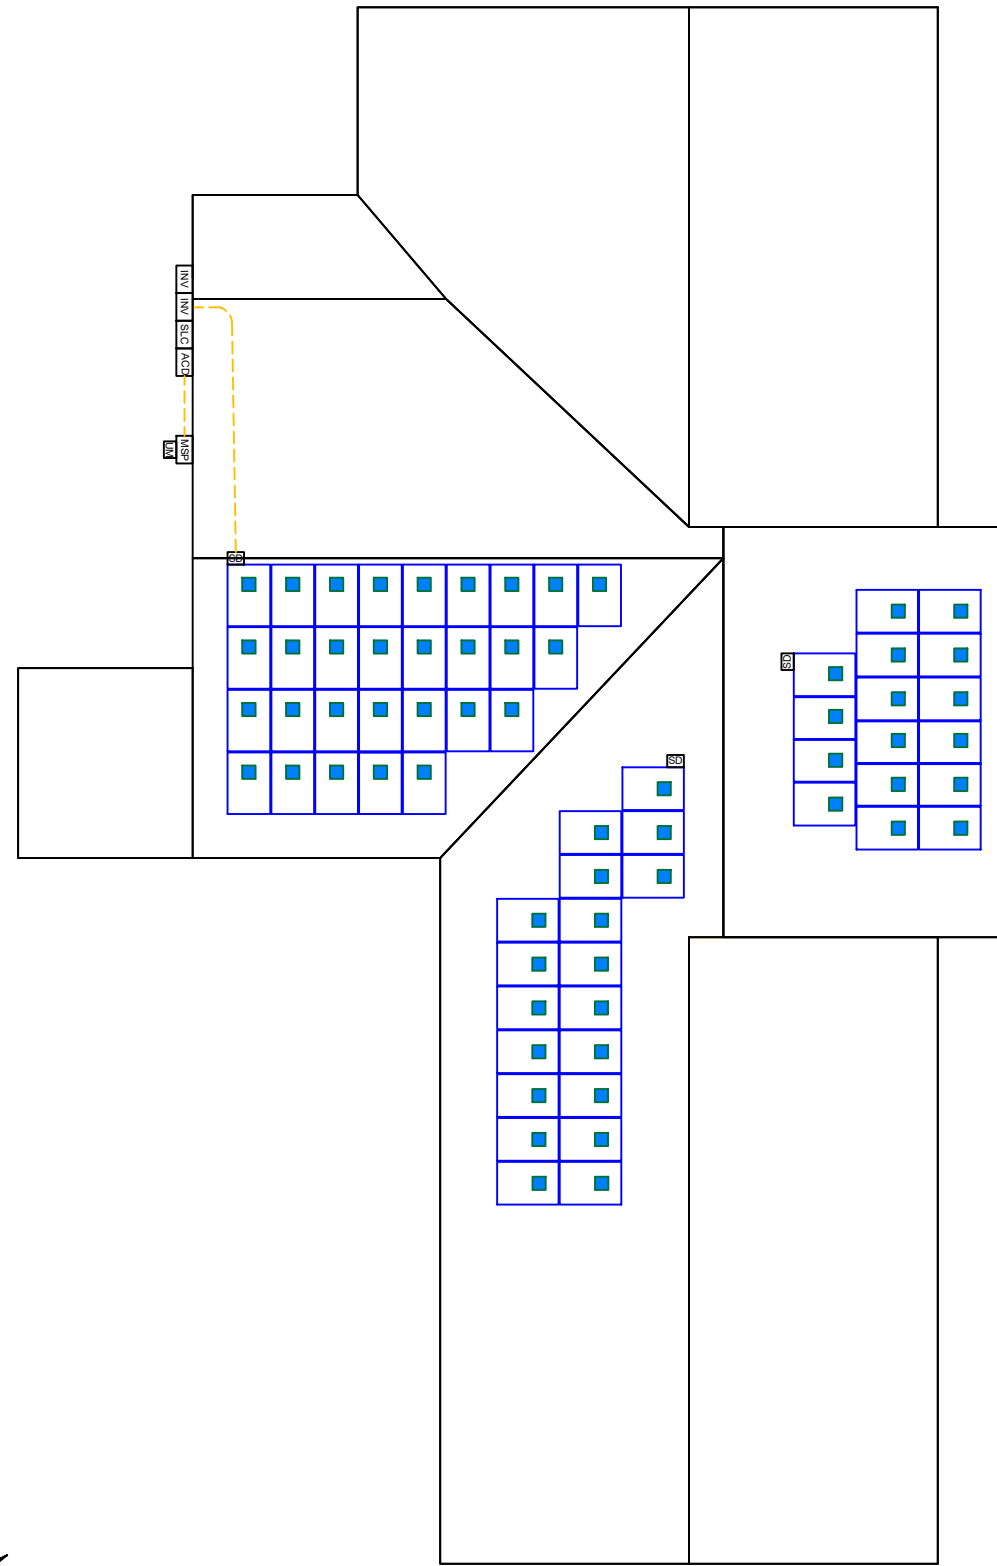

HODGES CHAPEL RD.



POWERHOME SOLAR & ROOFING
 POWER HOME SOLAR, LLC
 "POWER YOUR FUTURE"
 919 N. MAIN ST.
 MOORESVILLE, NC 28115
 Phone: 704-800-6591 (OFFICE)
 Email: info@powerhome.com
 Web: www.powerhome.com

REVISIONS		
DESCRIPTION	DATE	REV

Signature with Seal

 DATE: 02/19/2019

PROJECT NAME & ADDRESS

**DAVID PRINCE
 RESIDENCE**
 3508 HODGES CHAPEL RD.
 DUNN, NC 28334

SHEET NAME
**SOLAREEDGE
 OPTIMIZER CHART**

SHEET SIZE
**ANSI B
 11" X 17"**

SHEET NUMBER
PV-6



SLA-M Monocrystalline



**300 Wp
60 Cell
Monocrystalline
PV Module**

100% MAXIMUM POWER DENSITY
Silfab's SLA-M 300 ultra-high-efficiency modules are optimized for both Residential and Commercial projects where maximum power density is preferred.

100% NORTH AMERICAN QUALITY MATTERS
Silfab's fully-automated manufacturing facility ensures precision engineering is applied at every stage. Superior reliability and performance combine to produce one of the highest quality modules with the lowest defect rate in the industry.

NORTH AMERICAN CUSTOMIZED SERVICE
Silfab's 100% North American based team leverages just-in-time manufacturing to deliver unparalleled service, on-time delivery and flexible project solutions.



- ENSURES MAXIMUM EFFICIENCY**
60 of the highest efficiency, premium quality monocrystalline cells result in a maximum power rating of 300Wp.
- ADVANCED PERFORMANCE WARRANTY**
25-year linear power performance guarantee to 82%
- ENHANCED PRODUCT WARRANTY**
12-year product/workmanship warranty
- BUILT BY INDUSTRY EXPERTS**
With over 35 years of industry experience, Silfab's technical team are pioneers in PV technology and are dedicated to an innovative approach that provides superior manufacturing processes including: infra-red cell sorting, glass washing, automated soldering and meticulous cell alignment.
- POSITIVE TOLERANCE**
(-0/+5W) All positive module sorting ensures maximum performance

- LOWEST DEFECT RATE***
Total automation ensures strict quality control during each step of the process at our certified ISO manufacturing facility. *82.56 ppm as per December 2017
- LIGHT AND DURABLE**
Over-engineered to weather low load bearing structures up to 5400 Pa. Light-weight frame exclusively designed with wide-ranging racking compatibility and durability.
- PID RESISTANT**
Proven in accordance to IEC 62804-1
- AVAILABLE IN**
All Black



Electrical Specifications	SILFAB SLA Monocrystalline		
Test Conditions		STC	NOCT
Module Power (Pmax)	Wp	300	227
Maximum power voltage (Vpmax)	V	32.8	29.5
Maximum power current (Ipmax)	A	9.16	7.69
Open circuit voltage (Voc)	V	39.85	36.9
Short circuit current (Isc)	A	9.71	7.96
Module efficiency	%	18.4	17.3
Maximum system voltage (VDC)	V		1000
Series fuse rating	A		20
Power Tolerance	Wp		-0/+5

Measurement conditions: STC 1000 W/m² • AM 1.5 • Temperature 25 °C • NOCT 800 W/m² • AM 1.5 • Measurement uncertainty ≤ 3%
* Sun simulator calibration reference modules from Fraunhofer Institute. Electrical characteristics may vary by ±5% and power by -0/+5.

Temperature Ratings	SILFAB SLA Monocrystalline		
Temperature Coefficient Isc	%/K		0.03
Temperature Coefficient Voc	%/K		-0.30
Temperature Coefficient Pmax	%/K		-0.38
NOCT (± 2°C)	°C		45
Operating temperature	°C		-40/+85

Mechanical Properties and Components	SILFAB SLA Monocrystalline		
Module weight (± 1 kg)	kg		19
Dimensions (H x L x D; ± 1 mm)	mm		1650 x 990 x 38
Maximum surface load (wind/snow)*	N/m ²		5400
Hail impact resistance			Ø 25 mm at 83 km/h
Cells			60 - Si monocrystalline - 4 or 5 busbar - 156.75 x 156.75 mm
Glass			3.2 mm high transmittance, tempered, antireflective coating
Backsheet			Multilayer polyester-based
Frame			Anodized Al
Bypass diodes			3 diodes-45V/12A, IP67/IP68
Cables and connectors (See installation manual)			1200 mm Ø 5.7 mm (4 mm ²), MC4 compatible

Warranties	SILFAB SLA Monocrystalline		
Module product warranty			12 years 25 years
Linear power performance guarantee			≥ 97% end of 1 st year ≥ 90% end of 12 th year ≥ 82% end of 25 th year

Certifications	SILFAB SLA Monocrystalline		
Product			ULC ORD C1703, UL 1703, IEC 61215, IEC 61730, IEC 61701, CEC listed IEC 62716 Ammonia Corrosion, IEC 61701:2011 Salt Mist Corrosion UL Fire Rating: Type 2 (Type 1 on request)
Factory			ISO9001:2015

Warning: Read the installation and User Manual before handling, installing and operating modules.


Third-party generated pan files from Fraunhofer-Institute for Solar Energy Systems ISE are available for download at:
www.silfab.ca/downloads



- Modules Per Pallet: 26
- Pallets Per Truck: 36
- Modules Per Truck: 936



Silfab Solar Inc.
240 Courtneypark Drive East • Mississauga,
Ontario Canada L5T 2S5
Tel +1 905-255-2501 • Fax +1 905-696-0267
info@silfab.ca • www.silfab.ca

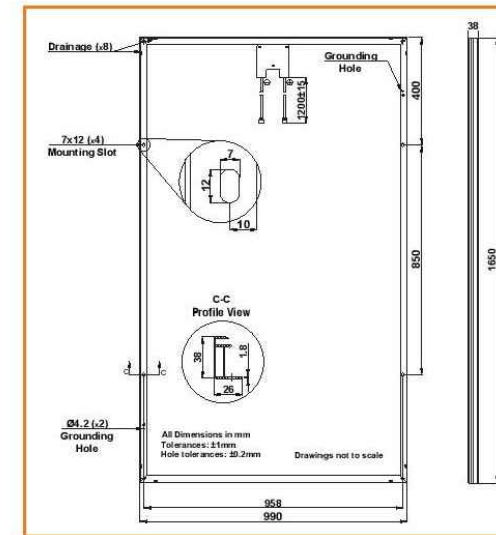

SILFAB-SLA-M-300-SF-02-20180618-K • No reproduction of any kind is allowed. Data and information is subject to modifications without notice. ©Silfab, 2018.



POWER HOME SOLAR, LLC
"POWER YOUR FUTURE"
919 N. MAIN ST.
MOORESVILLE, NC 28115
Phone: 704-800-6591 (OFFICE)
Email: info@powerhome.com
Web: www.powerhome.com

REVISIONS		
DESCRIPTION	DATE	REV

Signature with Seal

DATE: 02/19/2019

PROJECT NAME & ADDRESS

DAVID PRINCE
RESIDENCE
3508 HODGES CHAPEL RD.
DUNN, NC 28334

SHEET NAME
**EQUIPMENT
SPECIFICATION**

SHEET SIZE

**ANSI B
11" X 17"**

SHEET NUMBER

PV-7



Single Phase Inverter with HD-Wave Technology for North America

SE3000H-US / SE3800H-US / SE5000H-US /
SE6000H-US / SE7600H-US / SE10000H-US / SE11400H-US



Optimized installation with HD-Wave technology

- Specifically designed to work with power optimizers
- Record-breaking efficiency
- Fixed voltage inverter for longer strings
- Integrated arc fault protection and rapid shutdown for NEC 2014 and 2017, per article 690.11 and 690.12
- UL1741 SA certified, for CPUC Rule 21 grid compliance
- Extremely small
- High reliability without any electrolytic capacitors
- Built-in module-level monitoring
- Outdoor and indoor installation
- Optional: Revenue grade data, ANSI C12.20 Class 0.5 (0.5% accuracy)



www.solaredge.us

INVERTERS



Single Phase Inverter with HD-Wave Technology for North America

SE3000H-US / SE3800H-US / SE5000H-US /
SE6000H-US / **SE7600H-US** / SE10000H-US / SE11400H-US

	SE3000H-US	SE3800H-US	SE5000H-US	SE6000H-US	SE7600H-US	SE10000H-US	SE11400H-US	
OUTPUT								
Rated AC Power Output	3000	3800 @ 240V	5000	6000 @ 240V	7600	10000	11400	VA
Max. AC Power Output	3000	3800 @ 240V	5000	6000 @ 240V	7600	10000	11400	VA
AC Output Voltage Min.-Nom.-Max. (183 - 208 - 229)	-	✓	-	✓	-	-	-	Vac
AC Output Voltage Min.-Nom.-Max. (211 - 240 - 264)	✓	✓	✓	✓	✓	✓	✓	Vac
AC Frequency (Nominal)					59.3 - 60 - 60.5 ⁽¹⁾			Hz
Maximum Continuous Output Current 208V	-	16	-	24	-	-	-	A
Maximum Continuous Output Current @240V	12.5	16	21	25	32	42	47.5	A
GFDI Threshold					1			A
Utility Monitoring, Islanding Protection, Country Configurable Thresholds					Yes			
INPUT								
Maximum DC Power @240V	4650	5900	7750	9300	11800	15500	17650	W
Maximum DC Power @208V	-	5100	-	7750	-	-	-	W
Transformer-less, Ungrounded					Yes			
Maximum Input Voltage					480			Vdc
Nominal DC Input Voltage					380	400		Vdc
Maximum Input Current 208V					13.5			A
Maximum Input Current @240V	8.5	10.5	13.5	16.5	20	27	30.5	Adc
Max. Input Short Circuit Current					45			Adc
Reverse-Polarity Protection					Yes			
Ground-Fault Isolation Detection					600µs Sensitivity			
Maximum Inverter Efficiency	99				99.2			%
CEC Weighted Efficiency					99			%
Nighttime Power Consumption					< 2.5			W
ADDITIONAL FEATURES								
Supported Communication Interfaces					RS485, Ethernet, ZigBee (optional), Cellular (optional)			
Revenue Grade Data, ANSI C12.20					Optional ⁽²⁾			
Rapid Shutdown - NEC 2014 and 2017 690.12					Automatic Rapid Shutdown upon AC Grid Disconnect			
STANDARD COMPLIANCE								
Safety					UL1741, UL1741 SA, UL1699B, CSA C22.2, Canadian AFCI according to T.I.L. M-07			
Grid Connection Standards					IEEE1547, Rule 21, Rule 14 (H)			
Emissions					FCC Part 15 Class B			
INSTALLATION SPECIFICATIONS								
AC Output Conduit Size / AWG Range					3/4" minimum / 14-6 AWG	3/4" minimum / 14-4 AWG		
DC Input Conduit Size / # of Strings / AWG Range					3/4" minimum / 1-2 strings / 14-6 AWG	3/4" minimum / 1-3 strings / 14-6 AWG		
Dimensions with Safety Switch (HxWxD)					17.7 x 14.6 x 6.8 / 450 x 370 x 174	21.3 x 14.6 x 7.3 / 540 x 370		in / mm
Weight with Safety Switch	22 / 10	25.1 / 11.4		26.2 / 11.9		38.8 / 17.6		lb / kg
Noise					< 25	< 50		dBA
Cooling					Natural Convection	Natural convection		
Operating Temperature Range					-13 to +140 / -25 to +60 ⁽³⁾ (-40°F / -40°C option ⁽⁴⁾)			°F / °C
Protection Rating					NEMA 3R (Inverter with Safety Switch)			

⁽¹⁾ For other regional settings please contact SolarEdge support

⁽²⁾ Revenue grade inverter P/N: SExxxxH-US000NNC2

⁽³⁾ For power de-rating information refer to: <https://www.solaredge.com/sites/default/files/se-temperature-derating-note-na.pdf>

⁽⁴⁾ -40 version P/N: SExxxxH-US000NNU4



© SolarEdge Technologies, Inc. All rights reserved. SOLAREEDGE, the SolarEdge logo, OPTIMIZED BY SOLAREEDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: 07/2018/V01/ENG NAM. Subject to change without notice.



POWER HOME SOLAR, LLC
"POWER YOUR FUTURE"
919 N. MAIN ST.
MOORESVILLE, NC 28115
Phone: 704-800-6591 (OFFICE)
Email: info@powerhome.com
Web: www.powerhome.com

REVISIONS

DESCRIPTION	DATE	REV

Signature with Seal

DATE: 02/19/2019

PROJECT NAME & ADDRESS

DAVID PRINCE
RESIDENCE
3508 HODGES CHAPEL RD.
DUNN, NC 28334

SHEET NAME

EQUIPMENT
SPECIFICATION

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-8



Power Optimizer

P320 P370 / P400 / P405 / P505



POWER OPTIMIZER

PV power optimization at the module-level

- Specifically designed to work with SolarEdge inverters
- Up to 25% more energy
- Superior efficiency (99.5%)
- Mitigates all types of module mismatch losses, from manufacturing tolerance to partial shading
- Flexible system design for maximum space utilization
- Fast installation with a single bolt
- Next generation maintenance with module-level monitoring
- Compliant with arc fault protection and rapid shutdown NEC requirements (when installed as part of the SolarEdge system)
- Module-level voltage shutdown for installer and firefighter safety

www.solaredge.us



Power Optimizer

P320 P370 / P400 / P405 / P505

OPTIMIZER MODEL (typical module compatibility)	P320 (for high-power 60-cell modules)	P370 (for higher-power 60 and 72-cell modules)	P400 (for 72 & 96-cell modules)	P405 (for thin film modules)	P505 (for higher current modules)	
INPUT						
Rated Input DC Power ⁽¹⁾	320	370	400	405	505	W
Absolute Maximum Input Voltage (Voc at lowest temperature)	48	60	80	125	83	Vdc
MPPT Operating Range	8 - 48	8 - 60	8 - 80	12.5 - 105	12.5 - 83	Vdc
Maximum Short Circuit Current (Isc)	11			10.1	14	Adc
Maximum DC Input Current	13.75			12.63	17.5	Adc
Maximum Efficiency				99.5		%
Weighted Efficiency			98.8		98.6	%
Overvoltage Category	II					
OUTPUT DURING OPERATION (POWER OPTIMIZER CONNECTED TO OPERATING SOLAREGE INVERTER)						
Maximum Output Current	15					Adc
Maximum Output Voltage	60			85		Vdc
OUTPUT DURING STANDBY (POWER OPTIMIZER DISCONNECTED FROM SOLAREGE INVERTER OR SOLAREGE INVERTER OFF)						
Safety Output Voltage per Power Optimizer	1 ± 0.1					Vdc
STANDARD COMPLIANCE						
EMC	FCC Part15 Class B, IEC61000-6-2, IEC61000-6-3					
Safety	IEC62109-1 (class II safety), UL1741					
RoHS	Yes					
INSTALLATION SPECIFICATIONS						
Maximum Allowed System Voltage	1000					Vdc
Compatible inverters	All SolarEdge Single Phase and Three Phase inverters					
Dimensions (W x L x H)	128 x 152 x 28 / 5 x 5.97 x 1.1	128 x 152 x 36 / 5 x 5.97 x 1.42	128 x 152 x 50 / 5 x 5.97 x 1.96	128 x 152 x 59 / 5 x 5.97 x 2.32		mm / in
Weight (including cables)	630 / 1.4	750 / 1.7	845 / 1.9	1064 / 2.3		gr. / lb
Input Connector	MC4 ⁽²⁾					
Output Wire Type / Connector	Double Insulated; MC4					
Output Wire Length	0.95 / 3.0		1.2 / 3.9			m / ft
Operating Temperature Range	-40 - +85 / -40 - +185					°C / °F
Protection Rating	IP68 / NEMA6P					
Relative Humidity	0 - 100					%

⁽¹⁾ Rated STC power of the module. Module of up to +5% power tolerance allowed.

⁽²⁾ For other connector types please contact SolarEdge.

PV SYSTEM DESIGN USING A SOLAREGE INVERTER ⁽³⁾⁽⁴⁾	SINGLE PHASE HD-WAVE				
	P320, P370, P400 P405 / P505	SINGLE PHASE	THREE PHASE 208V	THREE PHASE 480V	
Minimum String Length (Power Optimizers)	8	10	18		
Maximum String Length (Power Optimizers)	6	8	14		
Maximum String Length (Power Optimizers)	25	25	50 ⁽⁵⁾		
Maximum Power per String	5700 (6000 with SE7600-US - SE11400- US)	5250	6000	12750	W
Parallel Strings of Different Lengths or Orientations	Yes				

⁽³⁾ For detailed string sizing information refer to: http://www.solaredge.com/sites/default/files/string_sizing_na.pdf.

⁽⁴⁾ It is not allowed to mix P405/P505 with P320/P370/P400/P600/P700/P800 in one string.

⁽⁵⁾ A string with more than 30 optimizers does not meet NEC rapid shutdown requirements; safety voltage will be above the 30V requirement.



© SolarEdge Technologies, Inc. All rights reserved. SOLAREGE, the SolarEdge logo, OPTIMIZED BY SOLAREGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: 07/2018/VO1/ENG NAM. Subject to change without notice.



POWER HOME SOLAR, LLC
"POWER YOUR FUTURE"
919 N. MAIN ST.
MOORESVILLE, NC 28115
Phone: 704-800-6591 (OFFICE)
Email: info@powerhome.com
Web: www.powerhome.com

REVISIONS

DESCRIPTION	DATE	REV

Signature with Seal

DATE: 02/19/2019

PROJECT NAME & ADDRESS

DAVID PRINCE
RESIDENCE
3508 HODGES CHAPEL RD.
DUNN, NC 28334

SHEET NAME
EQUIPMENT
SPECIFICATION

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-9

S-5!®

The Right Way

The right way to attach almost anything to metal roofs!

ProteaBracket™

ProteaBracket™ is the most versatile attachment solution on the market, fitting most metal trapezoidal and "continuous" tile sheet profiles with and without intermediate insulation. It features an adjustable attachment base and multiple solar module attachment options (illustrated on back) to accommodate varying widths and heights. There are no messy sealants to apply and no chance for leaks; the ProteaBracket comes with factory-applied, adhesive rubber sealant to ensure quick installation and a weather-proof fit.

The ProteaBracket is mounted directly onto the crown of the panel, straddling the profile. No surface preparation is necessary; simply wipe away excess oil and debris, align, and apply. Secure ProteaBracket through all 4 pre-punched holes.


ProteaBracket is the perfect match for the S-5-PV Kit, for a solar attachment solution that is both economical and easy to use.

S-5!® ProteaBracket™ is a versatile bracket that adjusts easily to most trapezoidal roof profiles.

S-5! PV kits have an M8 bolt and are suitable for use with all S-5! clamps except

- Standard size K-Grip

The above uses M10 bolts for heavier duty applications, and is suitable for use with rail-mounted PV systems.

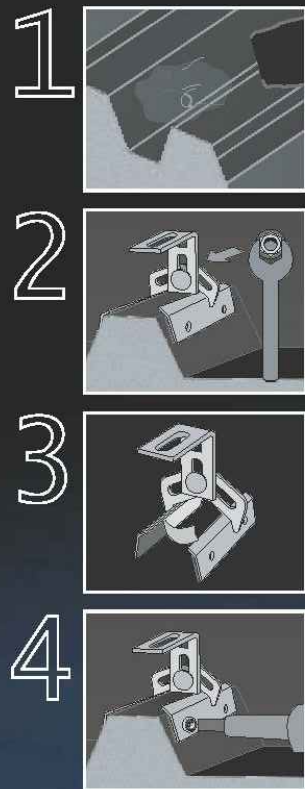

ProteaBracket™



S-5!®

The Right Way

ProteaBracket™ is the perfect solar attachment solution for most trapezoidal exposed-fastened metal roof profiles. No messy sealants to apply: the factory-applied adhesive rubber sealant weather-proofs and makes installation easy.

S-5!® holding strength is unmatched in the industry.

Each ProteaBracket™ comes with a factory-applied, adhesive rubber sealant on the base. A structural A2 stainless steel bimetal attachment bracket, ProteaBracket is compatible with most common metal roofing materials.

All four pre-punched holes must be used to achieve tested strength. For design assistance, contact Safintra South Africa (and see our website www.safintra.co.za), or visit www.S-5.com for the independent lab test data that can be used for load-critical designs and applications. Also, please visit S-5! website for more information including metallurgical compatibilities and specifications.

Multiple Attachment Options:


ProteaBracket™ with Top Rail option for PV attachment



ProteaBracket™ with S-5-PV Kit option (if not using a rail)



ProteaBracket™

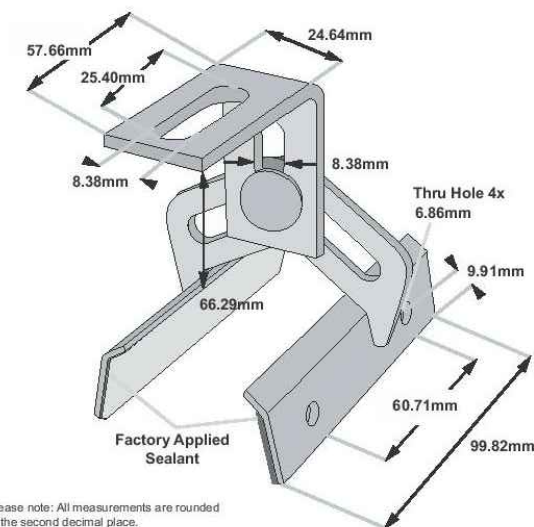

Please note: All measurements are rounded to the second decimal place.



S-5!® Warning! Please use this product responsibly!

Products are protected by multiple international patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5! website at www.S-5.com.

Copyright 2013, Metal Roof Innovations, Ltd. S-5! products are patent protected. S-9 Aggressively protects its patents, trademarks and copyrights.

Published April 2014

Sole Agents for Africa:



www.safintra.co.za / www.safintra.com



POWER HOME SOLAR, LLC
"POWER YOUR FUTURE"
919 N. MAIN ST.
MOORESVILLE, NC 28115
Phone: 704-800-6591 (OFFICE)
Email: info@powerhome.com
Web: www.powerhome.com

REVISIONS

DESCRIPTION	DATE	REV

Signature with Seal

DATE: 02/19/2019

PROJECT NAME & ADDRESS

DAVID PRINCE
RESIDENCE
3508 HODGES CHAPEL RD.
DUNN, NC 28334

SHEET NAME
EQUIPMENT
SPECIFICATION

SHEET SIZE
ANSI B
11" X 17"

SHEET NUMBER
PV-10




Tech Brief

XR Rail Family

Solar Is Not Always Sunny

Over their lifetime, solar panels experience countless extreme weather events. Not just the worst storms in years, but the worst storms in 40 years. High winds capable of ripping panels from a roof, and snowfalls weighing enough to buckle a panel frame.

XR Rails are the structural backbone preventing these results. They resist uplift, protect against buckling and safely and efficiently transfer loads into the building structure. Their superior spanning capability requires fewer roof attachments, reducing the number of roof penetrations and the amount of installation time.

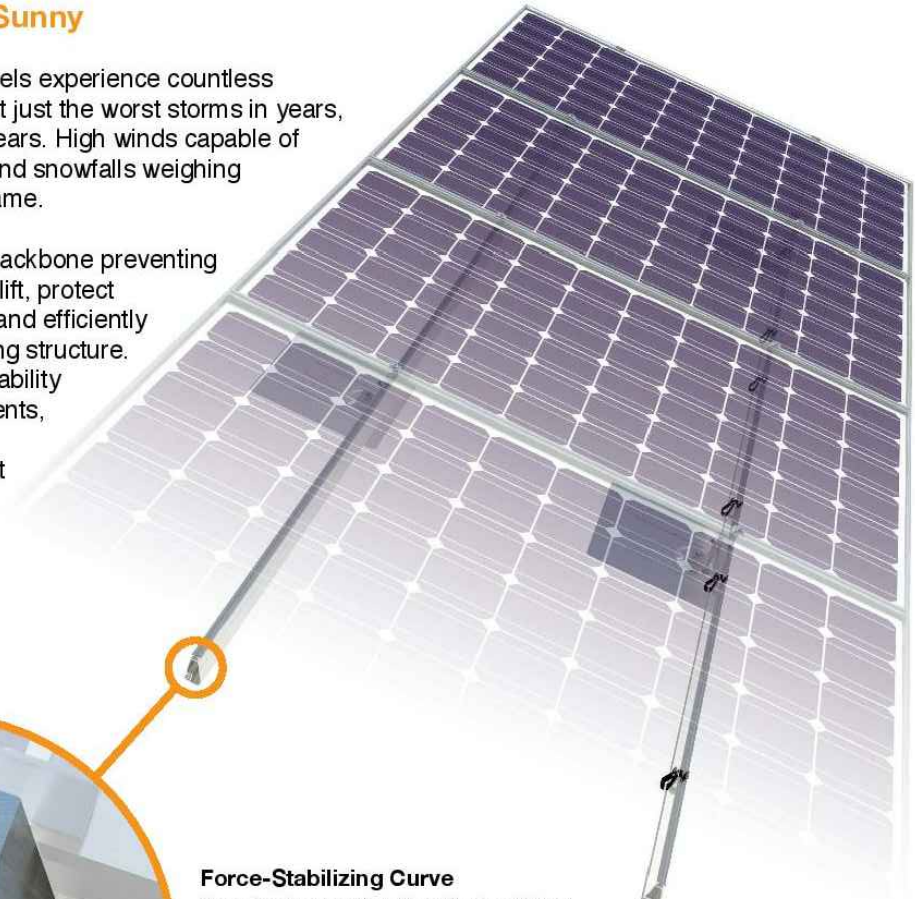

Force-Stabilizing Curve

Sloped roofs generate both vertical and lateral forces on mounting rails which can cause them to bend and twist. The curved shape of XR Rails is specially designed to increase strength in both directions while resisting the twisting. This unique feature ensures greater security during extreme weather and a longer system lifetime.

Compatible with Flat & Pitched Roofs



XR Rails are compatible with FlashFoot and other pitched roof attachments.



IronRidge offers a range of tilt leg options for flat roof mounting applications.

Corrosion-Resistant Materials

All XR Rails are made of marine-grade aluminum alloy, then protected with an anodized finish. Anodizing prevents surface and structural corrosion, while also providing a more attractive appearance.



Tech Brief

XR Rail Family

The XR Rail Family offers the strength of a curved rail in three targeted sizes. Each size supports specific design loads, while minimizing material costs. Depending on your location, there is an XR Rail to match.



XR10

XR10 is a sleek, low-profile mounting rail, designed for regions with light or no snow. It achieves 6 foot spans, while remaining light and economical.

- 6' spanning capability
- Moderate load capability
- Clear anodized finish
- Internal splices available



XR100

XR100 is the ultimate residential mounting rail. It supports a range of wind and snow conditions, while also maximizing spans up to 8 feet.

- 8' spanning capability
- Heavy load capability
- Clear & black anodized finish
- Internal splices available



XR1000

XR1000 is a heavyweight among solar mounting rails. It's built to handle extreme climates and spans 12 feet or more for commercial applications.

- 12' spanning capability
- Extreme load capability
- Clear anodized finish
- Internal splices available

Rail Selection

The following table was prepared in compliance with applicable engineering codes and standards. Values are based on the following criteria: ASCE 7-10, Roof Zone 1, Exposure B, Roof Slope of 7 to 27 degrees and Mean Building Height of 30 ft. Visit IronRidge.com for detailed span tables and certifications.

Load		Rail Span					
Snow (PSF)	Wind (MPH)	4'	5' 4"	6'	8'	10'	12'
None	100	XR10		XR100		XR1000	
	120						
	140						
	160						
10-20	100			XR100		XR1000	
	120						
	140						
	160						
30	100			XR100		XR1000	
	160						
40	100			XR100		XR1000	
	160						
50-70	160						
80-90	160						



REVISIONS

DESCRIPTION	DATE	REV

Signature with Seal

DATE: 02/19/2019

PROJECT NAME & ADDRESS

DAVID PRINCE
RESIDENCE
3508 HODGES CHAPEL RD.
DUNN, NC 28334

SHEET NAME

EQUIPMENT
SPECIFICATION

SHEET SIZE

ANSI B
11" X 17"

SHEET NUMBER

PV-11



UFO Family of Components

Tech Brief

Simplified Grounding for Every Application


The UFO family of components eliminates the need for separate grounding hardware by bonding solar modules directly to IronRidge XR Rails. All system types that feature the UFO family—Flush Mount, Tilt Mount and Ground Mount—are fully listed to the UL 2703 standard.

UFO hardware forms secure electrical bonds with both the module and the rail, resulting in many parallel grounding paths throughout the system. This leads to safer and more reliable installations.



Stopper Sleeve

The Stopper Sleeve snaps onto the UFO, converting it into a bonded end clamp.

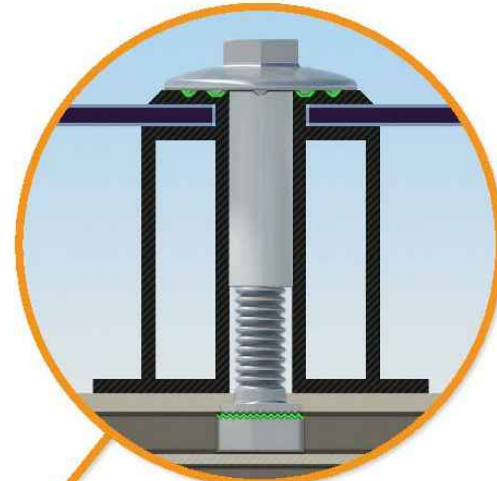

Universal Fastening Object (UFO)

The UFO securely bonds solar modules to XR Rails. It comes assembled and lubricated, and can fit a wide range of module heights.



Bonded Splice

Each Bonded Splice uses self-drilling screws to form a secure connection. No bonding strap needed.



Grounding Lug


A single Grounding Lug connects an entire row of PV modules to the grounding conductor.



Bonded Attachments

The bonding bolt attaches and bonds the L-foot to the rail. It is installed with the same socket as the rest of the system.

System Diagram

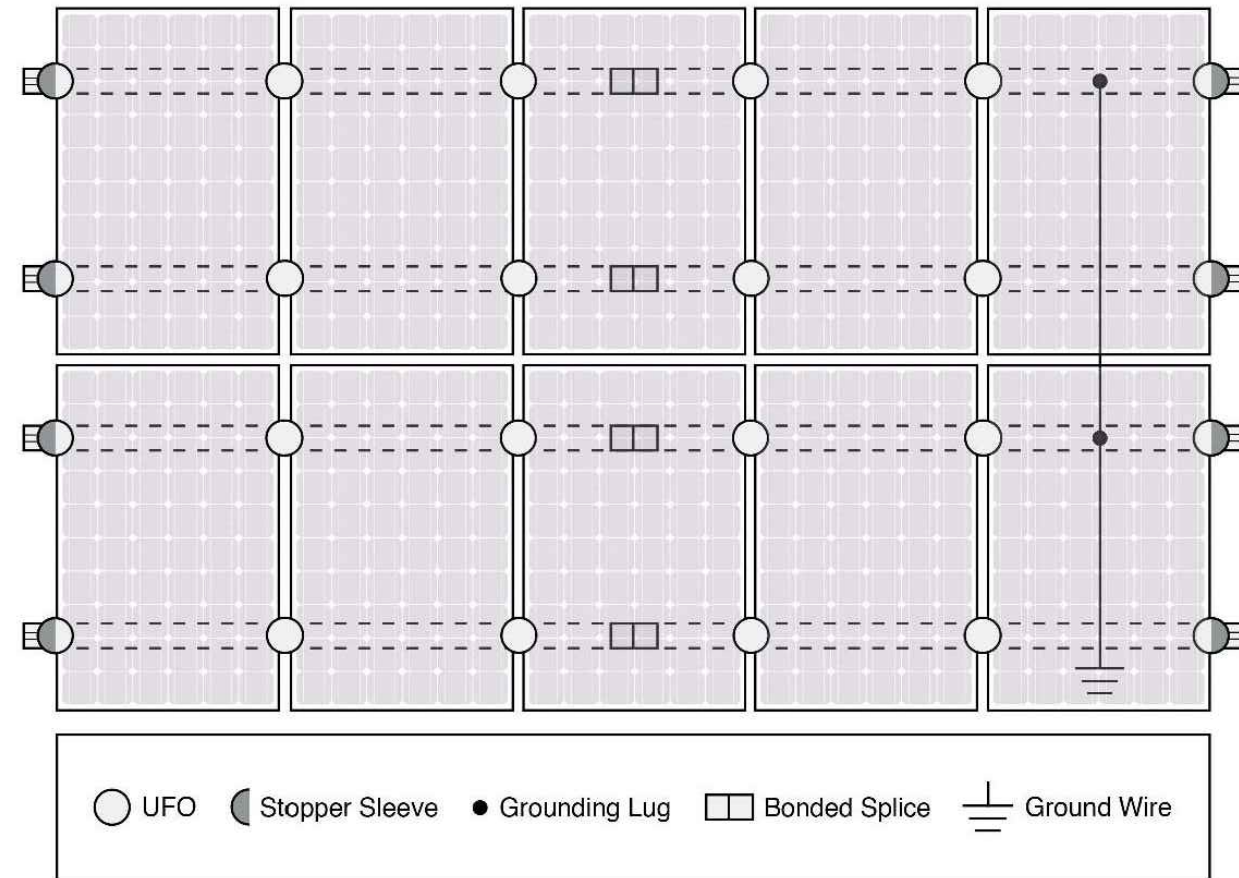

Approved Enphase microinverters can provide equipment grounding of IronRidge systems, eliminating the need for grounding lugs and field installed equipment ground conductors (EGC). A minimum of two microinverters mounted to the same rail and connected to the same Engage cable is required. Refer to installation manuals for additional details.

UL Certification

The IronRidge Flush Mount, Tilt Mount, and Ground Mount Systems have been listed to UL 2703 by Intertek Group plc.

UL 2703 is the standard for evaluating solar mounting systems. It ensures these devices will maintain strong electrical and mechanical connections over an extended period of time in extreme outdoor environments.

[Go to IronRidge.com/UFO](http://www.ironridge.com/UFO)

Feature	Cross-System Compatibility		
	Flush Mount	Tilt Mount	Ground Mount
XR Rails	✓	✓	XR1000 Only
UFO/Stopper	✓	✓	✓
Bonded Splice	✓	✓	N/A
Grounding Lugs	1 per Row	1 per Row	1 per Array
Microinverters & Power Optimizers	Enphase - M250-72, M250-60, M215-60, C250-72 Darfon - MIG240, MIG300, G320, G640 SolarEdge - P300, P320, P400, P405, P600, P700, P730		
Fire Rating	Class A	Class A	N/A
Modules	Tested or Evaluated with over 400 Framed Modules Refer to installation manuals for a detailed list.		

Tech Brief



REVISIONS		
DESCRIPTION	DATE	REV

Signature with Seal

DATE: 02/19/2019

PROJECT NAME & ADDRESS

DAVID PRINCE
RESIDENCE
3508 HODGES CHAPEL RD.
DUNN, NC 28334

SHEET NAME
EQUIPMENT
SPECIFICATION

SHEET SIZE
ANSI B
11" X 17"

SHEET NUMBER
PV-12