

PROJECT DETAILS	
PV Modules	36 x Solaria PowerXT-360R-PD
Optimizers	36 x P370
Inverter	1 x SE11400H-US (Built in Cons. Meter)
Roof Type	Shingles
Racking	IronRidge XR10
Mounting Type	FlashFoot 2
DC SIZE	12.96 kW
AC SIZE	11.4 kVA

DRAWING INDEX			
Item	Drawing #	Rev	Description
1	2082JR00-0	A	Drawing Index
2	2082JR00-1	A	Site Layout
3	2082JR00-2	A	String Mapping
4	2082JR00-3	A	Electrical One Line Diagram
5	2082JR00-4	A	Detailed Electrical Wiring Schematic
6	2082JR00-5	A	PV Labels
7	2082JR00-6	A	Bill of Materials



101 Woodwinds Industrial Ct, Ste O
 Cary, NC 27511
 O: 919.948.6474
 E: info@8msolar.com

Jason Roseberry
 95 Peachtree lane
 Sanford, NC 27332

NOTICE TO CONTRACTOR
 All construction must comply with current NC Building Codes and is subject to field inspection and verification.

APPROVED
 Limited building only review
 Permit holder responsible for full compliance with the code.

07/01/2020




TOP VIEW OF BUILDING



FRONT VIEW OF BUILDING



DRAWING INDEX
 SCALE: NTS



1	A	06/22/2020

JOB NUMBER
 20-82-JR00

DATE ISSUED
 06/22/2020

PROJECT STATUS
 PERMITTING

SHEET
DRAWING INDEX

JR
 2082JR00-0

PV System Dead Load
(Panel + Racking weight) / PV System Area
 (36 modules x 46 lbs./panel + 302 ft. of racking x 1.15 lb.ft) / (36 panels x 63.8" x 44") = 2.85 psf


The roof is located in 115mph wind zone

There is one layer of shingles
 Roofing material is asphalt shingles

Utility
 Meter



Module
 Dimension



Roofs	Pitch	Azimuth
A	26°	343°
B	26°	163°
C&D	26°	73°

101 Woodwinds Industrial Ct, Ste O
 Cary, NC 27511
 O: 919.948.6474
 E: info@8msolar.com

SYSTEM DETAILS

NUMBER OF PANELS : 36
 PANELS MODEL : Solaria PowerXT-360R-PD
 DC SIZE : 12.96 kW
 AC SIZE : 11.4 kVA

Jason Roseberry
 95 Peachtree lane
 Sanford, NC 27332




1	A	06/22/2020

JOB NUMBER: 20-82-JR00
 DATE ISSUED: 06/22/2020
 PROJECT STATUS: PERMITTING





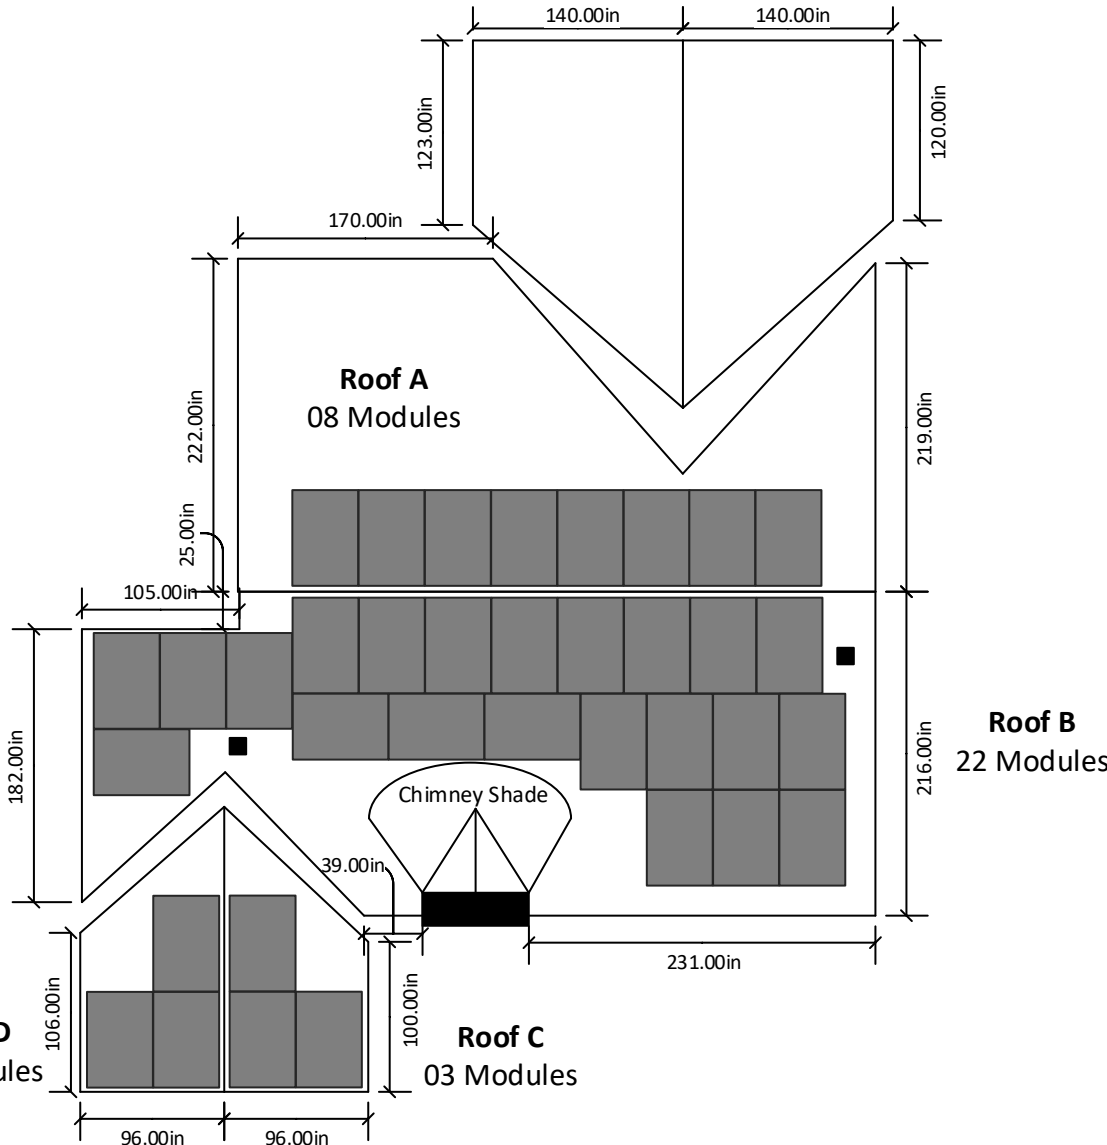

SHEET
SITE LAYOUT

JR
 2082JR00-1




SITE LAYOUT
 SCALE: 3/32" - 1' 0"



String Layout					
Strings #	No. of Modules	Color Code	Strings #	No. of Modules	Color Code
String A	14				
String B	14				
String C	8				

Utility Meter



Module Dimension		
	Roofs	Pitch
A	26°	343°
B	26°	163°
C&D	26°	73°




8MSOLAR
ADVANCING ENERGY INDEPENDENCE
101 Woodwinds Industrial Ct, Ste O
Cary, NC 27511
O: 919.948.6474
E: info@8msolar.com

SYSTEM DETAILS

NUMBER OF PANELS : 36
PANELS MODEL : Solaria PowerXT-360R-PD
DC SIZE : 12.96 kW
AC SIZE : 11.4 kVA

Jason Roseberry
95 Peachtree lane
Sanford, NC 27332

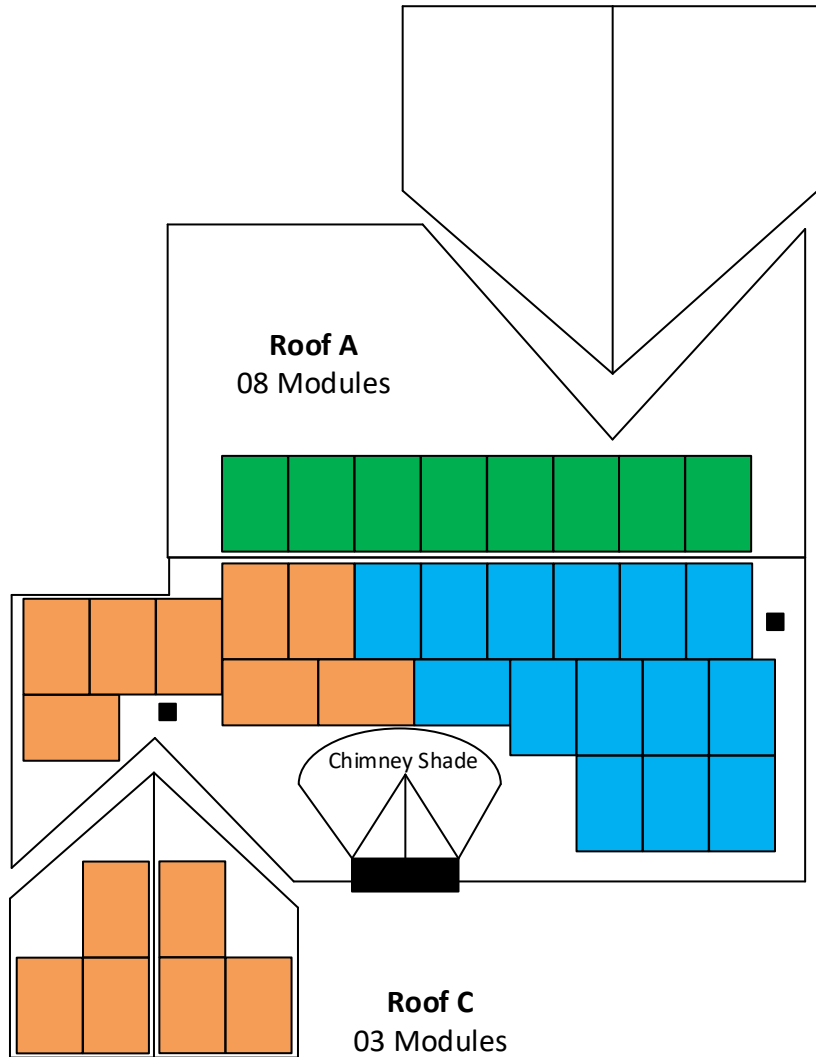

Roof B
22 Modules

Roof D
03 Modules

Roof C
03 Modules

STRING MAPPING

SCALE: 3/32" - 1' 0"



1	A	06/22/2020

JOB NUMBER: 20-82-JR00
DATE ISSUED: 06/22/2020
PROJECT STATUS: PERMITTING

SHEET: STRING MAPPING

JR
2082JR00-2

Jason Roseberry
95 Peachtree lane
Sanford, NC 27332




1	A	06/22/2020

JOB NUMBER: 20-82-JR00
DATE ISSUED: 06/22/2020
PROJECT STATUS: PERMITTING

SHEET
**ELECTRICAL ONE LINE
DIAGRAM**

JR
2082JR00-3


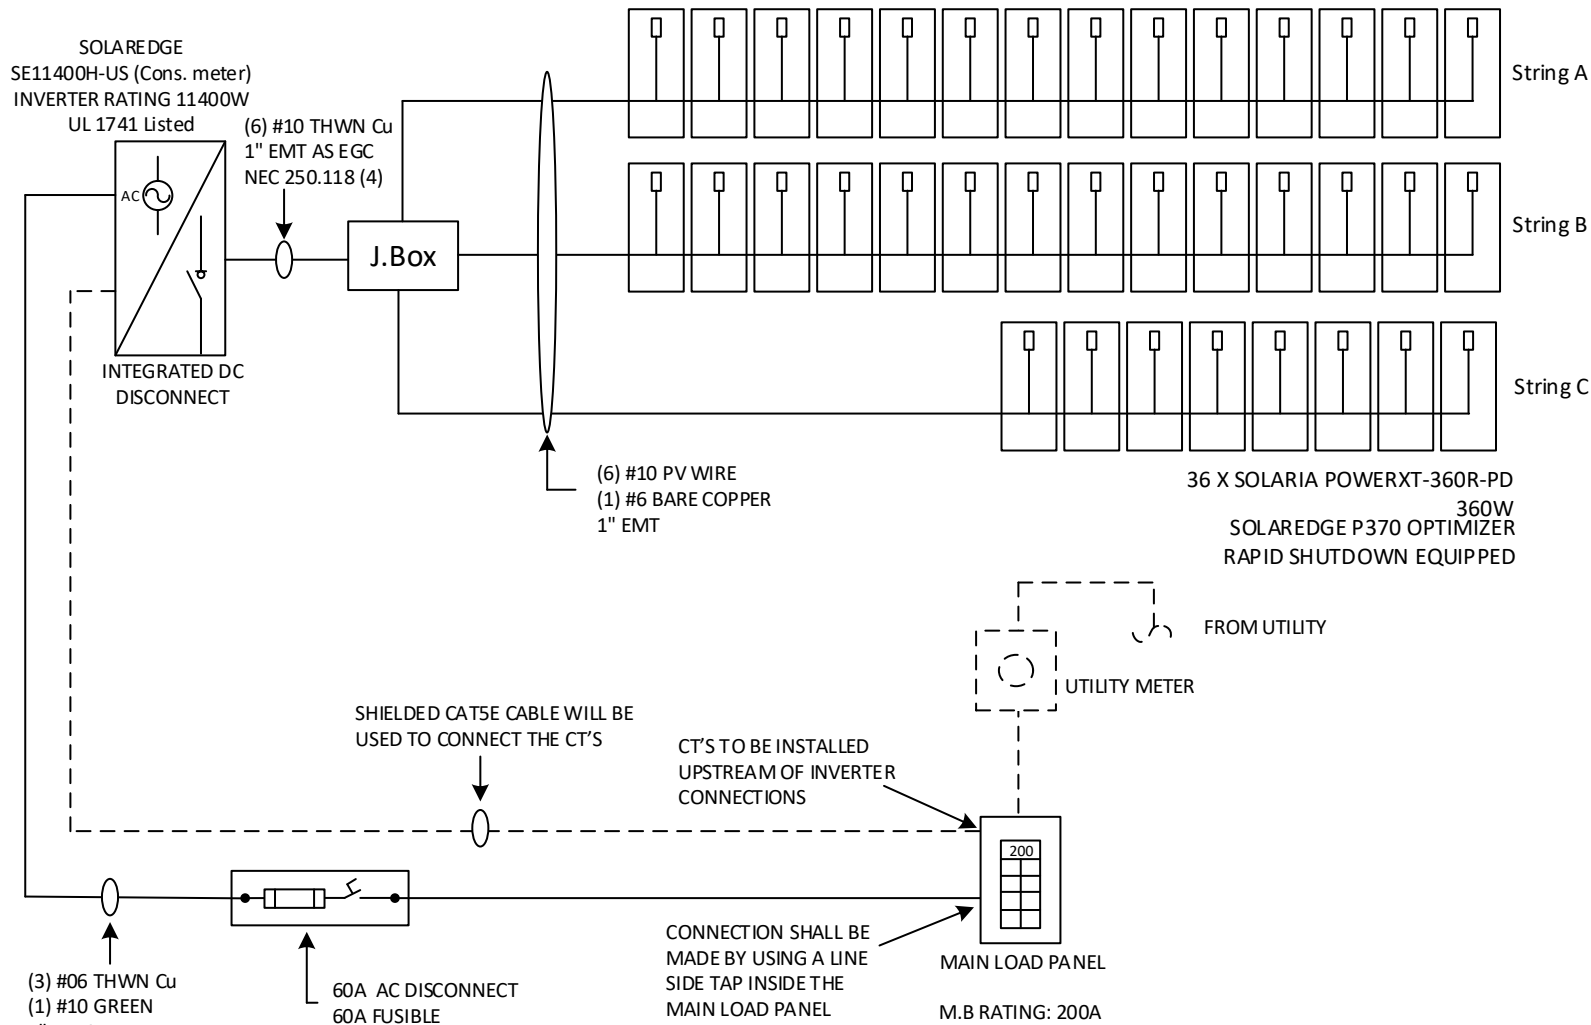


ELECTRICAL NOTES

<ul style="list-style-type: none"> System Size: 12,960 W DC (36) Solaria PowerXT-360R-PD 360W (36) SOLAREGE P370 OPTIMIZERS (01) SOLAREGE SE11400H-US (Includes Consumption Monitoring Inverter) Inverter Output: 47.5A max @ 240 VAC 11.4 kVA AC output max 	<p>STRING A: 14 X 360W = 5,040W ea</p> <p>I_{mpp} = 12.6 Adc I_{max} = 23.4 Adc V_{mpp} = 400 Vdc V_{oc} = 14 Vdc</p>	<p>STRING B: 14 X 360W = 5,040W ea</p> <p>I_{mpp} = 12.6 Adc I_{max} = 23.4 Adc V_{mpp} = 400 Vdc V_{oc} = 14 Vdc</p>	<p>STRING C: 08 X 360W = 2,880W ea</p> <p>I_{mpp} = 7.2 Adc I_{max} = 23.4 Adc V_{mpp} = 400 Vdc V_{oc} = 08 Vdc</p>
--	---	---	--

EGC – EQUIPMENT GROUNDING CONDUCTOR
EMT IS GROUND, NO SEPARATE WIRE NEEDED AS GROUNDING CONDUCTOR

- Grounding will be done via IronRidge grounding mid-clamps and WEEB bonding jumpers to ensure the rail and panels are continuously grounded.
- Rapid Shutdown is included in the Inverter, refer to inverter & optimizer attached datasheets.
- The load center / disconnect will be visible, lockable accessible to utility linesmen and will be properly labelled as per NEC requirements. It will be located on the exterior wall of the building, next to the utility meter.

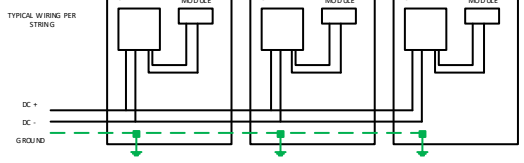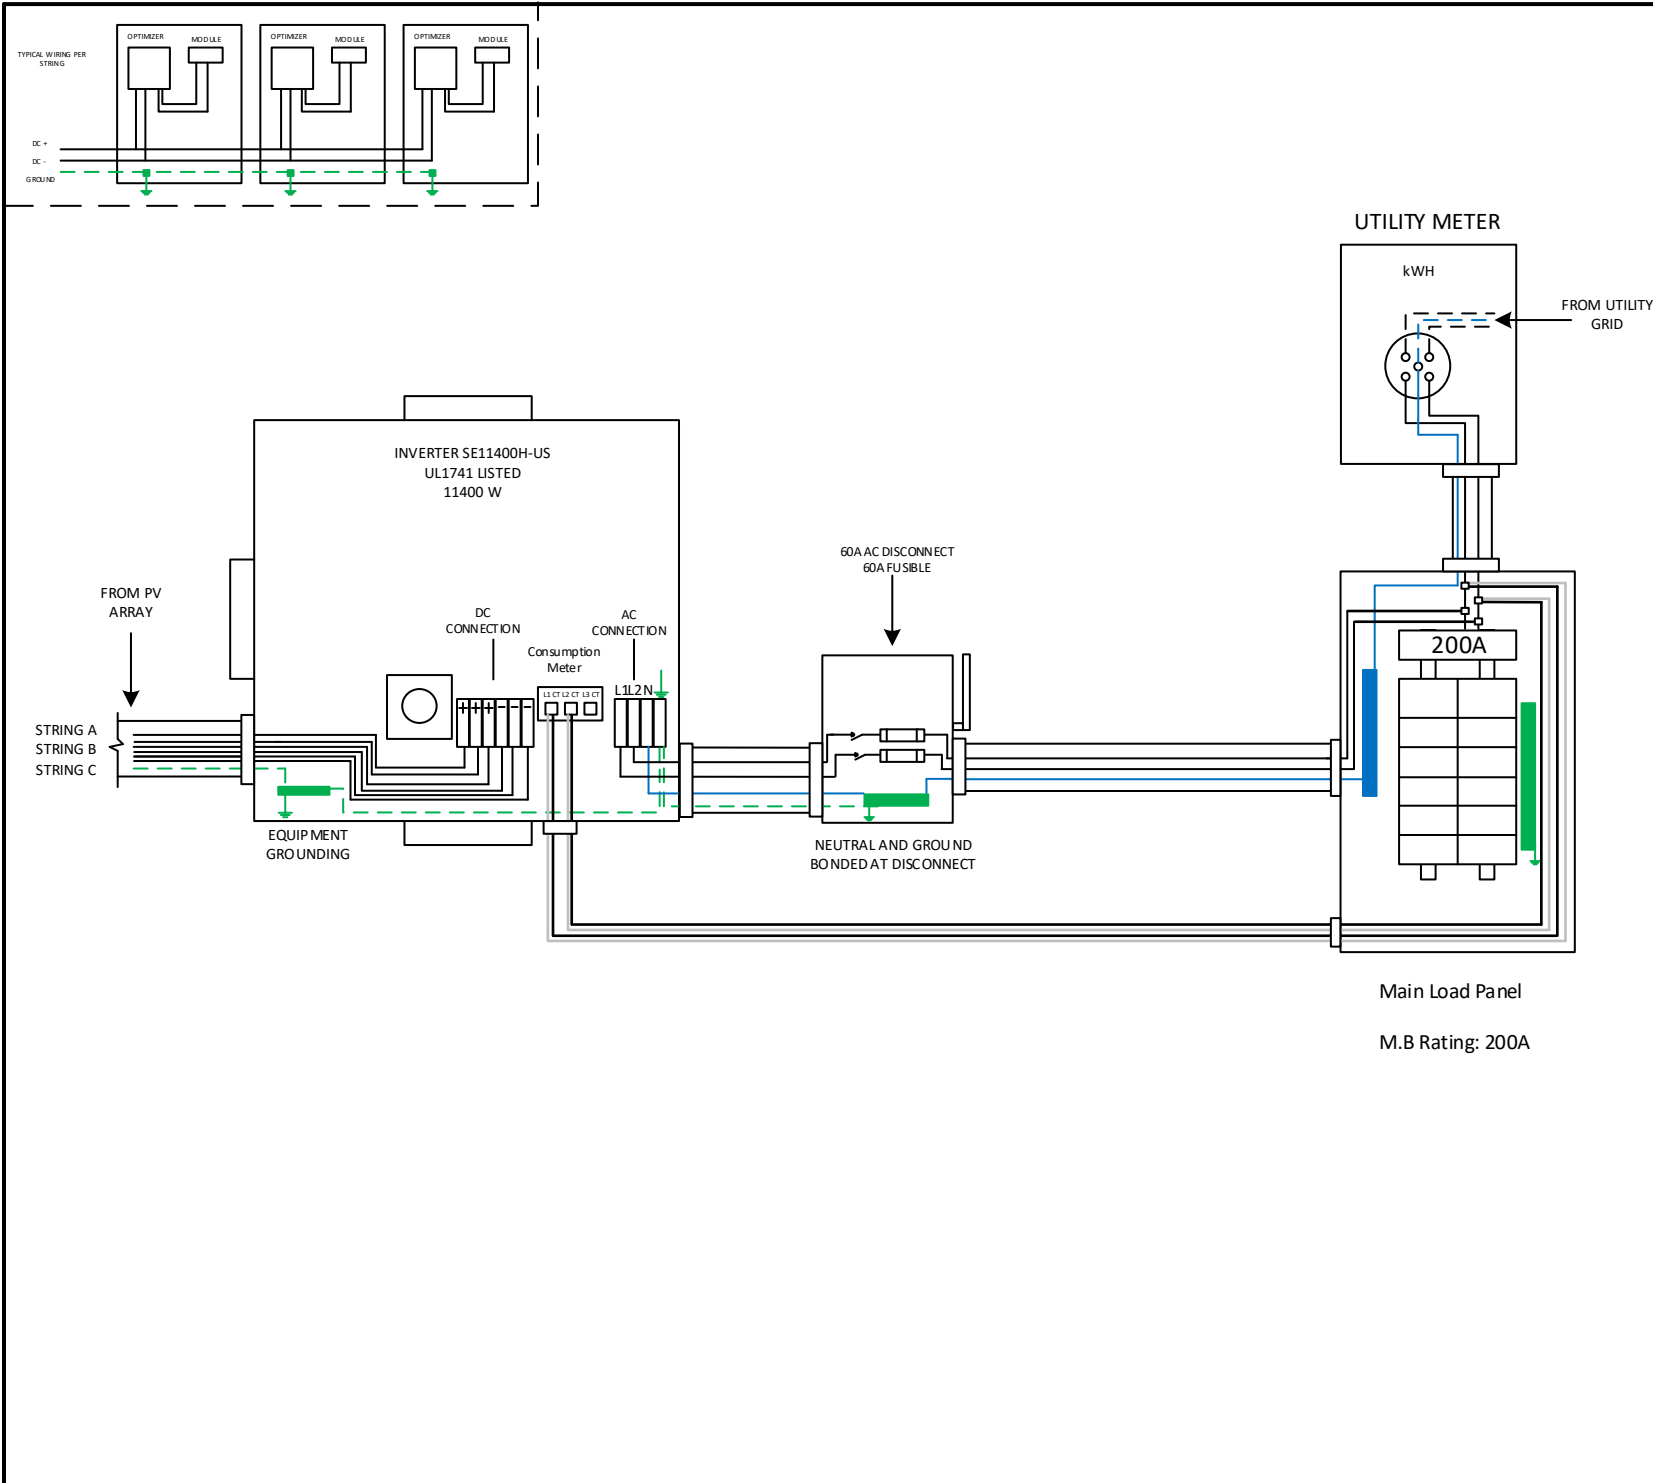

101 Woodwinds Industrial Ct, Ste O
Cary, NC 27511
O: 919.948.6474
E: info@8msolar.co.com

Jason Roseberry
95 Peachtree lane
Sanford, NC 27332




1	A	06/22/2020

JOB NUMBER: 20-82-JR00
DATE ISSUED: 06/22/2020
PROJECT STATUS: PERMITTING

SHEET: DETAILED ELECTRICAL WIRING SCHEMATIC

JR
2082JR00-4

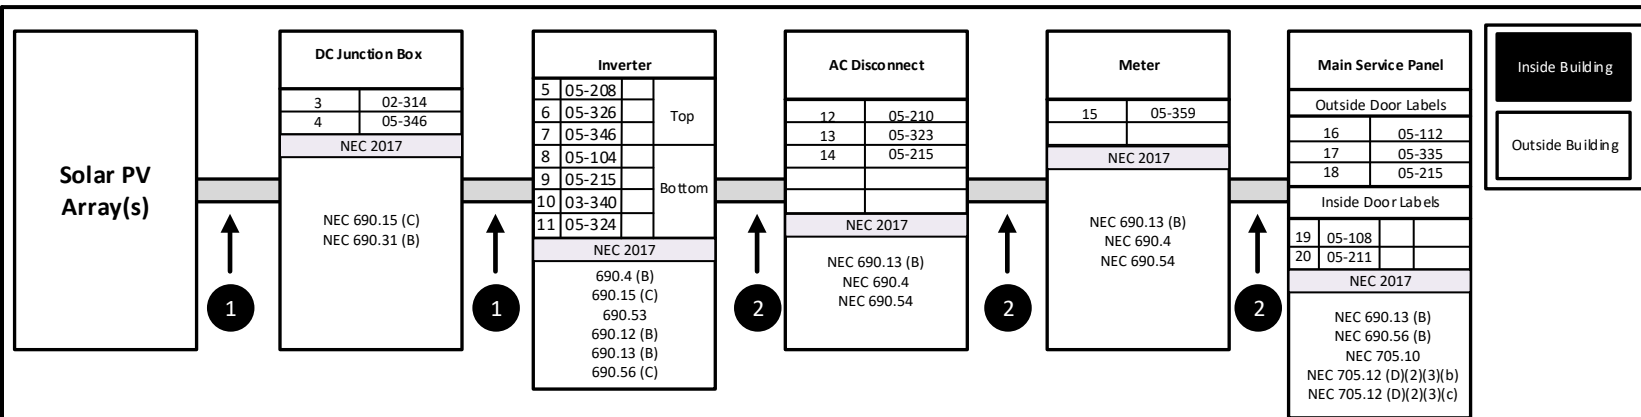

Jason Roseberry
 95 Peachtree lane
 Sanford, NC 27332




CONDUIT AND RACEWAYS LABELS			INVERTER		AC DISCONNECT		MAIN SERVICE PANEL			
1	02-314		5	05-208		12	05-210	16	05-112	
2	05-329		6	05-326		13	05-323	17	05-335	
DC JUNCTION BOXES			7	05-346		14	05-215	18	05-215	
3	02-314		8	05-104		Meter		19	05-108	
4	05-346		9	05-215		15	05-359	20	05-211	
			10	03-340						
			11	05-324						

1	A	06/22/2020

JOB NUMBER 20-82-JR00
 DATE ISSUED 06/22/2020
 PROJECT STATUS PERMITTING


SHEET
PV LABELS

Rails and Splices : XR10	Roof Attachment : FlashFoot2
There is one layer of shingles Roofing material is asphalt shingles	The roof is located in 115mph wind zone
Attachment Span: 4ft	

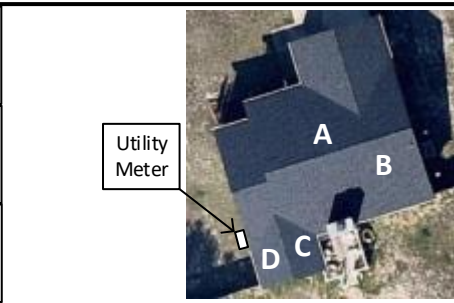

Module Dimension		
	Roofs	Pitch
A	26°	343°
B	26°	163°
C&D	26°	73°

Jason Roseberry
95 Peachtree lane
Sanford, NC 27332

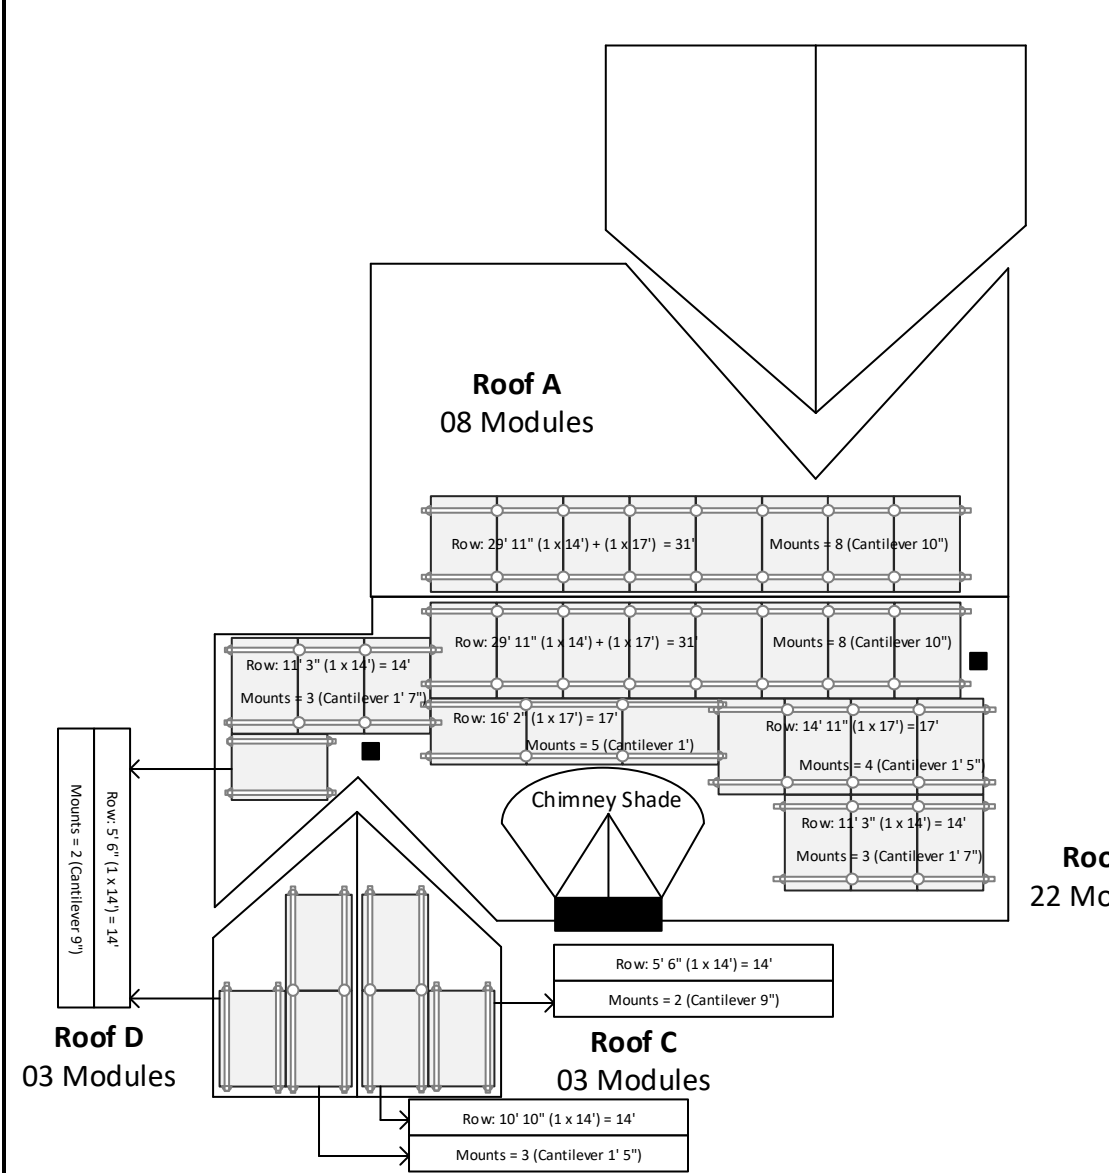


- RAILS AND SPLICES**
- 08 x XR-10-204B: XR10, Rail 204" (17 Feet) Black
 - 15 x XR-10-168B: XR10, Rail 168" (14 Feet) Black
 - 04 x XR-10-SPLC-M1: XR10 Bonded Splice (Incl. Self-tapping Screws)
- CLAMPS & GROUNDING**
- 52 x UFO-CL-01-B1: Universal Module Clamp, Black
 - 40 x CAMO-01-M1: Hidden End Cam (universal clamp)
 - 10 x XR-LUG-03-A1: Grounding Lug, Low Profile
- ATTACHMENTS**
- 84 x FF2-01-M2: Flash Foot2, Mill
 - 84 x BHW-SQ-02-A1: Square-Bolt Bonding Hardware
- ACCESSORIES**
- 02 x XR-10-CAP: Kit, End Cap XR10 (10 sets per bag)
 - 36 x BHW-MI-01-A1: Microinverter Bonding Hardware, T-Bolt

- SOLAR MODULES**
- 36 x Solaria PowerXT-360R-PD
- INVERTER & SUPPORTING ITEMS**
- 01 x SolarEdge SE11400H-US (with Cons. Meter SE11400H-US00BN14)
 - 36 x SolarEdge Power Optimizer P370
 - 02 x 200A SolarEdge CTs
- WIRE & DISCONNECTS**
- 500 ft x PV WIRE BLK (Cu)

Roof B
22 Modules

BILL OF MATERIAL
SCALE: 3/32" - 1' 0"



1	A	06/22/2020

JOB NUMBER: 20-82-JR00
DATE ISSUED: 06/22/2020
PROJECT STATUS: PERMITTING

SHEET: **BILL OF MATERIAL**

JR
2082JR00-6



Solaria PowerXT®-360R-PD

Achieving 20% efficiency, Solaria PowerXT solar panels are one of the highest power panels in the residential and commercial solar market. Compared to conventional panels, Solaria PowerXT panels have fewer gaps between the solar cells; this leads to higher power and superior aesthetics. Solaria PowerXT Pure Black™ panels are manufactured with black backsheet and frames, enhancing a home or building's architectural beauty.

Higher Efficiency, Higher Power

Solaria PowerXT panels achieve up to 20.5% efficiency; conventional panels achieve 15% – 17% efficiency. Solaria PowerXT panels are one of the highest power panels available.

Lower System Costs

Solaria PowerXT panels produce more power per square meter area. This reduces installation costs due to fewer balance of system components.

Improved Shading Tolerance

Sub-strings are interconnected in parallel, within each of the four panel quadrants, which dramatically lowers the shading losses and boosts energy yield.

Improved Aesthetics

Compared to conventional panels, Solaria PowerXT panels have a more uniform appearance and superior aesthetics.

Durability and Reliability

Solder-less cell interconnections are highly reliable and designed to far exceed the industry leading 25 year warranty.

PID Resistant

Solaria PowerXT panels are PID resistant. This insures stable and predictable energy production over time.



About Solaria

Established in 2000, The Solaria Corporation has created one of the industry's most respected IP portfolios, with over 250 issued and pending patents in PV solar cell and module technology. Headquartered in Oakland, California, Solaria has developed a technology platform that unlocks the potential of solar energy.



Performance at STC (1000W/m², 25° C, AM 1.5)

Solaria PowerXT-		360R-PD
Max Power (P _{max})	[W]	360
Efficiency	[%]	19.9
Open Circuit Voltage (V _{oc})	[V]	47.7
Short Circuit Current (I _{sc})	[A]	9.56
Max Power Voltage (V _{mp})	[V]	39.5
Max Power Current (I _{mp})	[A]	9.13
Power Tolerance	[%]	-0/+3

Performance at NOCT (800W/m², 20°C Amb, Wind 1 m/s, AM 1.5)

Max Power (P _{max})	[W]	265
Open Circuit Voltage (V _{oc})	[V]	44.8
Short Circuit Current (I _{sc})	[A]	7.71
Max Power Voltage (V _{mp})	[V]	36.3
Max Power Current (I _{mp})	[A]	7.30


Temperature Characteristics

NOCT	[°C]	45 +/-2
Temp. Coeff. of P _{max}	[% / °C]	-0.39
Temp. Coeff. of V _{oc}	[% / °C]	-0.29
Temp. Coeff. of I _{sc}	[% / °C]	0.04


Design Parameters

Operating temperature	[°C]	-40 to +85
Max System Voltage	[V]	1000
Max Fuse Rating	[A]	15
Bypass Diodes	[#]	4

IV Curves vs. Irradiance (370W Panel)

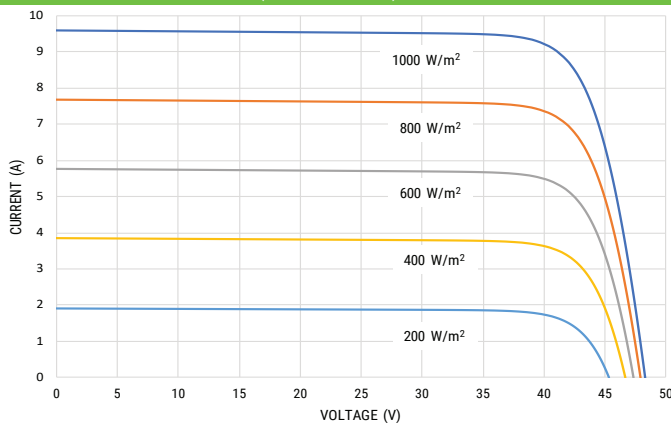

Comprehensive 25-Year Warranty

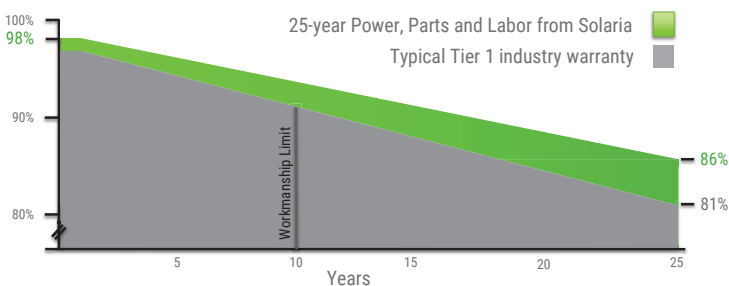

Mechanical Characteristics

Cell Type	Monocrystalline Silicon
Dimensions (L x W x H)	63.8" x 43.9" x 1.57"
	1621mm x 1116mm x 40mm
Weight	21 kg / 46 lbs
Glass Type / Thickness	AR Coated, Tempered / 3.2mm
Frame Type	Black Anodized Aluminum
Cable Type / Length	12 AWG PV Wire (UL) / 1000mm
Connector Type	MC4
Junction Box	IP67 / 4 diodes
Front Load	5400 Pa / 113 psf*
Rear Load	3600 Pa / 75 psf*

* Refer to Solaria Installation Manual for details

Certifications / Warranty


Certifications	UL 1703/IEC 61215/IEC 61730/CEC CAN/CSA-C22.2
----------------	---

Fire Type (UL 1703)	1
Warranty	25 years*

* Warranty details at www.solaria.com

Packaging

Stacking Method	Horizontal / Palletized
Panels/ Pallet	25
Pallet Dims (L x W x H)	65.7" x 45.3" x 48.4"
	1668mm x 1150mm x 1230 mm
Pallet Weight	590 kg / 1300 lbs
Pallets / 40-ft Container	28
Panels / 40-ft Container	700

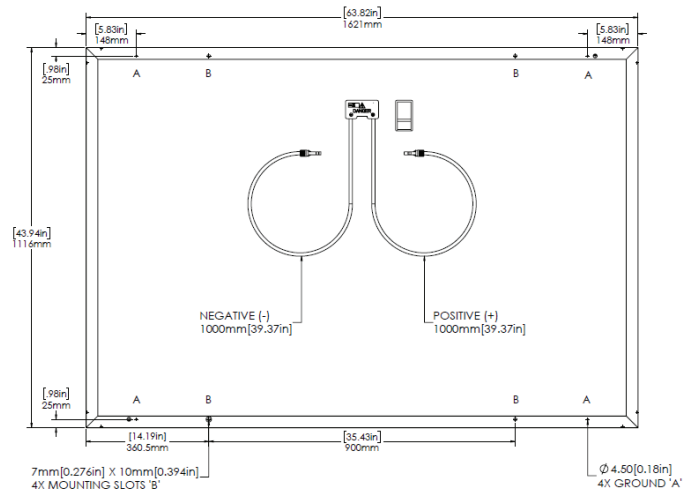

MOUNTING SLOT 'B'

FRAME PROFILE

Single Phase Inverter with HD-Wave Technology

for North America

SE3000H-US / SE3800H-US / SE5000H-US / SE6000H-US /
SE7600H-US / SE10000H-US / SE11400H-US



Optimized installation with HD-Wave technology

- / Specifically designed to work with power optimizers
- / Record-breaking 99% weighted efficiency
- / Quick and easy inverter commissioning directly from a smartphone using the SolarEdge SetApp
- / Fixed voltage inverter for longer strings
- / Integrated arc fault protection and rapid shutdown for NEC 2014 and 2017, per article 690.11 and 690.12
- / UL1741 SA certified, for CPUC Rule 21 grid compliance
- / Small, lightweight, and easy to install both outdoors or indoors
- / Built-in module-level monitoring
- / Optional: Faster installations with built-in consumption metering (1% accuracy) and production revenue grade metering (0.5% accuracy, ANSI C12.20)

/ Single Phase Inverter with HD-Wave Technology for North America

SE3000H-US / SE3800H-US / SE5000H-US / SE6000H-US/
SE7600H-US / SE10000H-US / SE11400H-US

MODEL NUMBER	SE3000H-US	SE3800H-US	SE5000H-US	SE6000H-US	SE7600H-US	SE10000H-US	SE11400H-US	
APPLICABLE TO INVERTERS WITH PART NUMBER	SEXXXXH-XXXXXBXX4							
OUTPUT								
Rated AC Power Output	3000	3800 @ 240V 3300 @ 208V	5000	6000 @ 240V 5000 @ 208V	7600	10000	11400 @ 240V 10000 @ 208V	VA
Maximum AC Power Output	3000	3800 @ 240V 3300 @ 208V	5000	6000 @ 240V 5000 @ 208V	7600	10000	11400 @ 240V 10000 @ 208V	VA
AC Output Voltage Min.-Nom.-Max. (211 - 240 - 264)	✓	✓	✓	✓	✓	✓	✓	Vac
AC Output Voltage Min.-Nom.-Max. (183 - 208 - 229)	-	✓	-	✓	-	-	✓	Vac
AC Frequency (Nominal)	59.3 - 60 - 60.5 ⁽¹⁾							Hz
Maximum Continuous Output Current @240V	12.5	16	21	25	32	42	47.5	A
Maximum Continuous Output Current @208V	-	16	-	24	-	-	48.5	A
Power Factor	1, Adjustable - 0.85 to 0.85							
GFDI Threshold	1							A
Utility Monitoring, Islanding Protection, Country Configurable Thresholds	Yes							
INPUT								
Maximum DC Power @240V	4650	5900	7750	9300	11800	15500	17650	W
Maximum DC Power @208V	-	5100	-	7750	-	-	15500	W
Transformer-less, Ungrounded	Yes							
Maximum Input Voltage	480							Vdc
Nominal DC Input Voltage	380				400			Vdc
Maximum Input Current @240V ⁽²⁾	8.5	10.5	13.5	16.5	20	27	30.5	Adc
Maximum Input Current @208V ⁽²⁾	-	9	-	13.5	-	-	27	Adc
Max. Input Short Circuit Current	45							Adc
Reverse-Polarity Protection	Yes							
Ground-Fault Isolation Detection	600k Ω Sensitivity							
Maximum Inverter Efficiency	99	99.2						%
CEC Weighted Efficiency	99						99 @ 240V 98.5 @ 208V	%
Nighttime Power Consumption	< 2.5							W

⁽¹⁾ For other regional settings please contact SolarEdge support

⁽²⁾ A higher current source may be used; the inverter will limit its input current to the values stated

/ Single Phase Inverter with HD-Wave Technology for North America

SE3000H-US / SE3800H-US / SE5000H-US / SE6000H-US/
SE7600H-US / SE10000H-US / SE11400H-US


MODEL NUMBER	SE3000H-US	SE3800H-US	SE5000H-US	SE6000H-US	SE7600H-US	SE10000H-US	SE11400H-US		
ADDITIONAL FEATURES									
Supported Communication Interfaces	RS485, Ethernet, ZigBee (optional), Cellular (optional)								
Revenue Grade Metering, ANSI C12.20	Optional ⁽³⁾								
Consumption metering									
Inverter Commissioning	With the SetApp mobile application using Built-in Wi-Fi Access Point for Local Connection								
Rapid Shutdown - NEC 2014 and 2017 690.12	Automatic Rapid Shutdown upon AC Grid Disconnect								
STANDARD COMPLIANCE									
Safety	UL1741, UL1741 SA, UL1699B, CSA C22.2, Canadian AFCI according to T.I.L. M-07								
Grid Connection Standards	IEEE1547, Rule 21, Rule 14 (HI)								
Emissions	FCC Part 15 Class B								
INSTALLATION SPECIFICATIONS									
AC Output Conduit Size / AWG Range	1" Maximum / 14-6 AWG				1" Maximum /14-4 AWG				
DC Input Conduit Size / # of Strings / AWG Range	1" Maximum / 1-2 strings / 14-6 AWG				1" Maximum / 1-3 strings / 14-6 AWG				
Dimensions with Safety Switch (HxWxD)	17.7 x 14.6 x 6.8 / 450 x 370 x 174				21.3 x 14.6 x 7.3 / 540 x 370 x 185				in / mm
Weight with Safety Switch	22 / 10	25.1 / 11.4	26.2 / 11.9	38.8 / 17.6					lb / kg
Noise	< 25				<50				dBA
Cooling	Natural Convection								
Operating Temperature Range	-40 to +140 / -40 to +60 ⁽⁴⁾								°F / °C
Protection Rating	NEMA 4X (Inverter with Safety Switch)								

⁽³⁾ Inverter with Revenue Grade Meter P/N: SExxxxH-US000BNC4; Inverter with Revenue Grade Production and Consumption Meter P/N: SExxxxH-US000BN14 . For consumption metering, current transformers should be ordered separately: SEACT0750-200NA-20 or SEACT0750-400NA-20. 20 units per box

⁽⁴⁾ Full power up to at least 50°C / 122°F; for power de-rating information refer to: <https://www.solaredge.com/sites/default/files/se-temperature-derating-note-na.pdf>

How to Enable Consumption Monitoring

By simply wiring current transformers through the inverter's existing AC conduits and connecting them to the service panel, homeowners will gain full insight into their household energy usage helping them to avoid high electricity bills

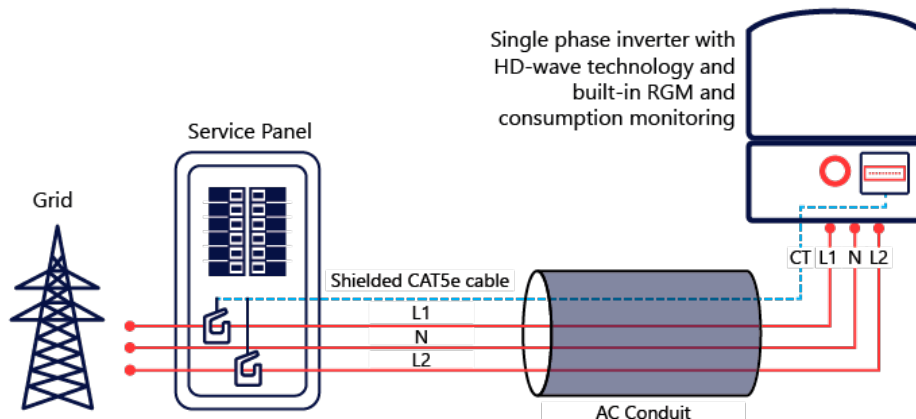

Power Optimizer

For North America

P320 / P340 / P370 / P400 / P401 / P405 / P485 / P505

POWER OPTIMIZER



PV power optimization at the module-level

- Specifically designed to work with SolarEdge inverters
- Up to 25% more energy
- Superior efficiency (99.5%)
- Mitigates all types of module mismatch losses, from manufacturing tolerance to partial shading
- Flexible system design for maximum space utilization
- Fast installation with a single bolt
- Next generation maintenance with module-level monitoring
- Meets NEC requirements for arc fault protection (AFCI) and Photovoltaic Rapid Shutdown System (PVRSS)
- Module-level voltage shutdown for installer and firefighter safety

Power Optimizer

For North America

P320 / P340 / P370 / P400 / P401 / P405 / P485 / P505

Optimizer model (typical module compatibility)	P320 (for 60-cell modules)	P340 (for high-power 60-cell modules)	P370 (for higher-power 60 and 72-cell modules)	P400 (for 72 & 96-cell modules)	P401 (for high power 60 and 72 cell modules)	P405 (for high-voltage modules)	P485 (for high-voltage modules)	P505 (for higher current modules)	
INPUT									
Rated Input DC Power ⁽¹⁾	320	340	370	400		405	485	505	W
Absolute Maximum Input Voltage (Voc at lowest temperature)	48		60	80	60	125 ⁽²⁾		83 ⁽²⁾	Vdc
MPPT Operating Range	8 - 48		8 - 60	8 - 80	8-60	12.5 - 105		12.5 - 83	Vdc
Maximum Short Circuit Current (Isc)	11			10.1	11.75	11		14	Adc
Maximum DC Input Current	13.75			12.5	14.65	12.5		17.5	Adc
Maximum Efficiency	99.5								%
Weighted Efficiency	98.8							98.6	%
Overvoltage Category	II								
OUTPUT DURING OPERATION (POWER OPTIMIZER CONNECTED TO OPERATING SOLAREEDGE INVERTER)									
Maximum Output Current	15								Adc
Maximum Output Voltage	60					85			Vdc
OUTPUT DURING STANDBY (POWER OPTIMIZER DISCONNECTED FROM SOLAREEDGE INVERTER OR SOLAREEDGE INVERTER OFF)									
Safety Output Voltage per Power Optimizer	1 ± 0.1								Vdc
STANDARD COMPLIANCE									
EMC	FCC Part15 Class B, IEC61000-6-2, IEC61000-6-3								
Safety	IEC62109-1 (class II safety), UL1741								
Material	UL94 V-0, UV Resistant								
RoHS	Yes								
INSTALLATION SPECIFICATIONS									
Maximum Allowed System Voltage	1000								Vdc
Compatible inverters	All SolarEdge Single Phase and Three Phase inverters								
Dimensions (W x L x H)	129 x 153 x 27.5 / 5.1 x 6 x 1.1			129 x 153 x 33.5 / 5.1 x 6 x 1.3	129 x 153 x 29.5 / 5.1 x 6 x 1.16	129 x 159 x 49.5 / 5.1 x 6.3 x 1.9		129 x 162 x 59 / 5.1 x 6.4 x 2.3	mm / in
Weight (including cables)	630 / 1.4			750 / 1.7	655 / 1.5	845 / 1.9		1064 / 2.3	gr / lb
Input Connector	MC4 ⁽³⁾					Single or dual MC4 ⁽³⁾⁽⁴⁾	MC4 ⁽³⁾		
Input Wire Length	0.16 / 0.52								m / ft
Output Wire Type / Connector	Double Insulated / MC4								
Output Wire Length	0.9 / 2.95			1.2 / 3.9					m / ft
Operating Temperature Range ⁽⁵⁾	-40 - +85 / -40 - +185								°C / °F
Protection Rating	IP68 / NEMA6P								
Relative Humidity	0 - 100								%

(1) Rated power of the module at STC will not exceed the optimizer "Rated Input DC Power". Modules with up to +5% power tolerance are allowed

(2) NEC 2017 requires max input voltage be not more than 80V

(3) For other connector types please contact SolarEdge

(4) For dual version for parallel connection of two modules use P485-4NMDMRM. In the case of an odd number of PV modules in one string, installing one P485 dual version power optimizer connected to one PV module. When connecting a single module seal the unused input connectors with the supplied pair of seals.

(5) For ambient temperature above +85°C / +185°F power de-rating is applied. Refer to Power Optimizers Temperature De-Rating Technical Note for more details.

PV System Design Using a SolarEdge Inverter ⁽⁶⁾⁽⁷⁾	Single Phase HD-Wave	Single phase	Three Phase for 208V grid	Three Phase for 277/480V grid	
Minimum String Length (Power Optimizers)	P320, P340, P370, P400, P401	8	10	18	
	P405, P485, P505	6	8	14	
Maximum String Length (Power Optimizers)		25	25	50 ⁽⁸⁾	
Maximum Power per String	5700 (6000 with SE7600-US - SE11400-US)	5250	6000 ⁽⁹⁾	12750 ⁽¹⁰⁾	W
Parallel Strings of Different Lengths or Orientations	Yes				

(6) For detailed string sizing information refer to: http://www.solaredge.com/sites/default/files/string_sizing_na.pdf

(7) It is not allowed to mix P405/P485/P505 with P320/P340/P370/P400/P401 in one string

(8) A string with more than 30 optimizers does not meet NEC rapid shutdown requirements; safety voltage will be above the 30V requirement

(9) For 208V grid: it is allowed to install up to 6,500W per string when the maximum power difference between each string is 1,000W

(10) For 277/480V grid: it is allowed to install up to 15,000W per string when the maximum power difference between each string is 2,000W

Subject: ETL Evaluation of SolarEdge Products to NEC 2017 Rapid Shutdown Requirements

To, whom it may concern

This letter represents the testing results of the below listed products to the requirements contained in the following standards:

The evaluation was done on the PV Rapid Shutdown System (PVRSS), and covers installations consisting of optimizers and inverters with part numbers listed below.

The testing done has verified that controlled conductors are limited to:

- Not more than 30 volts and 240 voltamperes within 30 seconds of rapid shutdown initiation outside the array.
- Not more than 80 volts and 240 voltamperes within 30 seconds of rapid shutdown initiation inside the array.

The rapid shutdown initiation is performed by either disconnecting the AC feed to the inverter, or – if the inverter DC Safety switch is readily accessible – by turning off the DC Safety switch.

Applicable products:

(1) Power optimizers:

PB followed by 001 to 350; followed by -AOB or -TFI.

OP followed by 001 to 500; followed by -LV, -MV, -IV or -EV.

P followed by 001 to 860.

SP followed by 001 to 350.

When optimizers are connected to 2 or more modules in series, the max input voltage may exceed 80V. Following the implementation of the NEC 2017 rapid shutdown value of 80V max inside of the array at the beginning of 2019, modules exceeding this combined input max voltage will be required to use optimizers with parallel inputs.

(2) 1 -PH Inverters

SE3000A-US / SE3800A-US / SE5000A-US / SE6000A-US / SE7600A-US / SE10000A-US / SE11400A-US / SE3000H-US / SE3800H-US / SE5000H-US / SE6000H-US / SE7600H-US / SE10000H-US / SE11400H-US when the following label is labeled on the side of the inverter:

Inverter part number may be followed by a suffix.


(3) 3 -PH Inverters

SE9KUS / SE10KUS / SE14.4KUS / SE20KUS / SE30KUS / SE33.3KUS / SE43.2KUS / SE66.6KUS / SE100KUS; when the following label is labeled on the side of the inverter:

Please note, this Letter Report does not represent authorization for the use of any Intertek certification marks.

Brand Name(s)	SolarEdge
Relevant Standard(s)	UL 1741, UL 1741 CRD for rapid shutdown National Electric Code, 2017, Section 690.12 requirement for rapid shutdown
Verification Issuing Office	3933 US Route 11, Cortland, NY 13045

NRTL Disclaimer, Different for each NRTL – Example: "This Verification is for the exclusive use of NRTL's Client and is provided pursuant to the agreement between NRTL and its Client. NRTL's responsibility and liability are limited to the terms and conditions of the agreement. NRTL assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Verification. Only the Client is authorized to copy or distribute this Verification. Any use of the NRTL name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by NRTL. The observations and test results referenced from this Verification are relevant only to the sample tested. This Verification by itself does not imply that the material, product, or service is or has ever been under an NRTL certification program."



Signature: 

Name: Mukund Rana
Position: Engineering Team Leader
Date: 2/11/2020

Solar Is Not Always Sunny

Over their lifetime, solar panels experience countless extreme weather events. Not just the worst storms in years, but the worst storms in 40 years. High winds capable of ripping panels from a roof, and snowfalls weighing enough to buckle a panel frame.

XR Rails are the structural backbone preventing these results. They resist uplift, protect against buckling and safely and efficiently transfer loads into the building structure. Their superior spanning capability requires fewer roof attachments, reducing the number of roof penetrations and the amount of installation time.

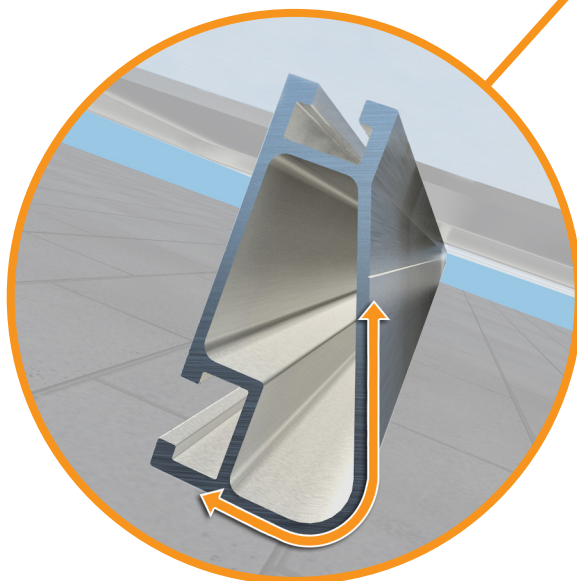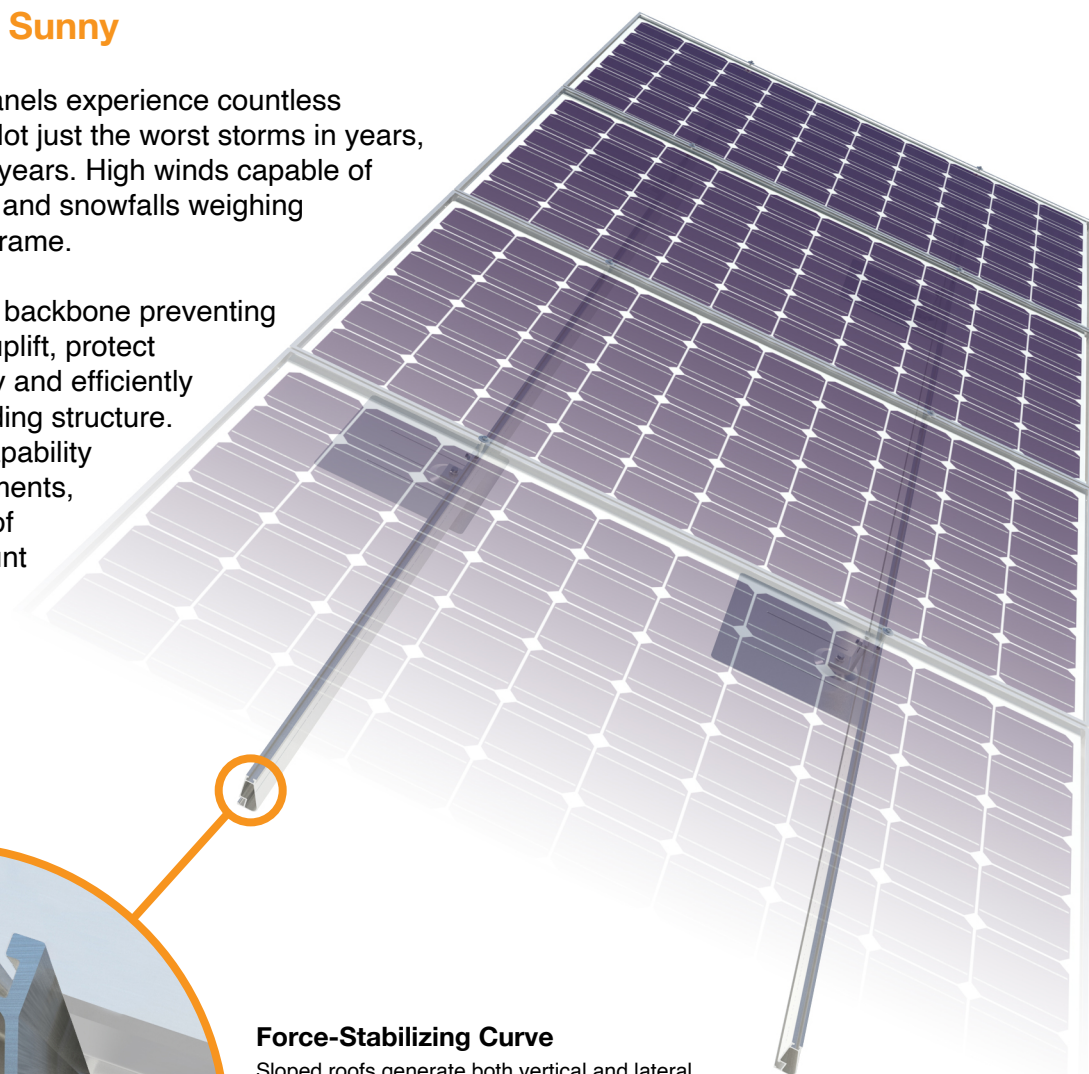

Force-Stabilizing Curve

Sloped roofs generate both vertical and lateral forces on mounting rails which can cause them to bend and twist. The curved shape of XR Rails is specially designed to increase strength in both directions while resisting the twisting. This unique feature ensures greater security during extreme weather and a longer system lifetime.

Compatible with Flat & Pitched Roofs




XR Rails are compatible with FlashFoot and other pitched roof attachments.



IronRidge offers a range of tilt leg options for flat roof mounting applications.

Corrosion-Resistant Materials

All XR Rails are made of 6000-series aluminum alloy, then protected with an anodized finish. Anodizing prevents surface and structural corrosion, while also providing a more attractive appearance.



XR Rail Family

The XR Rail Family offers the strength of a curved rail in three targeted sizes. Each size supports specific design loads, while minimizing material costs. Depending on your location, there is an XR Rail to match.



XR10

XR10 is a sleek, low-profile mounting rail, designed for regions with light or no snow. It achieves spans up to 6 feet, while remaining light and economical.


- 6' spanning capability
- Moderate load capability
- Clear & black anodized finish
- Internal splices available



XR100

XR100 is the ultimate residential mounting rail. It supports a range of wind and snow conditions, while also maximizing spans up to 10 feet.

- 10' spanning capability
- Heavy load capability
- Clear & black anodized finish
- Internal splices available

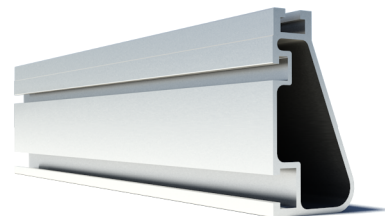

XR1000

XR1000 is a heavyweight among solar mounting rails. It's built to handle extreme climates and spans up to 12 feet for commercial applications.

- 12' spanning capability
- Extreme load capability
- Clear anodized finish
- Internal splices available

Rail Selection

The table below was prepared in compliance with applicable engineering codes and standards.* Values are based on the following criteria: ASCE 7-16, Gable Roof Flush Mount, Roof Zones 1 & 2e, Exposure B, Roof Slope of 8 to 20 degrees and Mean Building Height of 30 ft. Visit IronRidge.com for detailed certification letters.

Load		Rail Span					
Snow (PSF)	Wind (MPH)	4'	5' 4"	6'	8'	10'	12'
None	90						
	120						
	140	XR10		XR100		XR1000	
	160						
20	90						
	120						
	140						
	160						
30	90						
	160						
40	90						
	160						
80	160						
120	160						

*Table is meant to be a simplified span chart for conveying general rail capabilities. Use approved certification letters for actual design guidance.

The Strongest Attachment in Solar


IronRidge FlashFoot2 raises the bar in solar roof protection. The unique water seal design is both elevated and encapsulated, delivering redundant layers of protection against water intrusion. In addition, the twist-on Cap perfectly aligns the rail attachment with the lag bolt to maximize mechanical strength.

Twist-On Cap

FlashFoot2's unique Cap design encapsulates the lag bolt and locks into place with a simple twist. The Cap helps FlashFoot2 deliver superior structural strength, by aligning the rail and lag bolt in a concentric load path.


Single Socket Size

A custom-design lag bolt allows you to install FlashFoot2 with the same 7/16" socket size used on other Flush Mount System components.

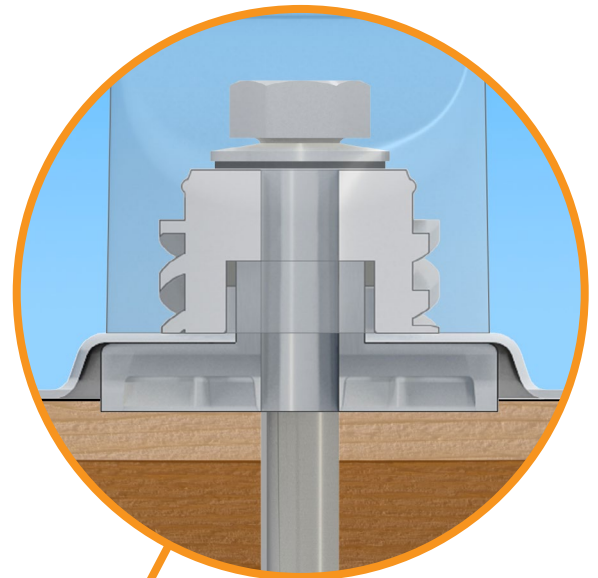

Three-Tier Water Seal


FlashFoot2's seal architecture utilizes three layers of protection. An elevated platform diverts water away, while a stack of rugged components raises the seal an entire inch. The seal is then fully-encapsulated by the Cap. FlashFoot2 is the first solar attachment to pass the TAS-100 Wind-Driven Rain Test.

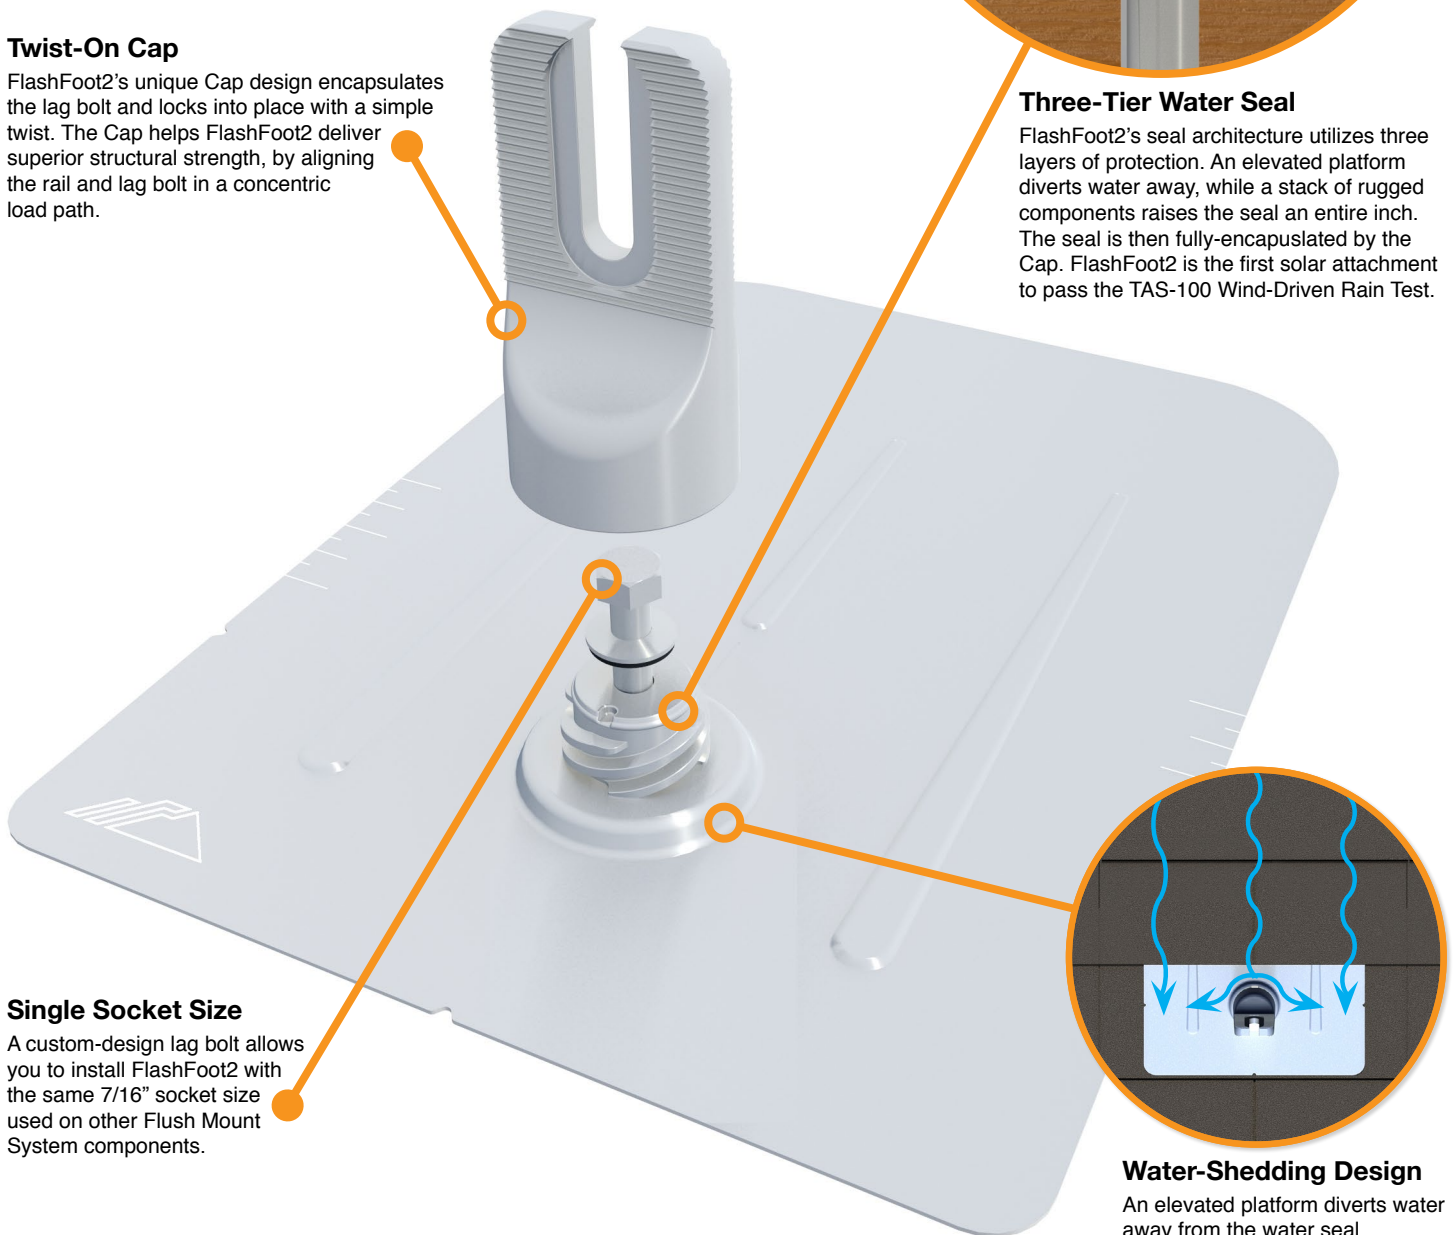

Water-Shedding Design

An elevated platform diverts water away from the water seal.

Installation Features

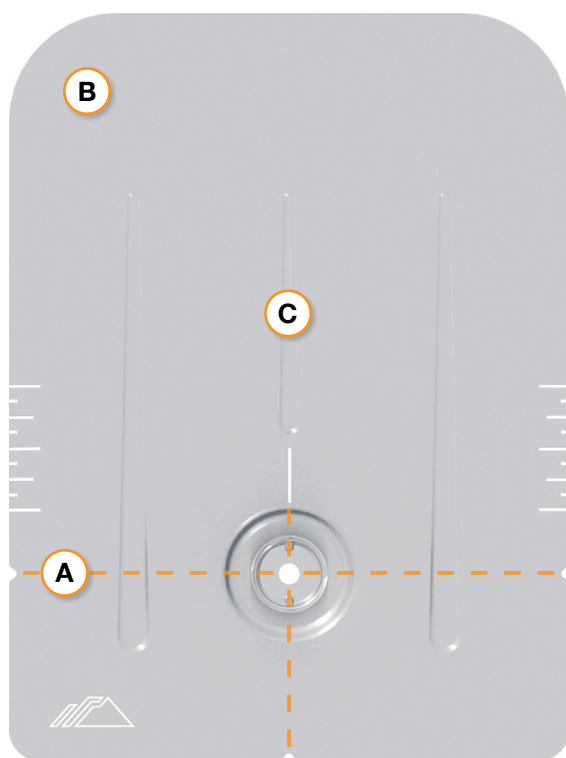

A Alignment Markers

Quickly align the flashing with chalk lines to find pilot holes.

B Rounded Corners

Makes it easier to handle and insert under the roof shingles.


C Reinforcement Ribs

Help to stiffen the flashing and prevent any bending or crinkling during installation.

Benefits of Concentric Loading

Traditional solar attachments have a horizontal offset between the rail and lag bolt, which introduces leverage on the lag bolt and decreases uplift capacity.

FlashFoot2 is the only product to align the rail and lag bolt. This concentric loading design results in a stronger attachment for the system.

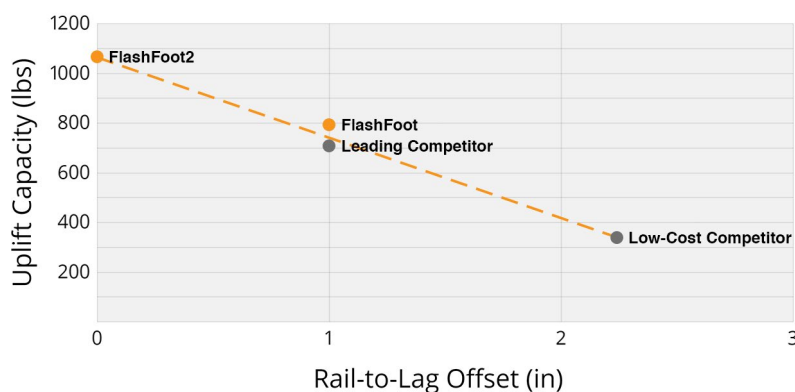

Testing & Certification

Structural Certification

Designed and Certified for Compliance with the International Building Code & ASCE/SEI-7.

Water Seal Ratings

Water Sealing Tested to UL 441 Section 27 "Rain Test" and TAS 100-95 "Wind Driven Rain Test" by Intertek. Ratings applicable for composition shingle roofs having slopes between 2:12 and 12:12.

UL 2703

Conforms to UL 2703 Mechanical and Bonding Requirements. See Flush Mount Install Manual for full ratings.

CHECKLIST

PRE-INSTALLATION

- Verify module compatibility. See [Page 13](#) for info.

TOOLS REQUIRED


- Cordless Drill (non-impact)
- Impact Driver (for lag bolts)
- Torque Wrench (0-250 in-lbs)
- 5/16" Socket
- 7/16" Socket
- 1/2" Socket
- String Line

TORQUE VALUES


- FlashFoot2 Lag Bolts (7/16" Socket): Fully Seat
- Bonded Splice Screws (5/16" Socket): 20 in-lbs
- Grounding Lug Nuts (7/16" Socket): 80 in-lbs
- Grounding Lug Terminal Screws (7/16" Socket): 20 in-lbs
- Universal Fastening Object (7/16" Socket): 80 in-lbs
- Expansion Joint Nuts (7/16" Socket): 80 in-lbs
- Flush Standoffs (1/2" Socket): 132 in-lbs
- Microinverter Kit Nuts (7/16" Socket): 80 in-lbs
- Frameless Module Kit Nuts (7/16" Socket): 80 in-lbs
- 3/8" Bonding Hardware Nuts (7/16" Socket): 250 in-lbs
- All Tile Hook Lags (7/16" Socket): Fully Seat
- All Tile Hook Carriage Bolts (7/16" Socket): 132 in-lbs
- Knockout Tile Lags (1/2" Socket): Fully Seat
- Knockout Tile Nuts (1/2" Socket): 132 in-lbs
- Flat Roof Attachment Nuts (9/16" Socket): 250 in-lbs

💡 If using FlashVue or previous version of: FlashFoot, Integrated Grounding Mid Clamps, Grounding Lug, End Clamps, and Expansion Joints please refer to Alternate Components Addendum (Version 1.3).


IRONRIDGE COMPONENTS




XR Rail




Bonded Splice




L-Foot




FlashFoot2




UFO and Stopper Sleeve




CAMO



8" Bonding Jumper



Grounding Lug




Expansion Joint




End Cap




Wire Clip




Flush Standoff




Microinverter Kit




3/8" Bonding Hardware




Frameless Module Kit




Frameless End/Mid Clamp




All Tile Hook




All Tile Hook Flashing



Knockout Tile



Flat Roof Attachment



Membrane Flashing