

A Groundworks' Company

Scope of Work for: 3330 Abattoir Rd. Angier, NC 27501

- *CrawlSeal System to include the following:
- -20 ml Vapor Barrier installed wall to wall with 100% floor coverage. All sections of liner will be overlapped a minimum of 1' and will be seamed together, attached with Christmas Tree fasteners, and caulked.
- -Install WallSeal on basement walls to help prevent water vapor and moisture intrusion as well as direct wall leakage to the waterproofing system. (12 ml Vapor Barrier on Walls)
- -Wrap all existing CMU/Brick Piers 20 ml Vapor Barrier. Contractor will leave a termite inspection gap at the top of each pier. The liner will be fastened to the pier and the top edge of the liner will be sealed with caulking.
- -All Vents will be sealed from inside the crawl space with R-10 Rigid 2" Foam Sheathing.
- *AprilAire E100 Dehumidifier install unit specifications on page 2
- *R-19 Insulation installed in the rim joist cavities.
- *Extreme Block R-10 Rigid 2" Foam Sheathing Wall Insulation installed with a 3-4" termite inspection reveal left at the top of the foundation wall. All vents will be sealed from the inside.


Using Existing Electrical



A Groundworks' Company

SPECIFICATIONS	
Capacity	
@ 80°F/60% RH	100 ppd
@ 73°F/60% RH	85 ppd
Energy Factor	
@ 80°F/60% RH	2.6 L/kW-h
@ 73°F/60% RH	2.35 L/kW-h
Airflow @ varying E.S.P. (external static pressure - dry coil))
0.0" w.c.	280 CFM
0.2" w.c.	245 CFM
0.4" w.c.	210 CFM
Voltage, phase, frequency	120VAC, 1 phase, 60 Hz
Current draw ⁽¹⁾	6.9 Amps
Noise	55 dBA ducted
	Width: 14"
Dimensions: (cabinet only) ⁽²⁾	Height: 15"
(Cabillet Olly)	Length: 26"
Unit Weight	64 lbs.
Shipping Weight	82 lbs.
Inlet air operating conditions duri	ng
-Dehumidification:	50°F-104°F, 40°F
	dew point min.
-Ventilation:	40°F-140°F, 0%-99% RH
	(non-condensing)

⁽P) Rated capacity, energy factor and current draw measured at 80°F/60% RH inlet air at 0.0 ESP.
(P) Height does not include adjustable feet. The width excludes the filter doors and length excludes the duct collars.

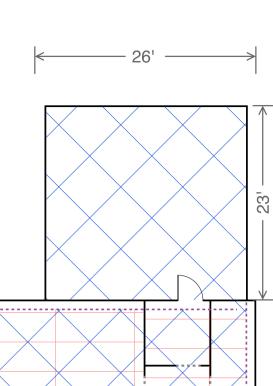



Tar Heel Basement Systems Certified Foundation and Waterproofing Inspector Jordan Williams 910.919.1748 jordan.williams@tarheelbasementsystems.com

Signature: /, ///

Amber Faw C#235525 3330 Abattoir Rd. Angier NC 27501

Discharge Line Crawl Drain AquaStop Sump Pump AquaStop Air System **Electric Outlet**



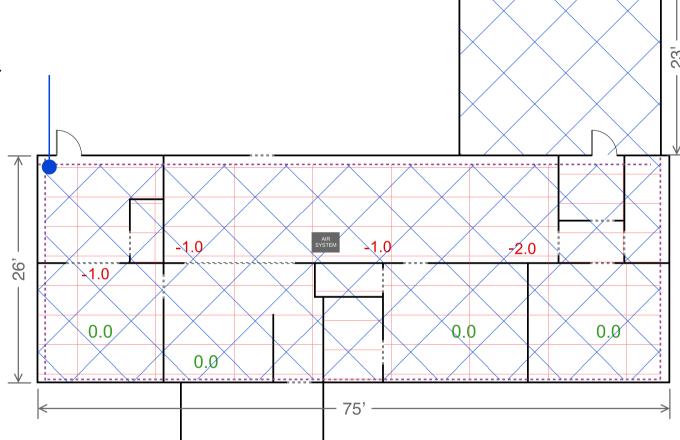

FRONT