

SCOPE OF WORK

TO INSTALL A RESIDENTIAL ROOFTOP SOLAR PHOTOVOLTAIC (PV) SYSTEM WITH BATTERY BACKUP. THE POWER GENERATED BY THE PV SYSTEM WILL BE INTERCONNECTED WITH THE UTILITY GRID THROUGH THE EXISTING ELECTRICAL SERVICE EQUIPMENT. THE PV SYSTEM INCLUDES BATTERIES.

ELECTRICAL NOTES

- 1) ALL EQUIPMENT TO BE LISTED BY THE UL OR OTHER NRTL AND LABELED FOR ITS APPLICATION.
- 2) ALL CONDUCTORS SHALL BE COPPER, RATED FOR 600V AND 90°C WET ENVIRONMENT.
- 3) WIRING, CONDUIT, AND RACEWAYS MOUNTED ON ROOFTOPS SHALL BE ROUTED DIRECTLY TO, AND LOCATED AS CLOSE AS POSSIBLE TO THE NEAREST RIDGE, HIP, OR VALLEY.
- 4) WORKING CLEARANCES AROUND ALL NEW AND EXISTING ELECTRICAL EQUIPMENT SHALL COMPLY WITH NEC 110.26.
- 5) DRAWINGS INDICATE THE GENERAL ARRANGEMENT OF SYSTEMS. CONTRACTOR SHALL FURNISH ALL NECESSARY OUTLETS, SUPPORTS, FITTINGS AND ACCESSORIES TO FULFILL APPLICABLE CODES AND STANDARDS.
- 6) WHERE SIZES OF JUNCTION BOXES, RACEWAYS, AND CONDUITS ARE NOT SPECIFIED, THE CONTRACTOR SHALL SIZE THEM ACCORDINGLY.
- 7) ALL WIRE TERMINATIONS SHALL BE APPROPRIATELY LABELED AND READILY VISIBLE.
- 8) MODULE GROUNDING CLIPS TO BE INSTALLED BETWEEN MODULE FRAME AND MODULE SUPPORT RAIL, PER THE GROUNDING CLIP MANUFACTURER'S INSTRUCTION.
- 9) MODULE SUPPORT RAIL TO BE BONDED TO CONTINUOUS COPPER G.E.C. VIA WEEB LUG OR THE ILSCO GBL-4DBT LAY-IN LUG.
- 10) THE POLARITY OF THE GROUNDED CONDUCTORS IS (positive/negative) OR THE DC SIDE OF THE PV SYSTEM IS UNGROUNDED AND SHALL COMPLY WITH NEC 690.35

NCDOT REQUIREMENTS

OPTION 2

WEIGHT OF PV SYSTEM ON ROOF:


2.6252 PSF

EXISTING ROOF MATERIAL TYPE:

ASPHALT SHINGLES (SINGLE LAYER)

PROJECT LOCATION WIND ZONE:

115 MPH

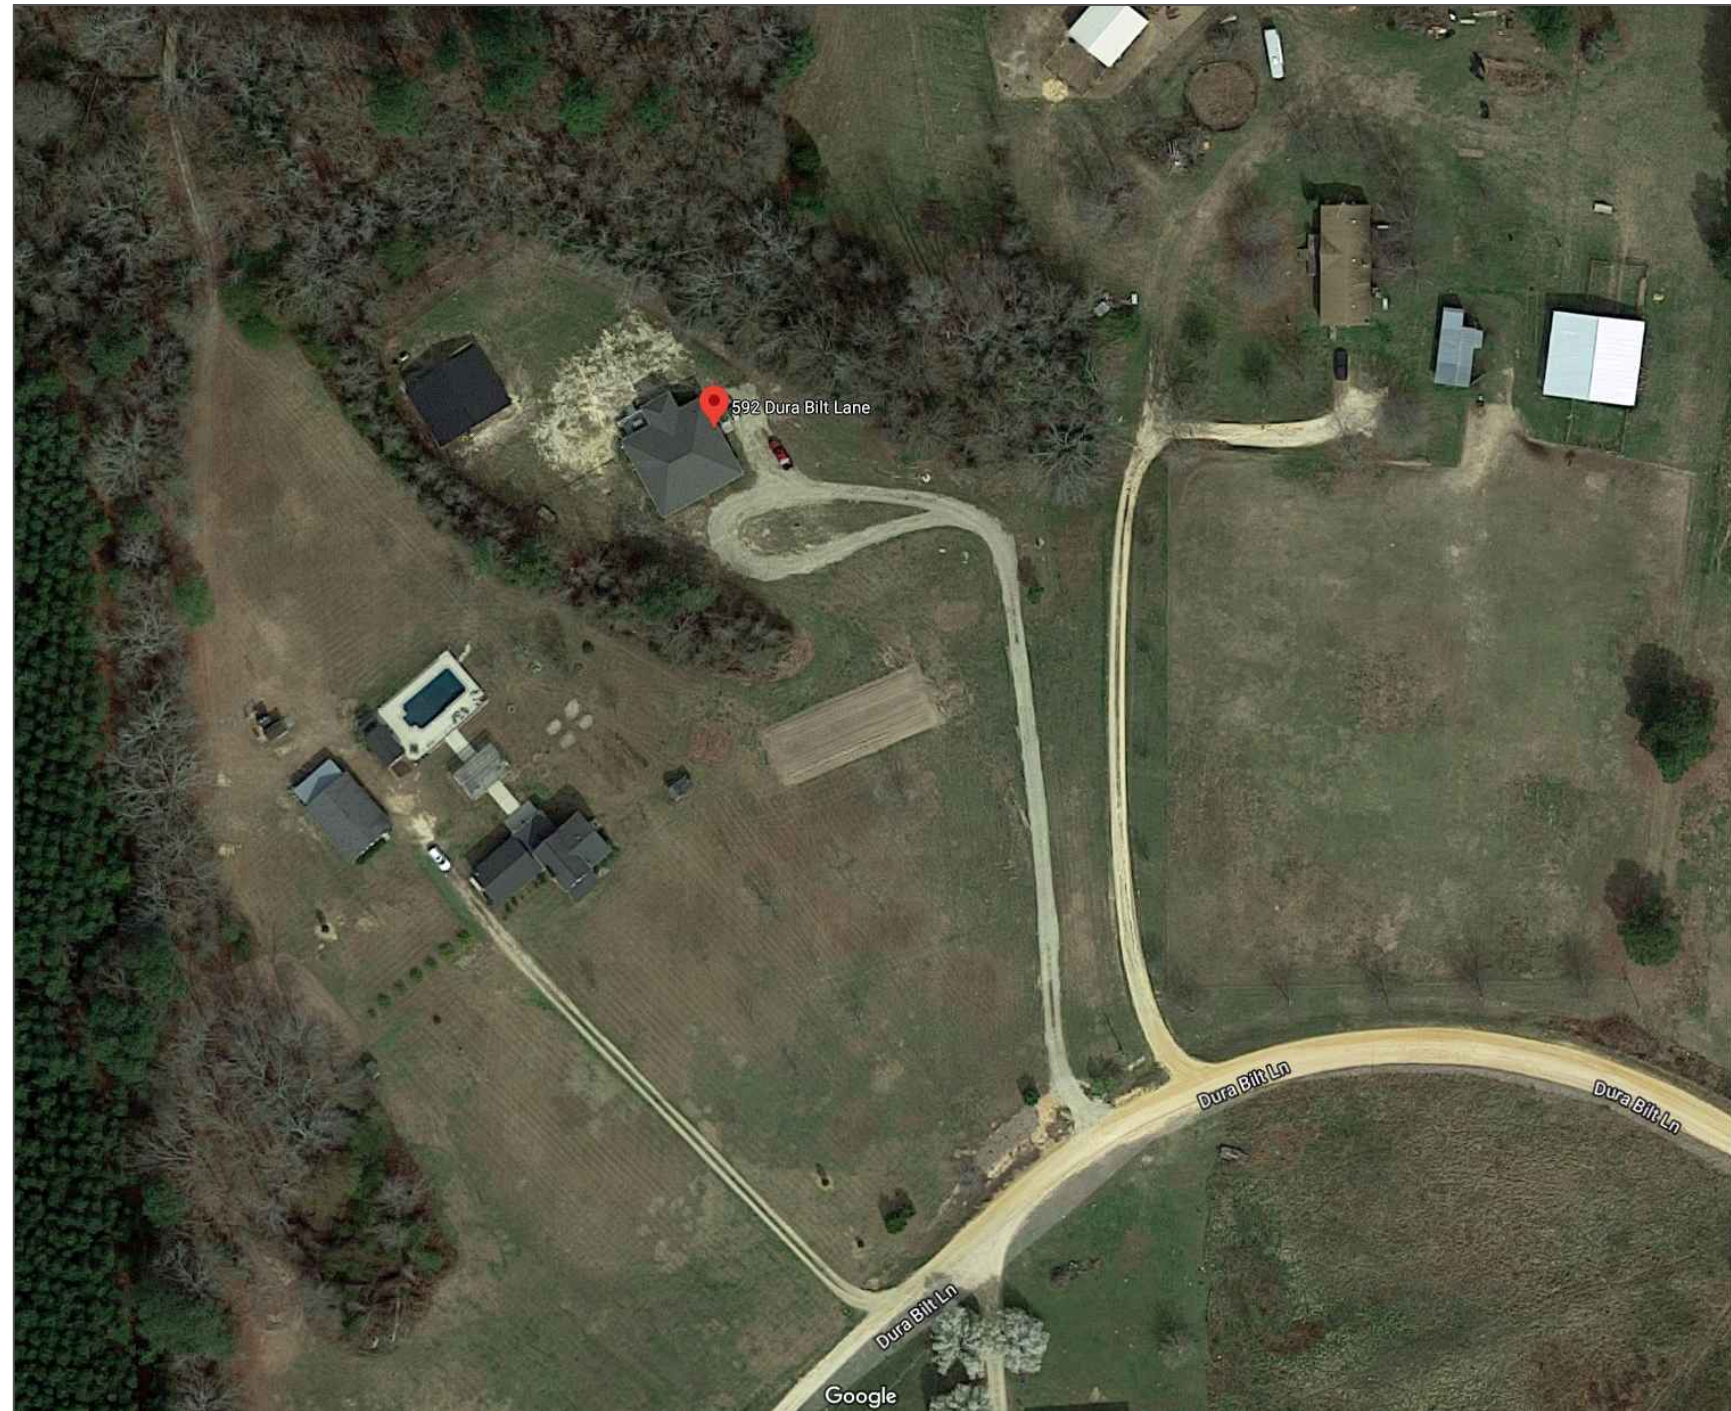

VICINITY MAP

CONTRACTOR



SUN DOLLAR ENERGY, LLC
 4904 ELAINE AVENUE
 RALEIGH, NC 27616
 (919) 508-6907
 NC ELE LICENSE #: 30043U
 NC GC LICENSE #: 73462

PROJECT & CLIENT INFORMATION

**MEREDITH RESIDENCE
 NEW SOLAR PV SYSTEM**
 SYSTEM SIZE: 10.24 KW DC
 SYSTEM SIZE: 12.0 KW AC

DANA MEREDITH
 592 DURA BILT LN
 COATS, NC 27521
 (910) 987-5108

ENGINEER OF RECORD

DRAWING BY

GBR

REVISIONS

DESCRIPTION	DATE	#	BY
RELEASED FOR PERMITTING	8/19/2020	1	GBR

SHEET SIZE

**ANSI B
 11" X 17"**

DATE

8/19/2020

SHEET NAME

**GENERAL
 INFORMATION**

SHEET NUMBER

COVER

SHEET INDEX

COVER	GENERAL INFORMATION
PV-1	SITE PLAN
PV-2	ROOF LAYOUT AND MOUNTING DETAIL
PV-3	ELECTRICAL SCHEMATIC
PV-4	AMPACITY CALCULATIONS AND WIRE SIZING
PV-5	LABELING SCHEDULE
CUTSHEETS	MANUFACTURER SPECIFICATION SHEETS

GOVERNING CODES

NFPA 70 NATIONAL ELECTRICAL CODE 2017
2018 INTERNATIONAL BUILDING CODE
2018 NORTH CAROLINA BUILDING CODE
2018 NORTH CAROLINA RESIDENTIAL CODE
UNDERWRITERS LABORATORIES (UL) STANDARDS
OSHA 29 CFR 1910.269
NORTH CAROLINA DEPARTMENT OF INSURANCE

DESIGN SPECIFICATIONS


CONSTRUCTION TYPE	SINGLE-FAMILY
ZONING	RESIDENTIAL
GROUND SNOW LOAD	20 PSF
WIND EXPOSURE CATEGORY	CATEGORY B
WIND SPEED	115 MPH
UTILITY PROVIDER	DUKE PROGRESS
AHJ	TOWN OF MORRISVILLE

SYSTEM SPECIFICATIONS

SOLAR MODULES	(32) SILFAB SIL-320NL 320 WATT MODULES
POWER OPTIMIZERS	(32) SMA TS4-R-F
INVERTER(S)	(2) SMA SB6.0-1SP-US-41
SOLAR MOUNTS	QUICKMOUNT PV L-MOUNTS
SOLAR RACKING SYSTEM	EVEREST CROSSRAIL X48
MONITORING	YES
POINT OF INTERCONNECT	60A/2P BREAKER IN MSP

PROPERTY PLAN

SCALE: 1/128"=1'-0"



CONTRACTOR



SUN DOLLAR ENERGY, LLC
 4904 ELAINE AVENUE
 RALEIGH, NC 27616
 (919) 508-6907
 NC ELE LICENSE #: 30043U
 NC GC LICENSE #: 73462

PROJECT & CLIENT INFORMATION

**MEREDITH RESIDENCE
 NEW SOLAR PV SYSTEM**
 SYSTEM SIZE: 10.24 KW DC
 SYSTEM SIZE: 12.0 KW AC

DANA MEREDITH
 592 DURA BILT LN
 COATS, NC 27521
 (910) 987-5108

ENGINEER OF RECORD

DRAWING BY

GBR

REVISIONS

DESCRIPTION	DATE	#	BY
RELEASED FOR PERMITTING	8/19/2020	1	GBR

SHEET SIZE

**ANSI B
 11" X 17"**

DATE

8/19/2020

SHEET NAME

SITE PLAN


SHEET NUMBER

PV-1

ROOF PLAN


SCALE: 3/32"=1'-0"

ROOF 1 PITCH: 25°
ROOF 2 PITCH: 25°

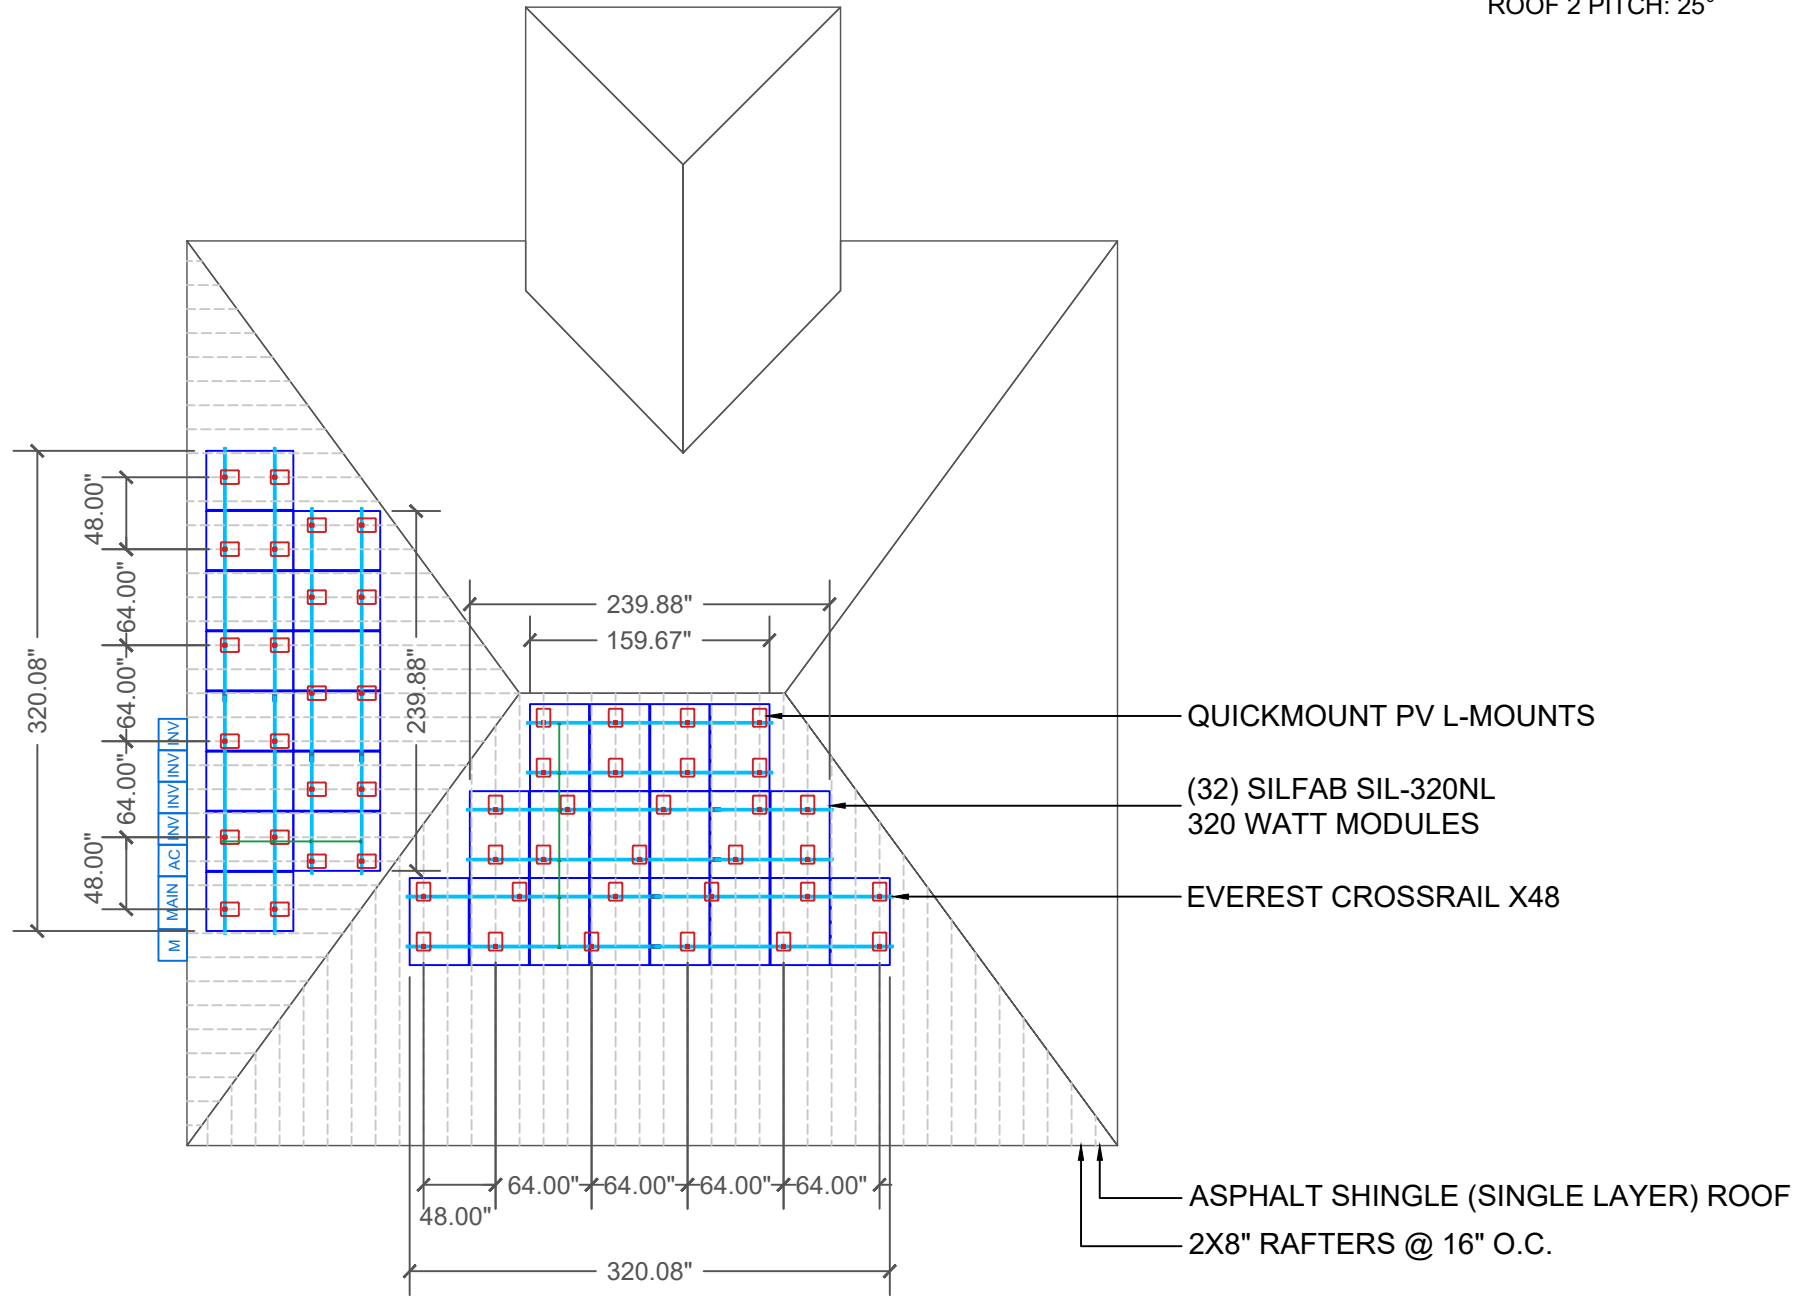

LOAD CALCULATIONS		
NUMBER OF MODULES	32	
MODULE WEIGHT	41	LBS
MODULE SQ FT	18.3046	SQ FT
TOTAL MODULE WEIGHT	1312	LBS
TOTAL MODULE SQ FT	585.7472	SQ FT
NUMBER OF PORTRAIT	32	
NUMBER OF LANDSCAPE	0	
NUMBER OF OPTIMIZERS	32	
WEIGHT PER OPTIMIZER	1.5	LBS
TOTAL OPTIMIZER WEIGHT	48	LBS
TOTAL LENGTH OF RAIL	214	LF
RAIL WEIGHT PER FOOT	0.56	LBS
TOTAL RAIL WEIGHT	119.84	LBS
NUMBER OF FLANGES	52	
WEIGHT PER FLANGE	0.7565	LBS
WEIGHT PER SYSTEM	39.338	LBS
NUMBER OF MID CLAMPS	54	
MID CLAMP WEIGHT	0.21	LBS
WEIGHT PER SYSTEM	11.34	LBS
NUMBER OF END CLAMPS	20	
END CLAMP WEIGHT	0.32	LBS
WEIGHT PER SYSTEM	6.4	LBS
NUMBER OF SPLICES	8	
WEIGHT PER SPLICE	0.1	LBS
WEIGHT PER SYSTEM	0.8	LBS
TOTAL ARRAY WEIGHT	1537.718	LBS
POINT LOAD	29.5715	LBS/FT
TOTAL ARRAY AREA	585.7472	SQ FT
ARRAY DEAD LOAD	2.6252	PSF

CONTRACTOR



SUN DOLLAR ENERGY, LLC
4904 ELAINE AVENUE
RALEIGH, NC 27616
(919) 508-6907
NC ELE LICENSE #: 30043U
NC GC LICENSE #: 73462

PROJECT & CLIENT INFORMATION

**MEREDITH RESIDENCE
NEW SOLAR PV SYSTEM**
SYSTEM SIZE: 10.24 KW DC
SYSTEM SIZE: 12.0 KW AC

DANA MEREDITH
592 DURA BILT LN
COATS, NC 27521
(910) 987-5108


ENGINEER OF RECORD

Flashings/Mounts	
Manufacturer	Quickmount PV
Mount Type	L-Mount
Flashing Material	Aluminum
Flashing Size	9" x 12" x .04"
Fastener Type	Lag Screw
Fastener Material	18-8 Stainless Steel
Fastener Size	5/16" x 4"
L-Foot Material	Aluminum
Sealing Washer	EPDM Bonded SS
Sealing Washer Size	5/16" ID x 3/4" OD
Weight	0.7565 Lbs.
Structural	IBC Compliant
UL Listing	UL 2703

Racking	
Manufacturer	Everest Solar
Model Number	Crossrail 48-X
Length	166"
Width	1.54"
Height	1.89"
Weight	0.56 Lbs./Ft
Material	Aluminum
Structural	IBC Compliant
UL Listing	UL 2703

LEGEND

UTILITY METER	DC DISCONNECT	PV METER	RAILS
MAIN SERVICE PANEL	JUNCTION BOX	EXTERIOR CONDUIT	GROUNDING
INVERTER	SUBPANEL	GAS METER	RAIL SPLICE
AC DISCONNECT	LOAD CENTER	FLASHINGS	

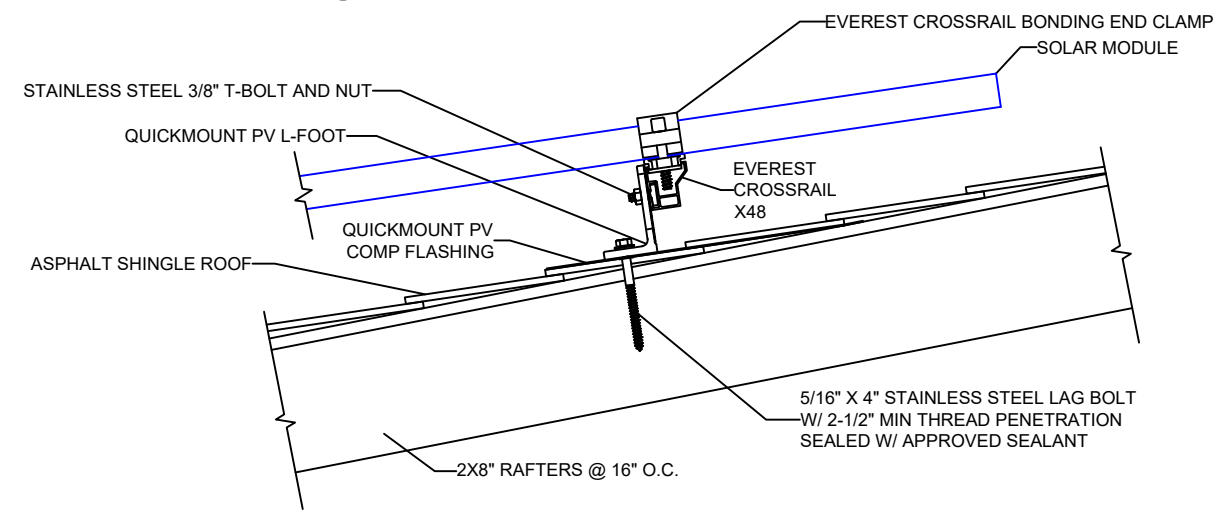

SOLAR MOUNTING DETAIL

DRAWING BY

GBR

REVISIONS

DESCRIPTION	DATE	#	BY
RELEASED FOR PERMITTING	8/19/2020	1	GBR

SHEET SIZE

**ANSI B
11" X 17"**

DATE

8/19/2020

SHEET NAME

**ROOF LAYOUT &
DETAIL DRAWINGS**

SHEET NUMBER

PV-2

Solar PV Module Data	
Manufacturer	Silfab
Model Number	SIL-320NL
Max Power (Pmax)	320
Max Power Voltage (Vmp)	32.88
Max Power Current (Imp)	9.74
Open Circuit Voltage (Voc)	40.1
Short Circuit Current (Isc)	10.32
Max Series Fuse (OCPD)	20
Max System Voltage	1000
UL Listing	UL1703
Protection Rating	IP67

Inverter Data	
Manufacturer	SMA
Model Number	SB6.0-1SP-US-41
Max DC Input Voltage	600
Nominal DC Input Voltage	480
Max DC Input Current	30
Max DC Short Circuit Current	54
Max DC Input Power	8520
Max AC Output Power	6000
Nominal AC Output Voltage	240
Max AC Output Current	25
Strings Per Inverter	1 - 3
UL Listing	UL1741
Enclosure Rating	NEMA 3R

Battery Inverter Data	
Manufacturer	SMA
Model Number	SI6048-US-10
Rated Grid Voltage / AC Voltage Range	120V / 105-132V
Rated AC Output Power	5750 Watts
Rated Current / Max Output Current	48A / 180A for 60ms
Rated Input Voltage / AC Input Voltage Range	120V / 80V-150V
Max AC Input Current / Rated AC Input Current	56A / 0A-56A
Max AC Input Power	6700 Watts
Rated Battery Input Voltage / Voltage Range	48V / 41V-63V
Max Charge Current / DC Rated Charge Current	130A / 110A
Number of Inverters	2
UL Listing	UL1741
Enclosure Rating	NEMA 1

AC Disconnect Data "A"	
Manufacturer	Eaton
Model Number	DH223NRV
Voltage Rating	240
Amperage Rating	100
Phase	Single
Switch Syle	Fusible
Fuse Rating	70
UL Listing	UL 98
Enclosure Rating	NEMA 3R

Main Service Panel Data	
Manufacturer	Eaton
Model Type	Cutler Hammer
Model Number	CH32B225R
Voltage Rating	120/240
Busbar Amp Rating	225A
Main Breaker/Main Lug	Main Breaker
Breaker Amp Rating	200A
Phase	Single
UL Listing	UL 67
Enclosure Rating	NEMA 3R


Temperature Data	
Average High Temp	93.2° F
Record Low Temp	10.4° F

Power Optimizer Data	
Manufacturer	SMA
Model Number	TS4-R-F
Rated DC Input Power	475
Max Input Voltage	90
Max Input Current	10.32
Max Short Circuit Current	12
Max Output Voltage	40.1
Max Output Current	9.74
UL Listing	UL1741
Protection Rating	IP68/NEMA4X

Junction Box Data	
Manufacturer	Soladeck
Model Number	0799-5B
Voltage Rating	600
Amperage Rating	120
UL Listing	UL 50
Enclosure Rating	NEMA 3R

Battery Data	
Manufacturer	Full River
Model Number	DC400-6
Battery Type	Sealed AGM
Nominal Voltage	6 Volts
Rated Capacity	400 Amp Hours
Cycling Capacity (20Hr Rate)	415 Amp Hours
Battery Dimensions	16.69" (H) x 11.61" (L) x 7.05" (W)
Weight	6700 Watts
UL Listing	48V / 41V-63V
Number of Batteries	130A / 110A

AC Disconnect Data "B"	
Manufacturer	GE
Model Number	TG3222R
Voltage Rating	240
Amperage Rating	60
Phase	Single
Switch Syle	Fusible
Fuse Rating	60
UL Listing	UL 98
Enclosure Rating	NEMA 3R

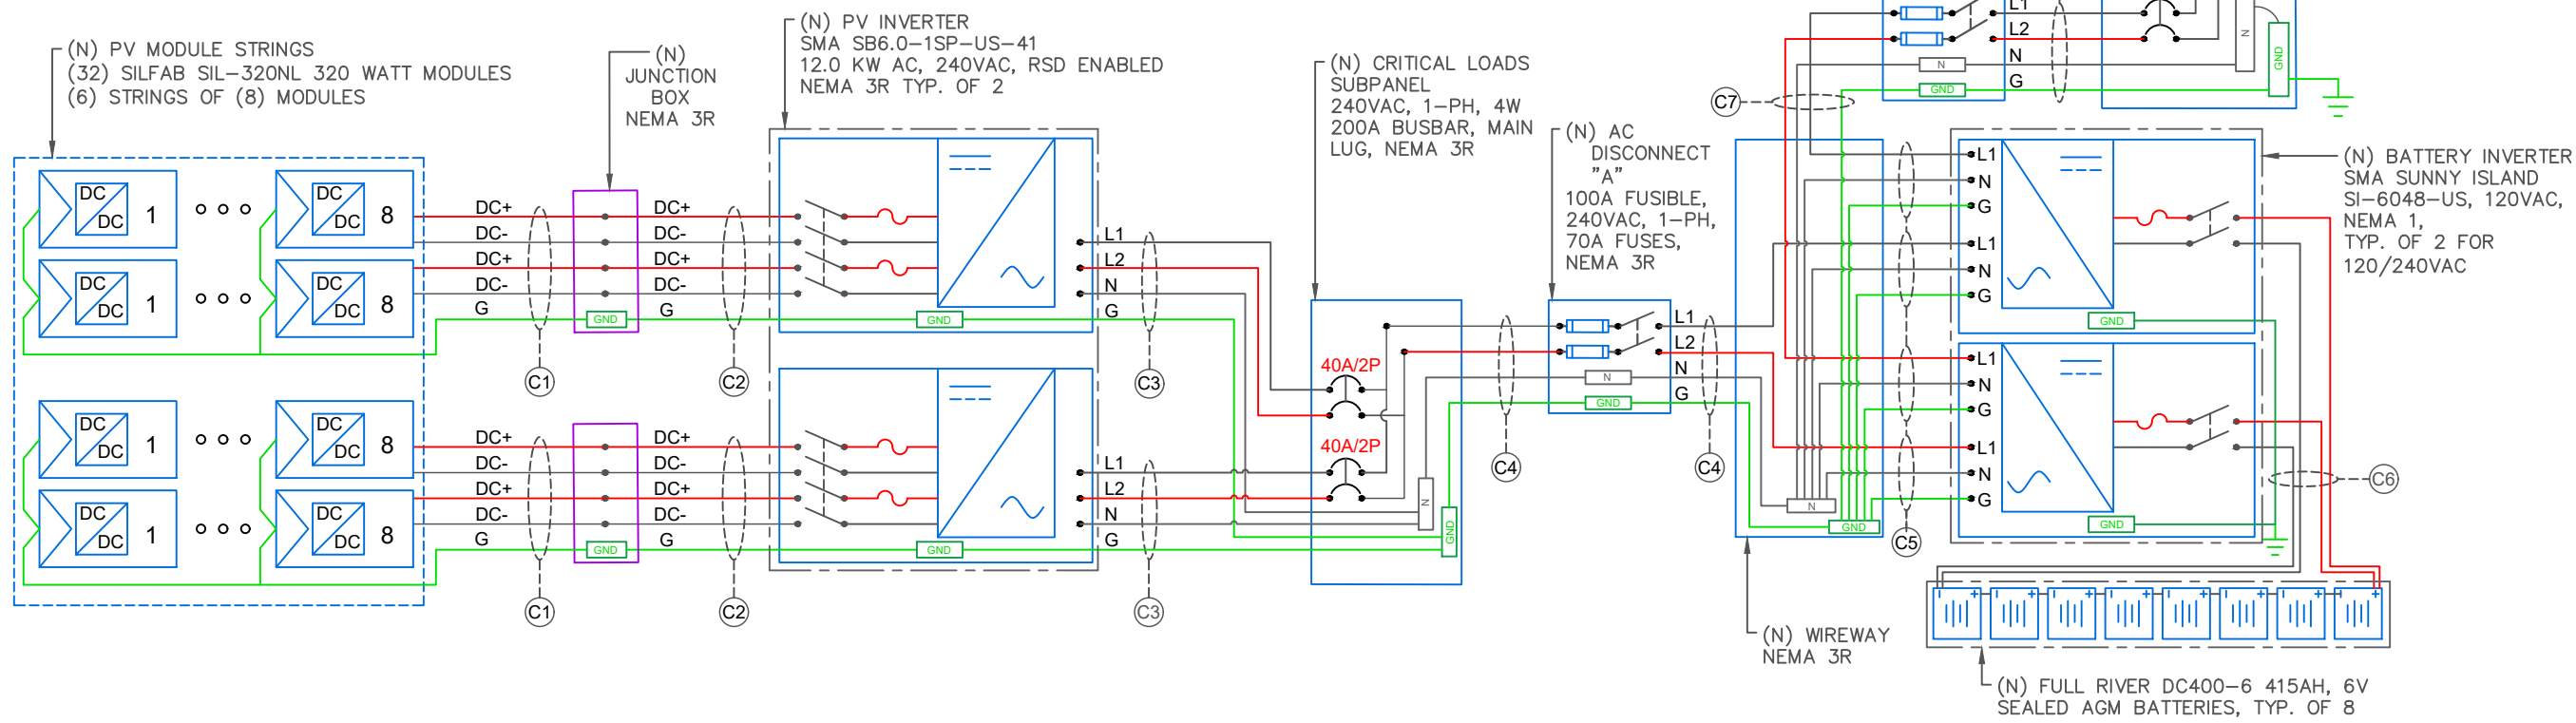

WIRE SCHEDULE													
TAG	CURRENT CARRYING CONDUCTORS				GROUNDING CONDUCTORS				CONDUIT/RACEWAY				NOTES
	QTY.	SIZE	MATERIAL	INSULATION TYP.	QTY.	SIZE	MATERIAL	INSULATION TYP.	QTY.	SIZE	MATERIAL	LOCATION	
C1	4	10 AWG	COPPER	PV WIRE	1	8 AWG	BARE COPPER	N/A	-	-	-	FREE AIR	PANELS TO JUNCTION BOX
C2	4	10 AWG	COPPER	THHN/THWN-2	1	10 AWG	COPPER	THHN/THWN-2	1	3/4"	LFMC/EMT	EXTERIOR/INTERIOR	JUNCTION BOX TO INVERTERS
C3	3	8 AWG	COPPER	THHN/THWN-2	1	10 AWG	COPPER	THHN/THWN-2	1	3/4"	LFNC/EMT	EXTERIOR	INVERTER TO SUBPANEL
C4	3	8 AWG	COPPER	THHN/THWN-2	1	10 AWG	COPPER	THHN/THWN-2	1	3/4"	LFNC/EMT	EXTERIOR	SUBPANEL TO DISCONNECT
C5	2	6 AWG	COPPER	THHN/THWN-2	1	6 AWG	COPPER	THHN/THWN-2	1	3/4"	LFNC	EXTERIOR	WIREWAY TO SUNNY ISLAND
C6	2	2/0 AWG	COPPER	MTW/AWM	1	6 AWG	COPPER	BARE	1	1-1/2"	PVC	INTERIOR	EGC TO GROUND ROD
C7	3	6 AWG	COPPER	THHN/THWN-2	1	10 AWG	COPPER	THHN/THWN-2	1	1"	LFNC	EXTERIOR	INTERCONNECTION TO MSP

CONTRACTOR

SUN DOLLAR ENERGY, LLC
4904 ELAINE AVENUE
RALEIGH, NC 27616
(919) 508-6907
NC ELE LICENSE #: 30043U
NC GC LICENSE #: 73462

PROJECT & CLIENT INFORMATION

**MEREDITH RESIDENCE
NEW SOLAR PV SYSTEM**
SYSTEM SIZE: 10.24 KW DC
SYSTEM SIZE: 12.0 KW AC

DANA MEREDITH
592 DURA BILT LN
COATS, NC 27521
(910) 987-5108

ENGINEER OF RECORD

DRAWING BY

GBR

REVISIONS

DESCRIPTION	DATE	#	BY
RELEASED FOR PERMITTING	8/19/2020	1	GBR

SHEET SIZE

**ANSI B
11" X 17"**

DATE

8/19/2020

SHEET NAME

**ELECTRICAL
SCHEMATIC**

SHEET NUMBER

PV-3

Ampacity Calculations

Wiring Location: Module to Power Optimizer (Direct Current)
 Wiring Location: Inverter to Service Entrance (Alternating Current)
 All calculations show minimum sizing for ampacity
 Actual wire sizing may be larger for voltage drop or other factors
 All calculations are according to the 2017 National Electric Code

Modules: Silfab Solar SIL-320NL

Inverter: SMA Sunny Boy SB6.0-1SP-US-41

Initial Input Values

Isc (Short Circuit Current)	10.32				
Number of circuits	10.32	x	1	=	10.32
Maximum Circuit Current (NEC 690.8 (A)(1+2))	10.32	x	156%	=	16.0992
Minimum Overcurrent Device	20	A	Series Fuse Rating by Manufacturer		
Chosen Conductor Type (THHN, RHW-2, or USE-2)	10	Size AWG #			

Conductor Derating

NEC 690.31 © ref (NEC 310.16)					
Conductor 90°C Ampacity	40				
Conduit Fill Derating	4-6	40	x	0.8	= 32
Temperature Derating (°F)	132-140	32	x	0.71	= 22.72

Ampacity vs Overcurrent Device

Conductor Ampacity Check	22.72	16.0992	OK
Conductor to Overcurrent Check	22.72	20	OK

Input Data Into Yellow Fields

Green Field must say OK

Use this calculation for over current protection and wire sizing for stringers coming from Solar Panels.
 Isc comes from manufacturer

Ampacity Calculations

Wiring Location: Inverter to Service Entrance (Alternating Current)
 All calculations show minimum sizing for ampacity
 Actual wire sizing may be larger for voltage drop or other factors
 All calculations are according to the 2017 National Electric Code

Modules: Silfab Solar SIL-320NL

Inverter: SMA Sunny Boy SB6.0-1SP-US-41

Initial Input Values

Inverter Continuous AC Output Combined (Watts)	6000
Minimum Operating Voltage	240

Inverter Continuous AC Amps	25	Watts	/	Volts	=	Amps
Number of Inverters	25	x	1	=	25	

Overcurrent Device Rating

NEC 690.8 (B)(3)	25	x	125%	=	31.25
Minimum Overcurrent Device	40	Amps			
Circuit Breaker Size per NEC 240.6(A)	40	Amps			

Size AWG #

Chosen Conductor Type	8
THHN, THWN, RHW-2 or USE-2	

Conductor Derating

NEC 690.31© ref (NEC 310.16)					
Conductor 90°C Ampacity	55				
Conduit Fill Derating	1-3	55	x	1	= 55
Temperature Derating (°F)	96-104	55	x	0.91	= 50.05

Ampacity vs Overcurrent Device

Conductor Ampacity Check	50.05	31.25	OK
Conductor to Overcurrent Check	50.05	40	OK

Input Data into Yellow Fields

Green Fields must say OK

Use this calculation for over current protection and wire sizing for inverter

CONTRACTOR



SUN DOLLAR ENERGY, LLC
 4904 ELAINE AVENUE
 RALEIGH, NC 27616
 (919) 508-6907
 NC ELE LICENSE #: 30043U
 NC GC LICENSE #: 73462

PROJECT & CLIENT INFORMATION

MEREDITH RESIDENCE
 NEW SOLAR PV SYSTEM
 SYSTEM SIZE: 10.24 KW DC
 SYSTEM SIZE: 12.0 KW AC

DANA MEREDITH
 592 DURA BILT LN
 COATS, NC 27521
 (910) 987-5108

ENGINEER OF RECORD

DRAWING BY

GBR

REVISIONS

DESCRIPTION	DATE	#	BY
RELEASED FOR PERMITTING	8/19/2020	1	GBR

SHEET SIZE

ANSI B
 11" X 17"

DATE

8/19/2020

SHEET NAME

AMPACITY
 CALCULATIONS

SHEET NUMBER

PV-4

SIGNAGE REQUIREMENTS

- > WARNING SIGNS OR LABELS SHALL COMPLY WITH NEC 110.21(B)
- > MIN. 3/8" LETTER HEIGHT
- > ALL CAPITAL LETTERS
- > ARIAL OR SIMILAR FONT
- > REFLECTIVE, WEATHER RESISTANT MATERIAL, UL 969

PV LABELS

**PHOTOVOLTAIC SYSTEM
DC DISCONNECT**

OPERATING VOLTAGE: VDC
 OPERATING CURRENT: AMPS
 MAX SYSTEM VOLTAGE: VDC
 SHORT CIRCUIT CURRENT: AMPS
 CHARGE CONTROLLER MAX: AMPS


NEC 690.53 1
 APPLY TO:
 INVERTER

WARNING: PHOTOVOLTAIC POWER SOURCE

NEC 690.31(G)(3)(4) 2
 APPLY TO:
 SOLAR DC CONDUIT

**SOLAR PV SYSTEM EQUIPPED
WITH RAPID SHUTDOWN**

TURN RAPID SHUTDOWN SWITCH TO THE "OFF" POSITION TO SHUT DOWN PV SYSTEM AND REDUCE SHOCK HAZARD IN THE ARRAY

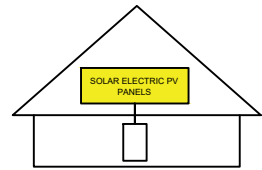

NEC 690.56(C)(1)(a) 3
 APPLY TO:
 SOLAREGE INVERTERS

! WARNING

ELECTRIC SHOCK HAZARD
 TERMINALS ON THE LINE AND
 LOAD SIDES MAY BE ENERGIZED
 IN THE OPEN POSITION

NEC 690.13(B) 4
 APPLY TO:
 DISCONNECTS
 SOLAR LOAD CENTERS
 COMBINER BOXES

**RAPID SHUTDOWN
SWITCH FOR
SOLAR PV SYSTEM**

NEC 690.5(C)(3) 5
 APPLY TO:
 SMA AND SOLAREGE INVERTERS

**PHOTOVOLTAIC SYSTEM
AC DISCONNECT**

OPERATING VOLTAGE: VDC
 OPERATING CURRENT: AMPS

NEC 690.54 6
 APPLY TO:
 AC DISCONNECT

! WARNING

TURN OFF PHOTOVOLTAIC
 AC DISCONNECT PRIOR TO
 WORKING INSIDE PANEL

NEC 110.27(C) & OSHA 1910.145(f)(7) 7
 APPLY TO:
 COMBINER BOXES
 ENCLOSURES
 BREAKER PANEL
 MAIN SERVICE DISCONNECT

SOLAR PV BREAKER

BREAKER IS BACKFED
 DO NOT RELOCATE

NEC 690.64(B)(7) & NEC 705.12(B)(2) 8
 APPLY TO:
 PV SYSTEM BREAKER

! WARNING

DUAL POWER SUPPLY
 SOURCES: UTILITY GRID AND
 PV SOLAR ELECTRIC SYSTEM

NEC 705.12(D)(3) & NEC 690.64 9
 APPLY TO:
 MAIN SERVICE PANEL
 METER

DC JUNCTION BOX


! WARNING

ELECTRIC SHOCK HAZARD
 THE DC CONDUCTORS OF
 THIS PHOTOVOLTAIC SYSTEM ARE
 UNGROUNDED AND MAY BE ENERGIZED

PHOTOVOLTAIC
 POWER SOURCE

NEC 690.31(G)(2) 10
 APPLY TO:
 DC JUNCTION BOXES

CONTRACTOR



**SUN DOLLAR
ENERGY, LLC**

SUN DOLLAR ENERGY, LLC
 4904 ELAINE AVENUE
 RALEIGH, NC 27616
 (919) 508-6907
 NC ELE LICENSE #: 30043U
 NC GC LICENSE #: 73462

PROJECT & CLIENT INFORMATION

**MEREDITH RESIDENCE
NEW SOLAR PV SYSTEM**

SYSTEM SIZE: 10.24 KW DC
 SYSTEM SIZE: 12.0 KW AC

DANA MEREDITH
 592 DURA BILT LN
 COATS, NC 27521
 (910) 987-5108

ENGINEER OF RECORD

DRAWING BY

GBR

REVISIONS

DESCRIPTION	DATE	#	BY
RELEASED FOR PERMITTING	8/19/2020	1	GBR

SHEET SIZE

**ANSI B
11" X 17"**

DATE


8/19/2020

SHEET NAME

**LABELING
SCHEDULE**

SHEET NUMBER

PV-5

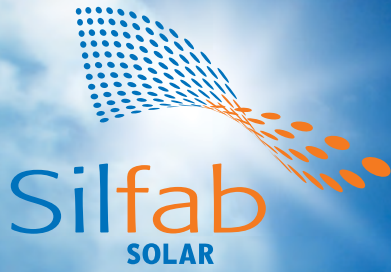

SIL-320 NL



60 Cell Monocrystalline PV Module



CHUBB®

* Chubb provides error and omission insurance to Silfab Solar Inc.

INDUSTRY LEADING WARRANTY

All our products include an industry leading 25-year product workmanship and 30-year performance warranty.

35+ YEARS OF SOLAR INNOVATION

Leveraging over 35+ years of worldwide experience in the solar industry, Silfab is dedicated to superior manufacturing processes and innovations such as Bifacial and Back Contact technologies, to ensure our partners have the latest in solar innovation.

NORTH AMERICAN QUALITY

Silfab is the leading automated solar module manufacturer in North America. Utilizing premium quality materials and strict quality control management to deliver the highest efficiency, premium quality PV modules 100% made in North America.



■ BAA / ARRA COMPLIANT

Silfab panels are designed and manufactured to meet Buy American Act Compliance. The US State Department, US Military and FAA have all utilized Silfab panels in their solar installations.

■ LIGHT AND DURABLE

Engineered to accommodate low load bearing structures up to 5400Pa. The light-weight frame is exclusively designed for wide-ranging racking compatibility and durability.

■ LOWEST DEFECT RATE

Total automation ensures strict quality controls during the entire manufacturing process at our ISO certified facilities. 48.18 ppm as per December 2018.

■ DOMESTIC PRODUCTION

Silfab Solar manufactures our PV modules in two automated locations within North America. Our 300+ North American team is ready to help our partners win the hearts and minds of customers, providing customer service and product delivery that is direct, efficient and local.

■ AESTHETICALLY PLEASING

All black sleek design, ideal for high-profile residential or commercial applications.

■ PID RESISTANT

PID Resistant due to advanced cell technology and material selection. In accordance to IEC 62804-1.

Electrical Specifications		SIL-320 NL mono PERC	
Test Conditions		STC	NOCT
Module Power (Pmax)	Wp	320	242
Maximum power voltage (Vpmax)	V	32.88	29.59
Maximum power current (Ipmax)	A	9.74	8.18
Open circuit voltage (Voc)	V	40.10	37.09
Short circuit current (Isc)	A	10.32	8.46
Module efficiency	%	18.8	17.8
Maximum system voltage (VDC)	V		1000
Series fuse rating	A		20
Power Tolerance	Wp		0 to +10

Measurement conditions: STC 1000 W/m² • AM 1.5 • Temperature 25 °C • NOCT 800 W/m² • AM 1.5 • Measurement uncertainty ≤ 3%
 • Sun simulator calibration reference modules from Fraunhofer Institute. Electrical characteristics may vary by ±5% and power by 0 to +10W.

Temperature Ratings		SIL-320 NL mono PERC	
Temperature Coefficient Isc		0.064 %/°C	
Temperature Coefficient Voc		-0.28 %/°C	
Temperature Coefficient Pmax		-0.36 %/°C	
NOCT (± 2°C)		45 °C	
Operating temperature		-40/+85 °C	

Mechanical Properties and Components		SIL-320 NL mono PERC	
	Metric	Imperial	
Module weight	18.6 kg ±0.2 kg	41 ±0.4 lbs	
Dimensions (H x L x D)	1700 mm x 1000 mm x 38 mm	66.9 in x 39.4 in x 1.5 in	
Maximum surface load (wind/snow)*	4000 Pa rear load / 5400 Pa front load N/m ²	83.5/112.8 lb/ft ²	
Hail impact resistance	Ø 25 mm at 83 km/h	Ø 1 in @ 51.6 mph	
Cells	60 - Si mono PERC - 5 busbar 158.75 x 158.75 mm	60 - Si mono PERC - 5 busbar 6.25 x 6.25 Inch	
Glass	3.2 mm high transmittance, tempered, DSM anti-reflective coating	0.126 high transmittance, tempered, DSM anti-reflective coating	
Cables and connectors (refer to installation manual)	1200 mm, Ø 5.7 mm, MC4 compatible	47.2 in, Ø 0.22 in, MC4 compatible	
Backsheet	High durability, superior hydrolysis resistance, multi-layer dielectric film		
Frame	Anodized Aluminum (Black)		
Bypass diodes	3 diodes-30SQ045T (45V max DC blocking voltage, 30A max forward rectified current)		
Junction Box	UL 3730 Certified, IP67 rated		
Warranties	SIL-320 NL mono PERC		
Module product workmanship warranty	25 years**		
Linear power performance guarantee	30 years		
	≥ 97% end 1 st year	≥ 90% end 12 th year	≥ 82% end 25 th year ≥ 80% end 30 th year



Certifications		SIL-320 NL mono PERC	
Product	ULC ORD C1703, UL 1703, CEC listed, IEC 62716 Ammonia Corrosion; IEC61701:2011 Salt Mist Corrosion Certified, UL Fire Rating: Type 2		
Factory	ISO9001:2015		

- Modules Per Pallet: 26
- Pallets Per Truck: 36
- Modules Per Truck: 936

*⚠ Warning. Read the Safety and Installation Manual for mounting specifications and before handling, installing and operating modules.

**12 year extendable to 25 years subject to registration and conditions outlined under "Warranty" at www.silfabsolar.com.

Third-party generated pan files from Fraunhofer-Institute for Solar Energy Systems ISE are available for download at: www.silfabsolar.com/downloads

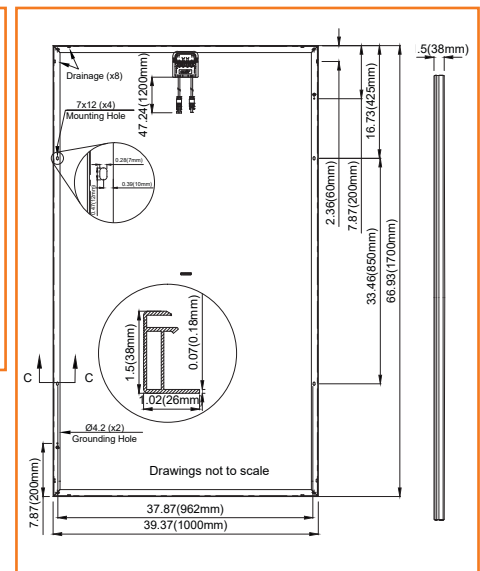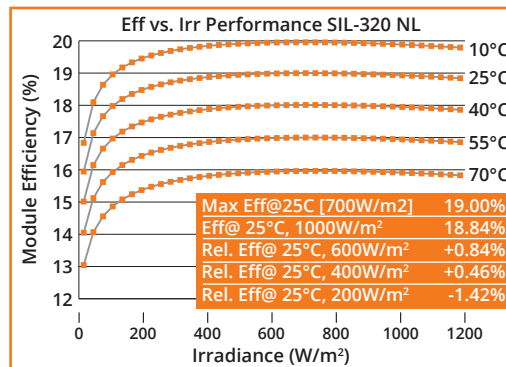

Silfab Solar Inc.
 240 Courtneypark Drive East
 Mississauga ON L5T 2Y3 Canada
 Tel +1 905-255-2501 | Fax +1 905-696-0267
 info@silfabsolar.com | www.silfabsolar.com




Silfab Solar Inc.
 800 Cornwall Ave
 Bellingham WA 98225 USA
 Tel +1 360-569-4733



TS4-R-F SUNSPEC RAPID SHUTDOWN

TS4-R-F

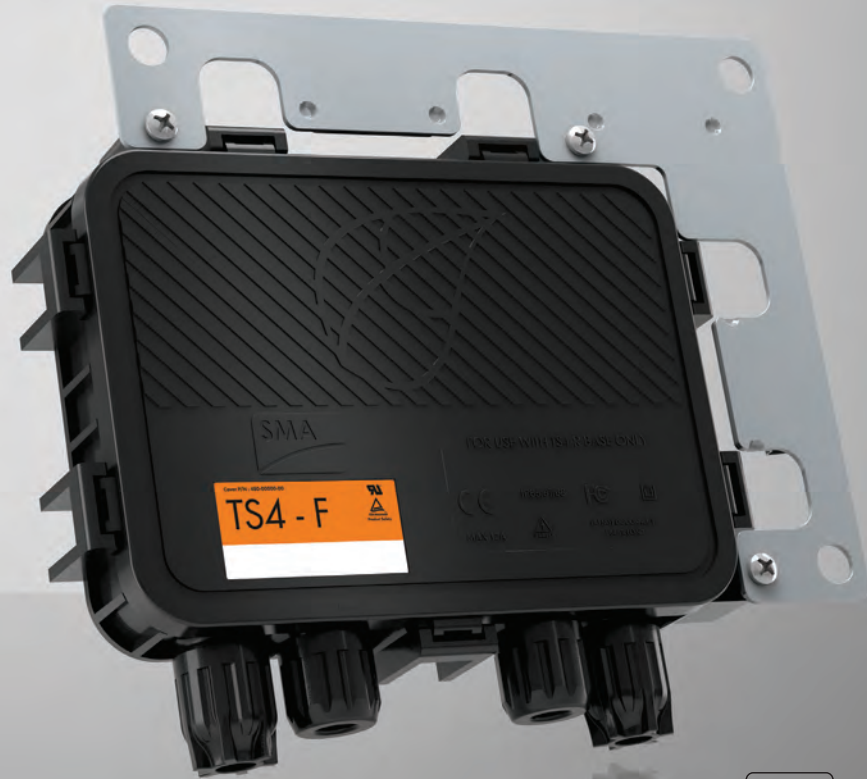

Cost-effective

- Simple to install via existing DC wires
- No additional components necessary, reducing balance of system costs

Simple and robust

- Power line based communication compatible with SunSpec signal for rapid shutdown
- Shuts down PV module whenever SunSpec signal is interrupted

Safe and reliable

- SunSpec compliant rapid shutdown that fulfills:
 - › UL 1741
 - › NEC 2014
 - › NEC 2017

Reduced risk


- Technical support from SMA's #1 ranked service organization
- Simple, safe repair or replacement of proprietary snap-in cover—no cabling work

TS4-R-F SUNSPEC RAPID SHUTDOWN

Compliance made simple and economical

The new TS4-R-F rapid shutdown solution is a cost-effective way to fulfill UL 1741, NEC 2014 and NEC 2017 requirements. It is compatible with the power line based SunSpec communication signal for rapid shutdown, making it simple to implement with robust functionality. Using the existing DC wires between the inverter and module-level electronics as a communication channel significantly reduces installation time and labor costs, since no additional communication equipment is needed. The TS4-R-F's compliance with the SunSpec open standard makes it the most flexible solution on the market, as it can be combined with multiple types of inverters.

Technical data	TS4-R-F 478-00252-42
Input	
Rated DC input power	475 W
Maximum PV module open circuit voltage @ STC	75 V
Maximum input voltage	90 V
Maximum current I _{sc}	12 A
Output	
Output power range	0 - 475 W
Output voltage range	0 - V _{oc}
Communication type	SunSpec Rapid Shutdown
Rapid shutdown compliant (NEC 2017 690.12)	Yes
Maximum system voltage	1000 V
Maximum series fuse rating	15 A
Mechanical	
Operating temperature range	-40°C to +85°C (-40°F to +185°F)
Non-operating temperature range	-40°C to +85°C (-40°F to +185°F)
Cooling method	Natural convection
Dimensions with cover	152.5 mm x 108 mm x 25.3 mm
Weight with cover	610 g
Environmental rating	IP68, NEMA 4X
Cabling	
Cabling type / Output cable length	H1Z2Z2-K / 1.2 m (solar cable, certified to EN 50618)
Cabling	MC4
UV resistance	500 hr with UVB light between 300 and 400 nm at 65° C
Type designation	TS4-R-F 478-00252-42

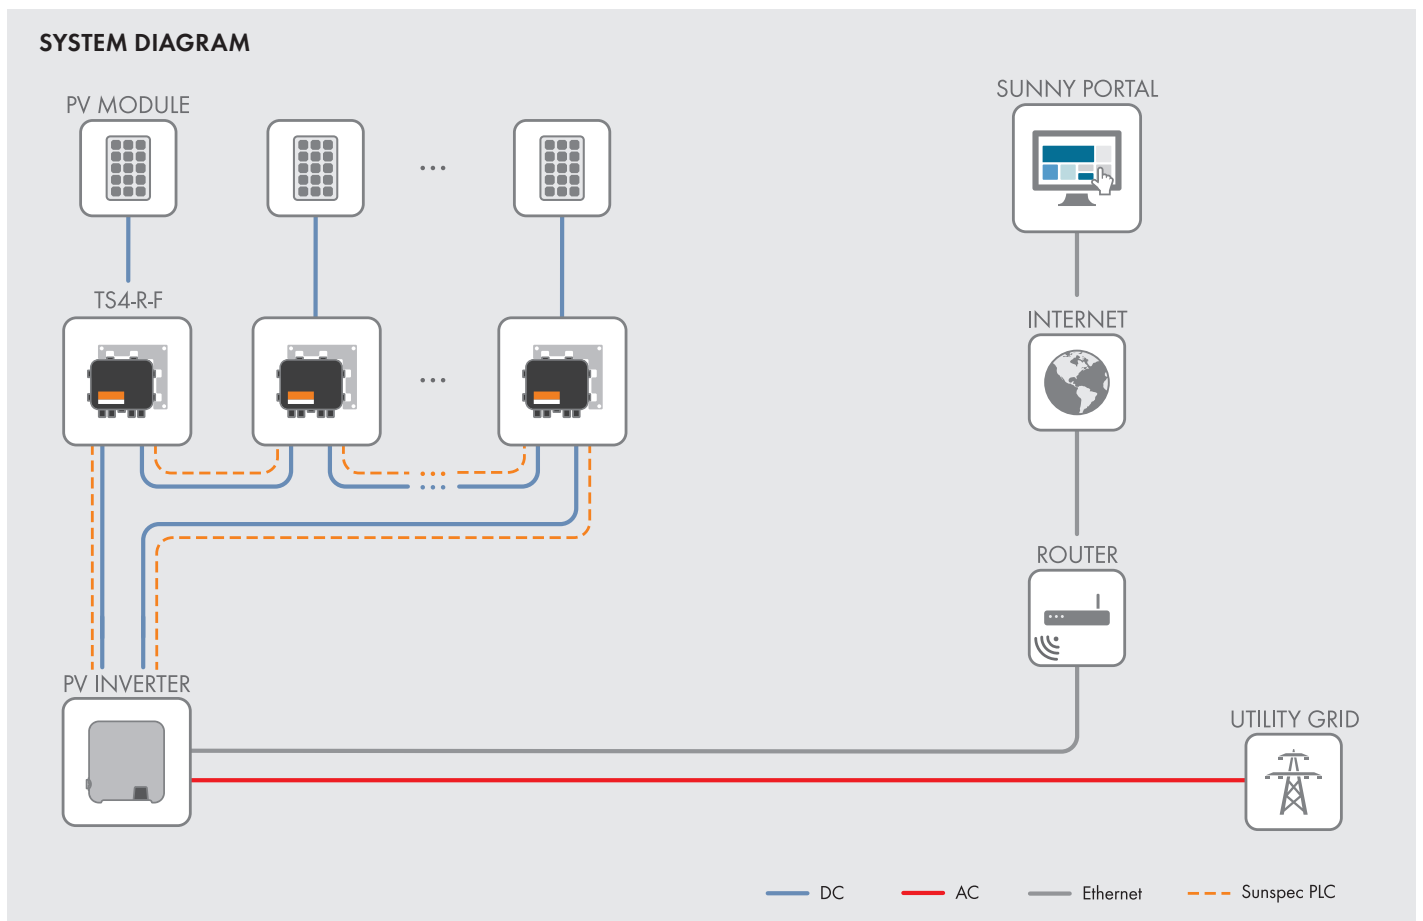

SUNNY BOY 3.0-US / 3.8-US / 5.0-US / 6.0-US / 7.0-US / 7.7-US



SB3.0-1SP-US-41 / SB3.8-1SP-US-41 / SB5.0-1SP-US-41 / SB6.0-1SP-US-41 / SB7.0-1SP-US-41 / SB7.7-1SP-US-41 / SB3.0-1TP-US-41 / SB3.8-1TP-US-41 / SB5.0-1TP-US-41 / SB6.0-1TP-US-41 / SB7.0-1TP-US-41 / SB7.7-1TP-US-41



Value-Added Improvements

- SunSpec certified technology for cost-effective module-level shutdown
- Advanced AFCI compliant to UL 1699B for arc fault protection

Reduced Labor

- New Installation Assistant with direct access via smartphone minimizes time in the field
- Advanced communication interface with fewer components creates 50% faster setup and commissioning

Optimized Power Production

- ShadeFix, SMA's proprietary shade management solution, produces more power than alternatives
- Reduced component count provides maximum system reliability

Trouble-Free Service

- SMA Service Mobile App provides simplified, expedited field service
- Equipped with SMA Smart Connected, a proactive service solution that is integrated into Sunny Portal

SUNNY BOY 3.0-US / 3.8-US / 5.0-US / 6.0-US / 7.0-US / 7.7-US

Power with a purpose

The residential PV market is changing rapidly. Your bottom line matters more than ever—so we've designed a superior residential solution to help you decrease costs at every stage of your business operations. The Sunny Boy 3.0-US/3.8-US/5.0-US/6.0-US/7.0-US/7.7-US join the SMA lineup of field-proven solar technology backed by the world's #1 service team. This improved residential solution features ShadeFix, SMA's proprietary technology that optimizes system performance. ShadeFix also provides superior power production with a reduced component count versus competitors, which provides maximum reliability. No other optimized solution generates more power or is as easy as systems featuring SMA ShadeFix and SunSpec certified devices. Finally, SMA Smart Connected will automatically detect errors and initiate the repair and replacement process so that installers can reduce service calls and save time and money.

www.SMA-America.com

Technical data	Sunny Boy 6.0-US		Sunny Boy 7.0-US		Sunny Boy 7.7-US	
	208 V	240 V	208 V	240 V	208 V	240 V
Input (DC)						
Max. PV power	9600 Wp		11200 Wp		12320 Wp	
Max. DC Voltage			600 V			
Rated MPP Voltage range	220 - 480 V		245 - 480 V		270 - 480 V	
MPPT operating voltage range			100 - 550 V			
Min. DC voltage / start voltage			100 V / 125 V			
Max. operating input current per MPPT			10 A			
Max. short circuit current per MPPT			18 A			
Number of MPPT tracker / string per MPPT tracker			3 / 1			
Output (AC)						
AC nominal power	5200 W	6000 W	6660 W	7000 W	6660 W	7680 W
Max. AC apparent power	5200 VA	6000 VA	6660 VA	7000 VA	6660 VA	7680 VA
Nominal voltage / adjustable	208 V / ●	240 V / ●	208 V / ●	240 V / ●	208 V / ●	240 V / ●
AC voltage range	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V
AC grid frequency	60 Hz / 50 Hz					
Max. output current	25.0 A	25.0 A	32.0 A	29.2 A	32.0 A	32.0 A
Power factor (cos φ) / harmonics	1 / < 4 %					
Output phases / line connections	1 / 2					
Efficiency						
Max. efficiency	97.3 %	97.7 %	97.3 %	97.9 %	97.3 %	97.5 %
CEC efficiency	96.5 %	97.0 %	96.5 %	97.0 %	96.5 %	97.0 %
Protection devices						
DC disconnect device / DC reverse polarity protection			● / ●			
Ground fault monitoring / Grid monitoring			●			
AC short circuit protection			●			
All-pole sensitive residual current monitoring unit (RCMU)			●			
Arc fault circuit interrupter (AFCI)			●			
Protection class / overvoltage category			I / IV			
General data						
Dimensions (W / H / D) in mm (in)			535 x 730 x 198 (21.1 x 28.5 x 7.8)			
Packaging Dimensions (W / H / D) in mm (in)			600 x 800 x 300 (23.6 x 31.5 x 11.8)			
Weight / packaging weight			26 kg (57 lb) / 30 kg (66 lb)			
Temperature range: operating / non-operating			-25 °C ...+60 °C / -40 °C ...+60 °C			
Environmental protection rating			NEMA 3R			
Noise emission (typical)	39 dB(A)				45 dB(A)	
Internal power consumption at night			< 5 W			
Topology / cooling concept	transformerless / convection				transformerless / fan	
Features						
Ethernet ports			2			
Secure Power Supply			●*			
Display (2 x 16 characters)			●			
2.4 GHz WLAN / External WLAN antenna			●/○			
ShadeFix technology for string level optimization			●			
Cellular (4G / 3G) / Revenue Grade Meter			○/○**			
Warranty: 10 / 15 / 20 years ***			●/○/○			
Certificates and approvals	UL 1741, UL 1741 SA incl. CA Rule 21 RSD, UL 1998, UL 1699B Ed. 1, IEEE1547, FCC Part 15 (Class A & B), CAN/CSA V22.2 107.1-1, HECO Rule 14H, PV Rapid Shutdown System Equipment					
● Standard features ○ Optional features – Not available						
NOTE: US inverters ship with gray lids. Data at nominal conditions * Not compatible with SunSpec shutdown devices **Standard in SBX.X-1TP-US-41						
Type designation	SB6.0-1SP-US-41 / SB6.0-1TP-US-41		SB7.0-1SP-US-41 / SB7.0-1TP-US-41		SB7.7-1SP-US-41 / SB7.7-1TP-US-41	

POWER+ SOLUTION

The SMA Power+ Solution combines legendary SMA inverter performance and SunSpec certified shutdown devices in one cost-effective, comprehensive package. In addition, SMA ShadeFix technology optimizes power production and provides greater reliability than alternatives.

This rapid shutdown solution fulfills UL 1741, NEC 2014, and NEC 2017 requirements and is certified to the power line-based SunSpec Rapid Shutdown communication signal over DC wires, making it the most simple and cost-effective rapid shutdown solution on the market.

Visit www.SMA-America.com for more information.





SUNNY ISLAND 4548-US / 6048-US

SI4548-US-10 / SI6048-US-10



NOW COMPATIBLE WITH LITHIUM ION BATTERY SYSTEMS



Efficient

- CEC efficiency of 94.5% and 94%
- State of charge calculation
- Intelligent battery management for maximum battery life
- Now supports external BMS and lithium-ion technology

Simple

- Easy commissioning with the "Quick Configuration Guide"
- Complete off-grid management
- Excellent for grid-tied battery back up

Flexible

- For Sunny Island systems from 4.5 to 100 kW
- Single, split-phase and three-phase operation, connectable in parallel and modularly expandable
- AC and DC coupling

Durable



- Extreme overload capability
- OptiCool™ active temperature management system
- 5-year standard warranty

SUNNY ISLAND 4548-US / 6048-US

The efficient off-grid manager

The SMA Sunny Island 4548-US and 6048-US inverters are based on proven off-grid technology and feature industry leading power output. A maximum efficiency of 96 percent ensures peak production, which results in reduced diesel usage in rural communities. More flexible sizing allows for simplified system planning. And, with multicluster technology, up to 12 Sunny Islands can be integrated into off-grid power systems up 110 kW in size.

Technical data	Sunny Island 4548-US	Sunny Island 6048-US
AC output (loads)		
Rated grid voltage / AC voltage range	120 V/105 V - 132 V	120 V/105 V - 132 V
Rated frequency / frequency range (adjustable)	60 Hz/55 Hz ... 65 Hz	60 Hz/55 Hz ... 65 Hz
AC power (at 25 °C / at 40 °C) for 3 hours	5000 W/4000 W	6000 W/5000 W
Rated power (@ U_{nom} , f_{nom} / 25 °C / @ $\cos \varphi = 1$)	4500 W	5750 W
AC power at 25 °C for 30 min / 1 min / 3 s	5300 W / 8400 W / 11000 W	7000 W / 8400 W / 11000 W
Rated current / max. output current (peak)	37.5 A/180 A for approx. 60 ms	48 A/180 A for approx. 60 ms
Total harmonic factor output voltage / power factor with rated power	3 % / -1 ... +1	3 % / -1 ... +1
AC input (PV array or grid)		
Rated input voltage / AC input voltage range	120 V/80 V - 150 V	120 V/80 V - 150 V
Rated input frequency / allowable input frequency range	60 Hz/54 Hz ... 66 Hz	60 Hz/54 Hz ... 66 Hz
Max. AC input current / adjustable	56 A/0 A ... 56 A	56 A/0 A ... 56 A
Max. AC input power	6.7 kW	6.7 kW
Battery DC input		
Rated input voltage / DC voltage range	48 V/41 V - 63 V	48 V/41 V - 63 V
Max. battery charging current / DC rated charging current	100 A / 85 A	130 A / 110 A
Battery type / battery capacity range	Lead, NiCd, Li-ion / 100 Ah ... 10000 Ah	Lead, NiCd, Li-ion / 100 Ah ... 10000 Ah
External BMS compatible	●	●
Charge control	IUoU charge procedure with automatic full charge and equalization charge	IUoU charge procedure with automatic full charge and equalization charge
Efficiency / self-consumption		
Max. efficiency / CEC efficiency	96 % / 94.5 %	96 % / 94 %
Self-consumption without load / standby	25 W/4 W	25 W/4 W
Protective devices		
DC reverse polarity protection / DC fuse	● / ●	● / ●
AC short-circuit / AC overload	● / ●	● / ●
Overtemperature / battery deep discharge	● / ●	● / ●
General data		
Dimensions (W / H / D)	467 / 612 / 235 mm (18.4 / 24.1 / 9.3 inch)	467 / 612 / 235 mm (18.4 / 24.1 / 9.3 inch)
Weight	63 kg / 139 lb	63 kg / 139 lb
Operating temperature range	-25 °C ... +60 °C / -13 °F ... +122 °F	-25 °C ... +60 °C / -13 °F ... +122 °F
Features / function		
Operation and display / multi-function relay	Internal / 2	Internal / 2
Degree of protection (according to IEC 60529)	indoors (NEMA 1)	indoors (NEMA 1)
Three-phase systems / parallel connection	● / ●	● / ●
Integrated bypass / multicluster operation	- / ●	- / ●
State of charge calculation / full charge / equalization charge	● / ● / ●	● / ● / ●
Integrated soft start / generator support	● / ●	● / ●
Battery temperature sensor / data cable	● / ●	● / ●
Warranty	5 years	5 years
Certificates and approvals	www.SMA-Solar.com	www.SMA-Solar.com
Accessories		
Battery cable / battery fuse	○ / ○	○ / ○
Interface (RS 485 / Multicluster PB)	○ / ○	○ / ○
Extended generator start "GenMan"	○	○
Load-shedding protection / battery current measurement	○ / ○	○ / ○
● Standard feature ○ Optional feature - Not available		
Type designation	SI4548-US-10	SI6048-US-10

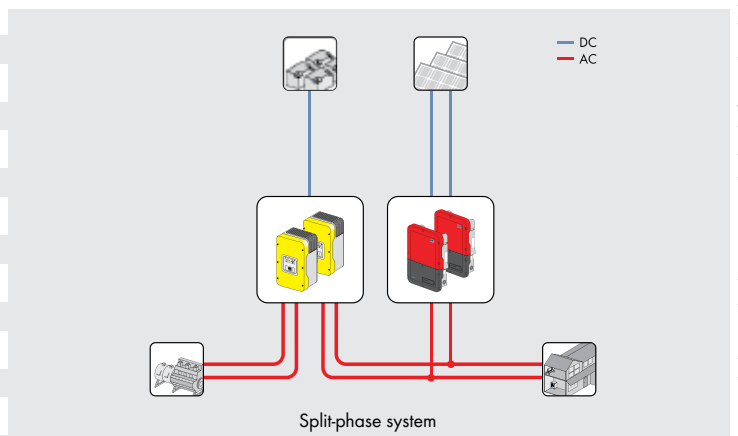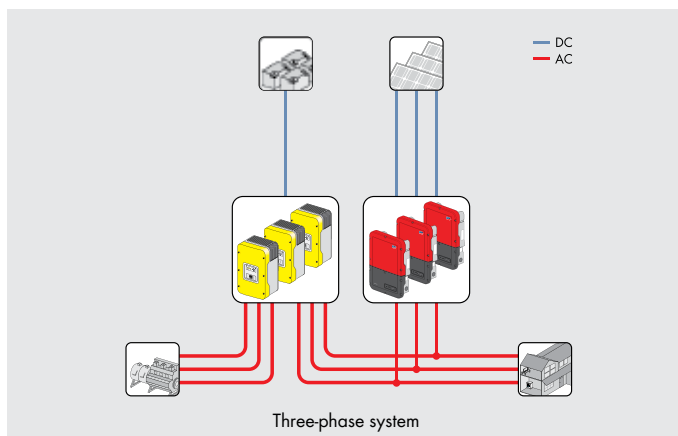



DC400-6 DEEP CYCLE

400AH @ 20Hr
6-Volt

Group Size: L16 / 903

Maintenance-Free
Sealed AGM Battery

CYCLING CAPACITY

20 Hour Rate **415 Amp Hours**

RESERVE CAPACITY

Reserve @25 AMPS **885 Minutes** Reserve @75 AMPS **229 Minutes**

ELECTRICAL SPECIFICATIONS

Nominal Voltage	6 Volt
C100	460AH
C20	415AH
C10	374AH
C5	340AH
CCA	1500
CA or MCA	1800
HPCA	2000 Amps
Internal Resistance	1.6m Ω


MECHANICAL SPECIFICATIONS

Group Size	L16 / 903	
Terminal Type	DTW	
Terminal Torque	See reverse side	
Height (w/ terminal)	16.69"	424mm
Height (case only)	15.90"	404mm
Width	7.05"	179mm
Length	11.61"	295mm
Weight	123.2 lbs.	56 kg
Case Type	ABS Plastic - Flame Res. Rating UL94-HB	

DISCHARGE TABLE (Constant Current)

Time	Amps	Rate
20hr	20.8	0.05CA
10hr	37.4	0.10CA
8hr	45.1	0.13CA
5hr	68.0	0.25CA
3hr	93.9	0.33CA
2hr	123	0.50CA
1hr	232	1.00CA



DISCHARGE PROFILE (Constant Current)

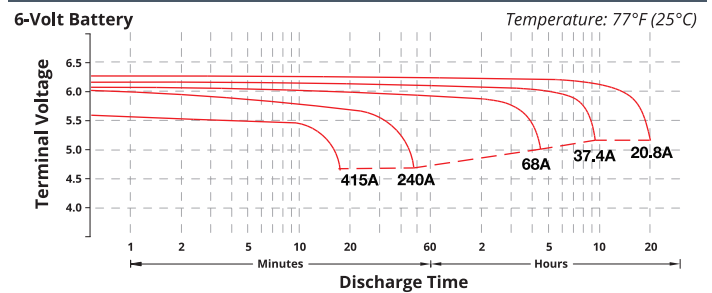

- All listed ratings are @ 100% SoC, T=77°F (25°C), 1.75VPC unless otherwise specified.


- Specifications listed are for estimation purposes only. Battery performance can vary depending on application. Battery design subject to change.

BATTERY & TERMINAL DIMENSIONS (All units shown in mm)

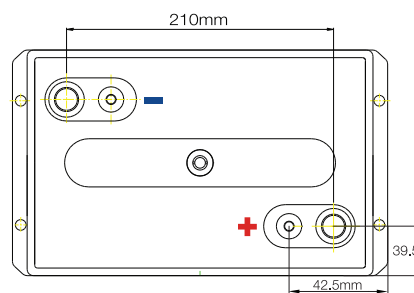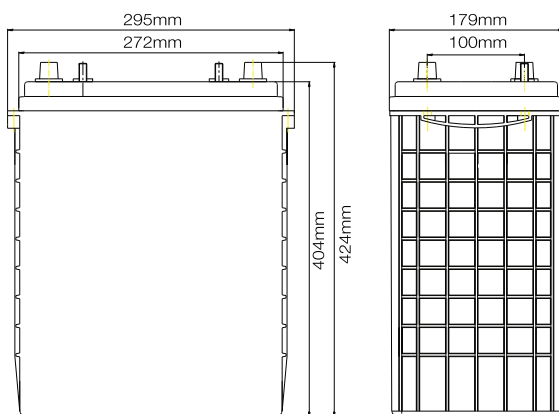

Battery bank spacing required,
12.5mm (1/2" inch) minimum


Terminal: DTW (Dual AP & Stud)

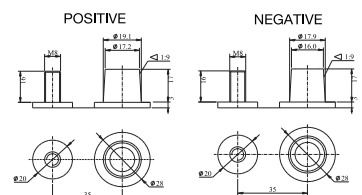


(unit: mm)



TEMPERATURE vs CAPACITY

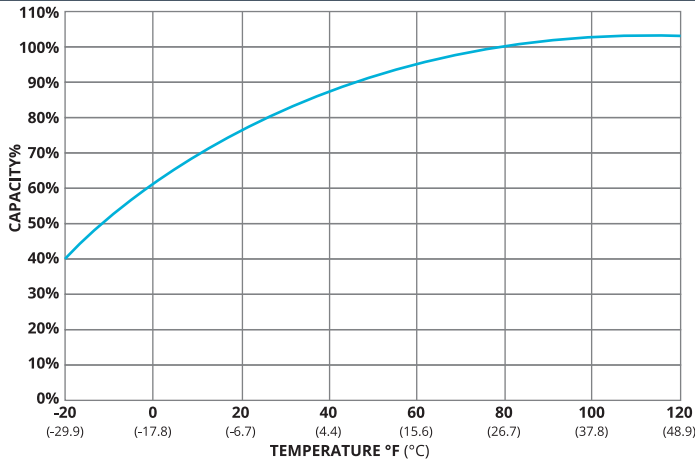


STATE of CHARGE (SOC) vs OPEN CIRCUIT VOLTAGE (OCV)

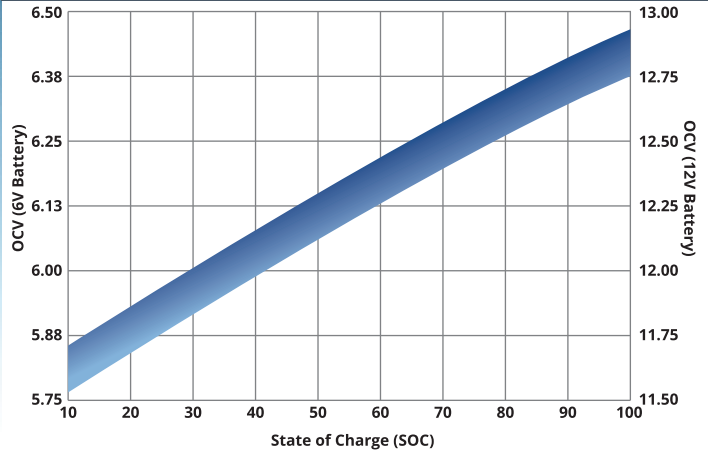


CYCLE LIFE vs DEPTH of DISCHARGE (DOD)

*(Based on BCI Testing @ 2-hr Rate)

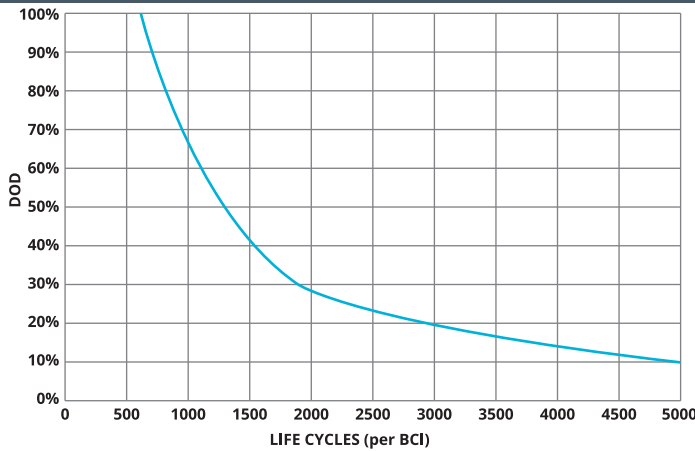

SELF DISCHARGE vs TIME/TEMPERATURE

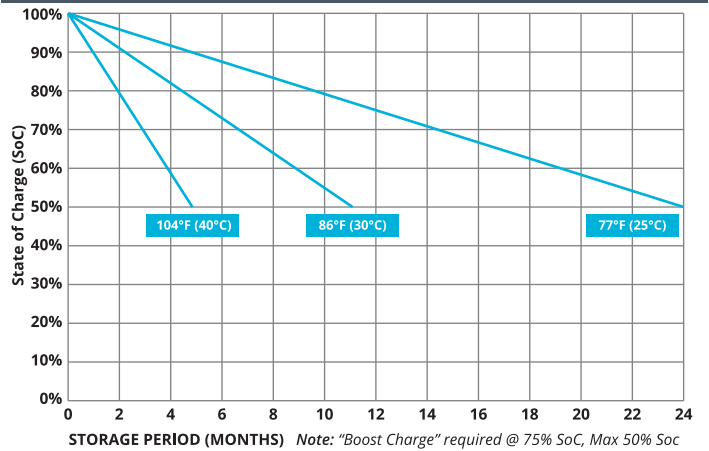

TEMPERATURE RANGE SPECIFICATIONS

Condition	Recommended	Maximum	Recommended	Maximum
Storage	5°F to 122°F	-40°F to 160°F	-15°C to 50°C	-40°C to 71°C
Operation	5°F to 104°F	-40°F to 160°F	-15°C to 40°C	-40°C to 71°C
Charge with TC	5°F to 122°F	-40°F to 160°F	-15°C to 50°C	-40°C to 71°C
Charge w/o TC	32°F to 104°F	5°F to 122°F	0°C to 40°C	-15°C to 50°C

*TC= Temperature Compensation

CHARGE VOLTAGES

Charge Stage	Battery Voltages			
	12V	24V	36V	48V
Bulk	14.7V	29.4V	44.1V	58.8V
Absorption	14.7V	29.4V	44.1V	58.8V
Float	13.6V	27.2V	40.8V	54.6V

TC Factor: (-2mV°F/cell) or (-4mV°C/cell)

TERMINAL TORQUE SPECS

Terminal Type	ft-lbs	in-lbs	Nm
AP, DT (AP), M6, M6M (Stud), TP07 (AP), TP08 (AP)	4.2 - 6.0	50-70	5.6 - 7.9
FR45	6.0 - 7.5	70-90	7.9 - 10.1
M8	7.1 - 8.0	85-95	9.6 - 10.7
DT (Stud), M10M (Stud)	9.2 - 10.4	110-125	12.2 - 14




9001:2008 Quality Management System
 14001:2004 Environmental Management System
 18001:2007 Occupational Health & Safety Management System



DELIVERY APPROVED!
**LAND, SEA
 & AIR**

Fullriver batteries are sealed lead acid batteries made with Absorbed Glass Mat (AGM) technology. The electrolyte is absorbed into the fiberglass separator material rather than in a free-flowing liquid form. Fullriver batteries are non-spillable electric storage batteries. They are excepted from the requirements of DOT's hazardous materials regulations, since they adhere to the requirements of code 49 CFR Section 173.159(D) - (CLASSIFIED APPROVED: DOT, CFR, HMR49, IATA, ICAO67, IMDG27)



L-Mount® Series

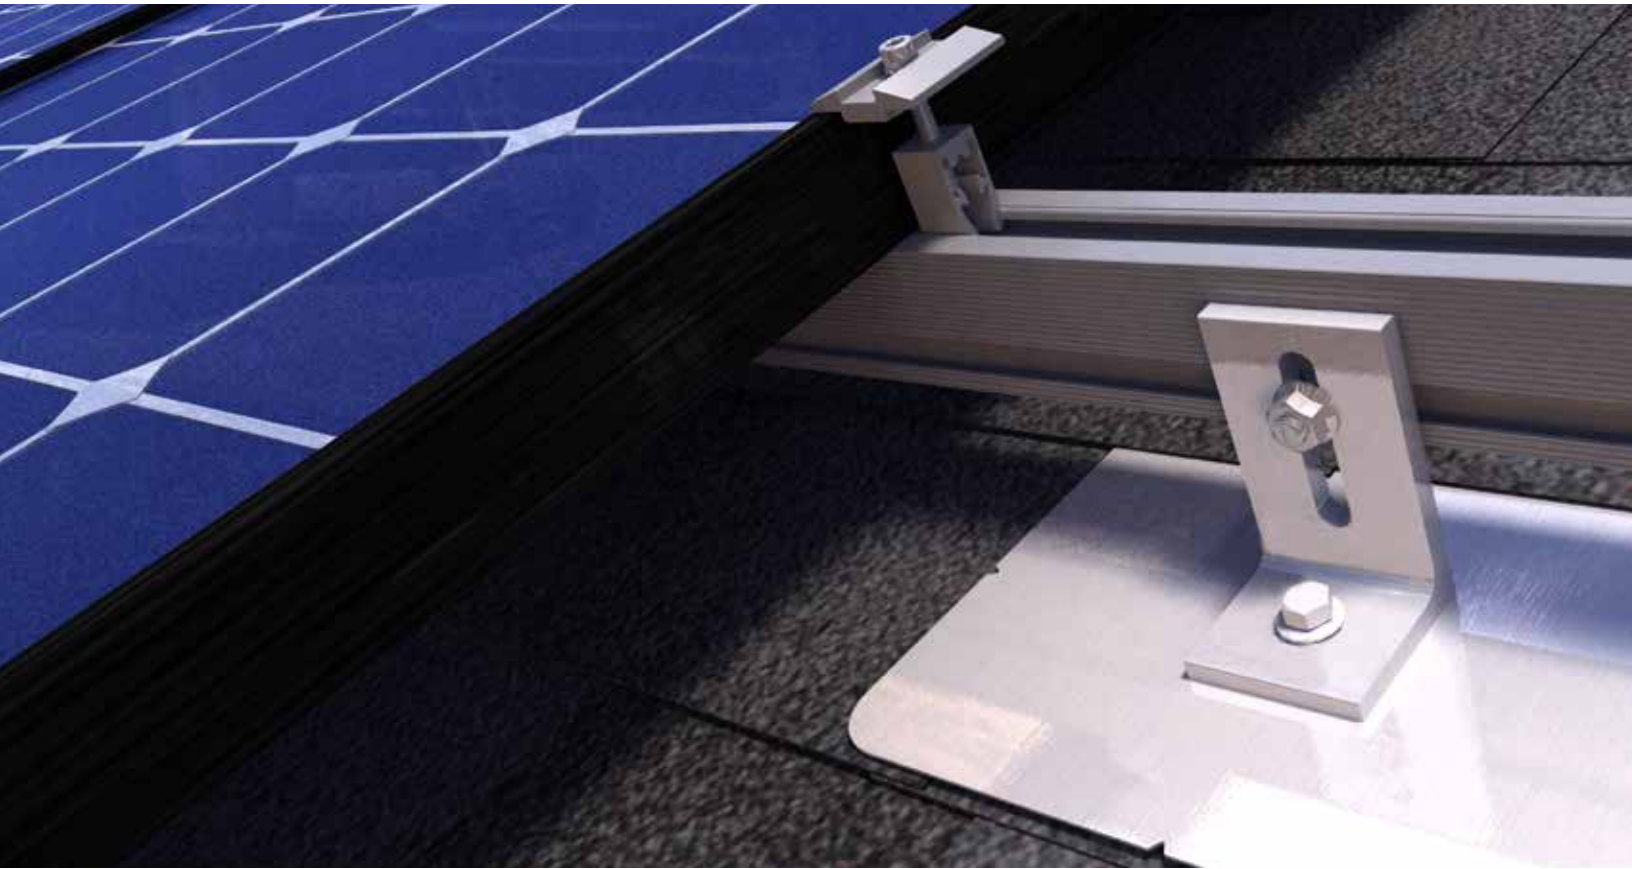

The L-Mount® Series is designed for cost-effective, one-bolt installation onto existing composition/asphalt shingle roofs. Quick Mount PV engineered its patented Elevated Water Seal Technology® into an integrated L-foot and flashing for super-fast, single-lag bolt installation with unparalleled waterproofing. The L-Mount comes with a lag bolt or structural screw for attachment versatility and works with all leading racks. The L-Mount features a 9" x 12" aluminum flashing with alignment guides and rounded corners to easily slide under shingles and speed installation on the roof.

FEATURES




- L-foot can be rotated 360 degree for optimal adjustability
- Works with all leading racks
- Available with lag bolt or structural screw
- QBlock® Elevated Water Seal Technology®
- Single bolt installation, no shingle cutting
- 9" x 12" aluminum flashing
- Meets or exceeds roofing industry best practices; 100% IBC compliant
- 18-8 stainless steel hardware included
- Alignment guides
- 25-year warranty

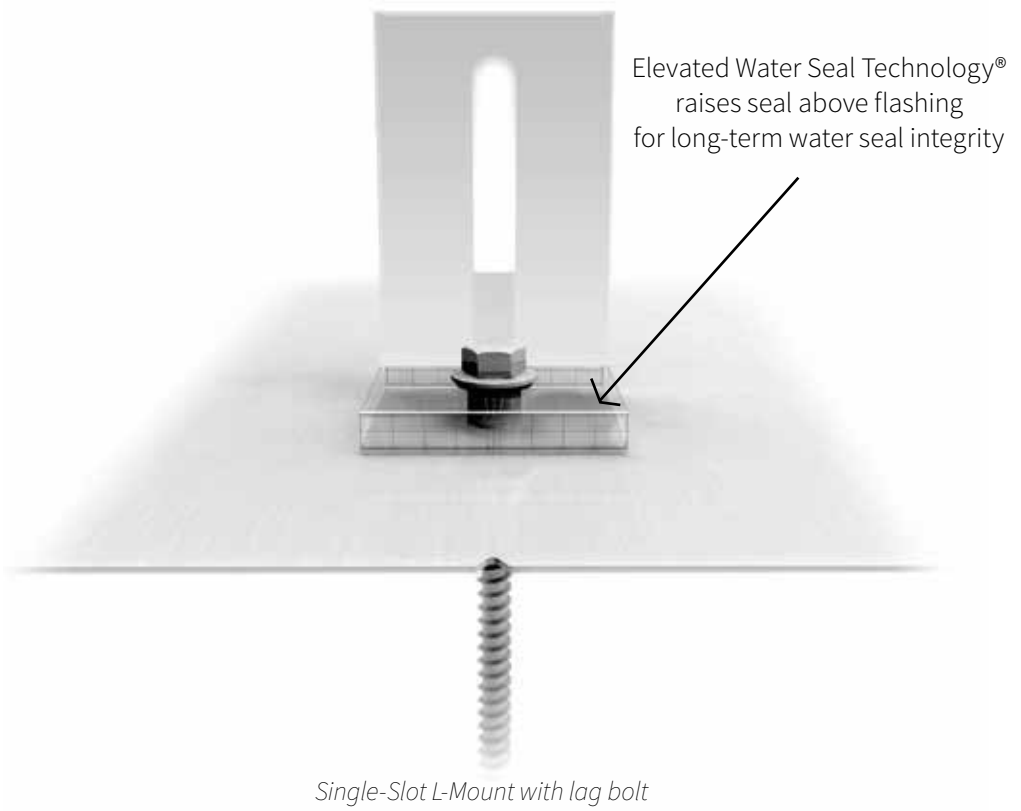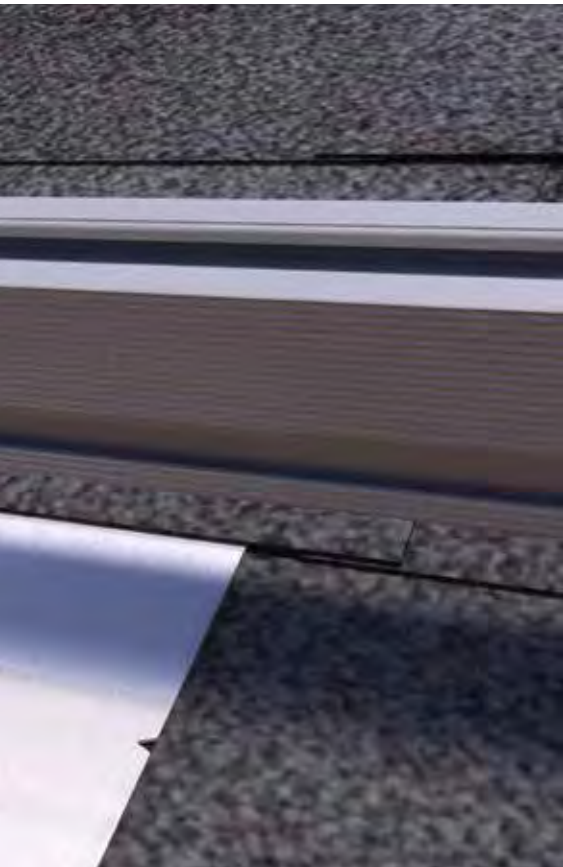

SINGLE-SLOT L-MOUNT

Available finishes:
aluminum mill (A); black (B)

Mounting systems for solar technology

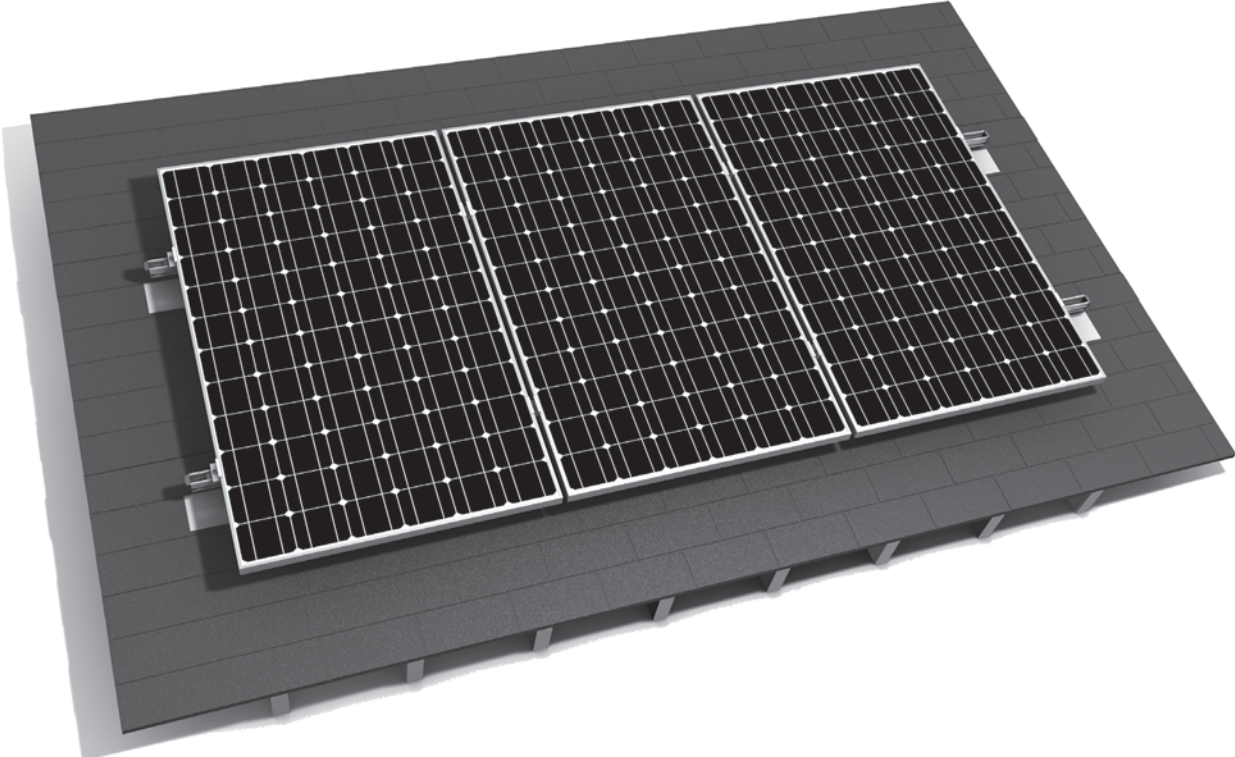

EVEREST SOLAR SYSTEMS
RESIDENTIAL ROOF SOLUTIONS
CROSSRAIL SYSTEM

Everest Solar Systems, LLC
3809 Ocean Ranch Blvd., Suite 111
Oceanside, CA 92056
Service-Hotline +1.760.301.5300
info@everest-solarsystems.com
www.everest-solarsystems.com


CROSSRAIL SYSTEM




- ▶ High quality, German-engineered system optimized for residential installation
- ▶ MK3 mounting hardware simplifies module installation – fast, easy, and secure
- ▶ Easily integrates with third party roof attachment products
- ▶ L-foot provides adjustability and compatibility with common roof types
- ▶ 100% code-compliant, structural validation for all solar states
- ▶ Three rail sizes available to suit all structural conditions
- ▶ Most components also available in dark
- ▶ Fast installation with minimal component count result in low total installed cost
- ▶ Simple to design using code compliant Everest Online Design Tool
- ▶ Use two innovative components to turn this system into Shared Rail or Tilt Up

TECHNICAL DATA

Applicable roof types	Composition shingle, tile, flat tile
Flexibility	Modular construction, suitable for any system size, height adjustable
PV modules	For all common module types
Module orientation	Portrait and landscape
Material	High corrosion resistance, stainless steel and high grade aluminum
Roof attachment	Screw connection into rafter
Structural validity	IBC compliant, stamped engineering letters available for all solar states
Warranty	20 years
System components	CrossRail 48-X/48-XL/80, L-Foot, Mid and End Clamp Sets

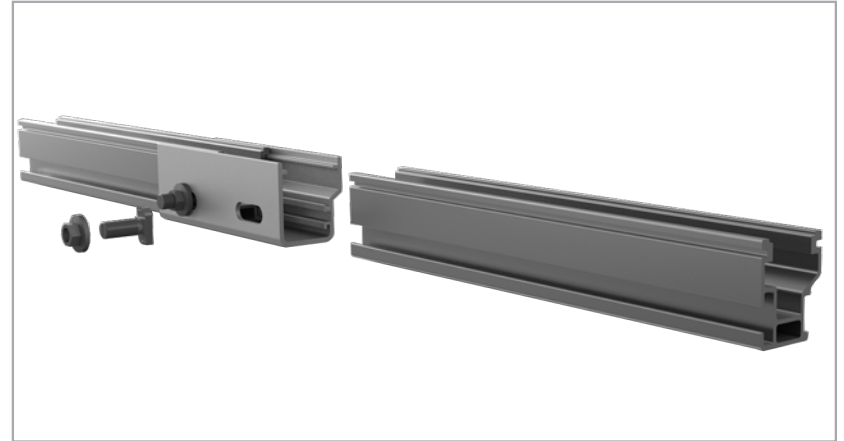

CrossRail Structural Splice

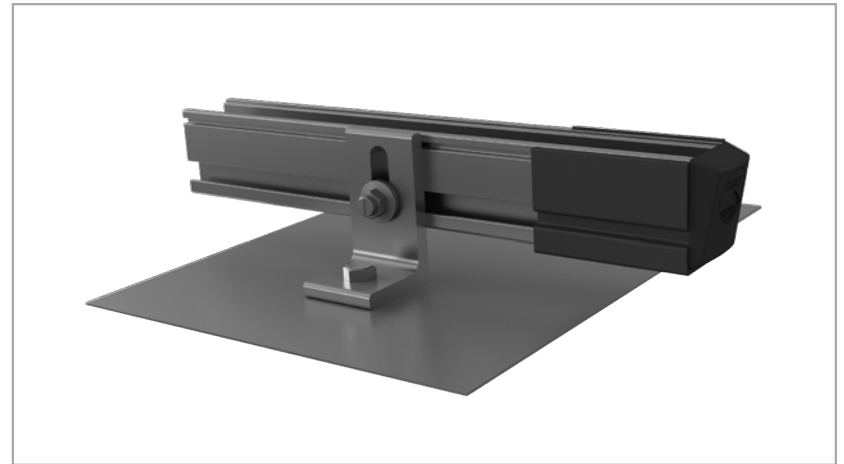

CrossRail with EverFlash, Rail Sleeve and End Cap



Bonding Mid Clamp | End Clamp | Micro, Optimizer & Accs Mounting Kit