


**GENERAC**  
**PV Link / S2502**  
SnapRS™ compatible sub-systeming optimizer  
PV rapid shutdown system equipment

Input:  
Max 420V  
SINGLE STRING INPUT  
Dual string input requires approval.

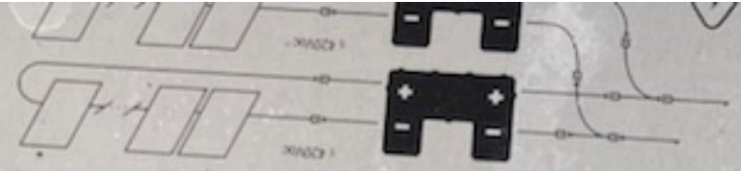

IMPORTANT INSTALLATION INSTRUCTIONS:

PVRS Controlled Conductor C  
Refer to instructions for cond



**REbus DC Nar**  
**OUTPUT**

RCP: 00010013285F  
S/N: S2502-76323  
MFG: B  
Date: Q1-21



ENCLOSURE MUST BE GROUNDED  
for REbus communication

Input:  
Max 420V  
SINGLE ST

INSTALLATION INSTRUCTIONS:

Snaps™ compatible sub  
PV rapid shutdown system  
PV Link /

GENERATOR

PVRS  
Ref R



PEEL  
RCP: 0001001329F3  
S/N: S2502-76727  
MFG: B  
Date: Q1-21

OSURE MUST BE GROUNDED  
s communication





