



Plan Review, Inspection, and Permit Fees


Application Number : 18-50043529

\$100.00	<input type="checkbox"/>	DRB Major Sub Division Prelim Site Plans	\$	-
\$200.00	<input type="checkbox"/>	Explosive Material (90 Days)	\$	-
\$100.00	<input type="checkbox"/>	Explosive Materials (72 Hours)	\$	-
\$100.00	<input type="checkbox"/>	Fireworks Public Display	\$	-
\$50.00	<input checked="" type="checkbox"/>	Final Inspection	\$	50.00
\$35.00 + \$2.00 per device	<input type="checkbox"/>	Fire Alarm Testing	\$	-
\$35.00 + \$2.00 per nozzle	<input type="checkbox"/>	Fixed Fire Suppression	\$	-
\$75.00	<input type="checkbox"/>	Insecticide Fog/Fumigation	\$	-
\$100.00	<input type="checkbox"/>	Pipe Test/UST/AGST	\$	-
\$50.00	<input checked="" type="checkbox"/>	Plans up to 5000 sq ft	\$	50.00
\$100.00	<input type="checkbox"/>	Plans 5001 sq ft to 10,000 sq ft	\$	-
\$150.00	<input type="checkbox"/>	Plans 10,001 sq ft to 25,000 sq ft	\$	-
\$250.00	<input type="checkbox"/>	Plans 25,001 sq ft and over	\$	-
\$35.00 + 2.00 per head	<input type="checkbox"/>	Sprinkler Certification Test	\$	-
\$50.00	<input type="checkbox"/>	Standpipe Testing	\$	-
\$50.00	<input type="checkbox"/>	Special Assembly (ie. amusement buildings, carnivals, fairs)	\$	-
\$75.00	<input type="checkbox"/>	Tents/Canopies/Air Supported Structure	\$	-
\$100.00	<input type="checkbox"/>	Tank Installation (charge for each tank)	\$	-
\$100.00	<input type="checkbox"/>	Tank Removal (charge for each tank)	\$	-
		Total Devices/Heads	\$	-
		Total Cost	\$	100.00

Code Enforcement Official

D. Banks Wallace

6/13/2018





Fire Marshal Division

June 13, 2018

Terri McNeill

Competitive Cycles
81 Hollies Pines Rd.
Broadway, NC 27505

Application Number 16-50037930

Mr. McNeill,


Thank you for submitting the plans for the Competitive Cycles. The plans have been carefully reviewed by a qualified code enforcement official to examine for full compliance with the North Carolina Fire Prevention Code and all other fire protection regulatory documents. There are some items that were found during the plan review process that need to be addressed before a final inspection of the new facility can be given. These items are outlined and described below.

- **505.1 Physical Address**
 - The physical address of the building shall be posted in a conspicuous place so that it can be seen on approach from the road, access road, and/or parking lot.
 - The numbers used to make up the physical address shall be at least 6 inches in height.

- **506.1 Knox Box**
 - A secure key box shall be installed on the new building that houses all keys to all the doors within the building in which the fire department would need access to in the event of an emergency.
 - Knox Box ID stickers shall be placed on all exterior doors in which entry to the building may be gained.
 - The box shall be mounted not to exceed 48 – 60 inches in height.
 - The basic model for the buildings should be at least a selection from the 3200 Series listed on the order form.

- **Fire Extinguishers**
 - Fire Extinguishers shall be 2A:10BC and shall be placed with a travel distance to not exceed 75'
 - Fire extinguishers are to be mounted no higher than 5' above the finished floor.





- **1006.1 Illumination Required**

- The exit discharge shall be illuminated at all times the building spaces served by the means of egress is occupied
- Illumination level in all areas of the means of egress shall not be less than 1 foot-candle at the walking surface and shall have emergency power supply.

Thank you again for submitting the plans for the Competitive Cycles. Please review the plans and adhere to any notes and alterations that were made in addition to the original drawings. These remarks are for the plans that were submitted and its original intent. These remarks do not apply if the original intent changes or what was submitted on the above date changes. If you have any questions, please do not hesitate to call this office

Again, thank you and we look forward to working with you during the construction period!

Sincerely,

D. Banks Wallace
Chief Deputy Fire Marshal

1000

1000

1000


1000

1000

1000

1000

1000

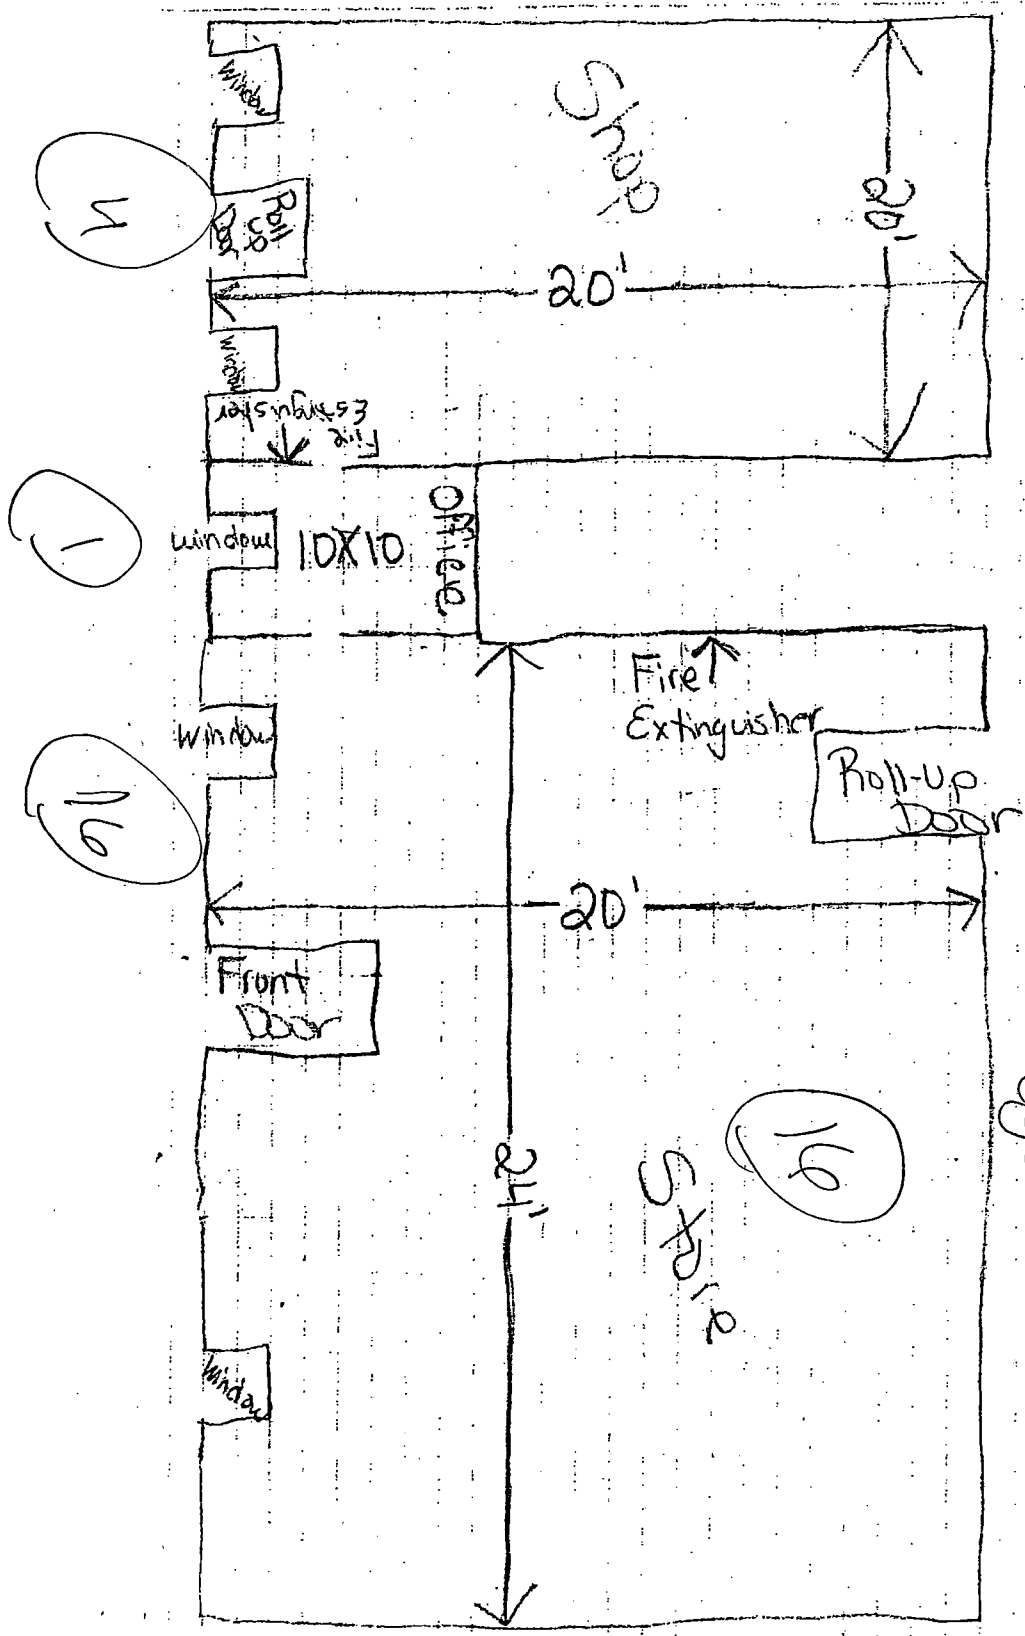

THIS SIGNATURE WAS
 IDENTIFIED AS STORAGE
 CUSTOMER WOULD WHO
 CYCLE SHOP. NO PERMITS



REPUBLIC OF THE PHILIPPINES
DEPARTMENT OF EDUCATION

OFFICE OF THE SECRETARY
EDUCATION HALL, PASAYEN CITY