

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Michael + Shelley Pearson PROPERTY LOCATION: 521412 Christian Light RD

NEW [] REPAIR [] EXPANSION [x] SUBDIVISION: MEIS MEADOW LOT # 47

Type of Structure: Ex SFD Site Improvements required prior to Construction Authorization Issuance:

Proposed Wastewater System Type: CONVENTIONAL

Projected Daily Flow: 366 -> 480 GPD

Number of bedrooms: 3 to 4 Number of Occupants: 8 max

Basement [] Yes [x] No Pump Required: [] Yes [x] No [] May be required based on final location and elevations of facilities

Type of Water Supply: [] Community [x] Public [] Well Distance from well _____ feet Permit valid for: [x] Five years

Permit conditions: ADDITION OF 50' OF DRAINLINE TO EACH EXISTING TRENCH PLUS FOOTAGE ADDED TO GET 5' OFF OF ADDITION OF 1 BEDROOM [] No expiration

Authorized State Agent: James E. Markham Date: 10-8-10 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Michael + Shelley Pearson PROPERTY LOCATION: 521412 Christian Light RD

Facility Type: Ex SFD [] New [x] Expansion [] Repair SUBDIVISION: Meis Meadow LOT # 47

Basement? [] Yes [x] No Basement Fixtures? [] Yes [x] No

Type of Wastewater System** Conventional (Initial) Wastewater Flow: 480 GPD

(See note below, if applicable [])

25% REDUCTION Bayston (Repair)

Installation Requirements/Conditions Number of trenches 2

Septic Tank Size Ex 1000 gallons Exact length of each trench 50 feet Trench Spacing: 9 Feet on Center

Pump Tank Size _____ gallons Trenches shall be installed on contour at a Soil Cover: 6 inches

Maximum Trench Depth of: 24" EXISTING inches (Maximum soil cover shall not exceed

(Trench bottoms shall be level to +/- 1/4" 36" above the trench bottom)

Pump Requirements: _____ ft. TDH vs. _____ GPM

Aggregate Depth: 6 inches below pipe

Conditions: 50' OF DRAINLINE TO EACH EXISTING DRAINLINE 2 inches above pipe

PLUS - THAT WAS TAKEN AWAY FROM OUTSIDE DITCH. 12 inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Markham Date: 10-8-10

Construction Authorization Expiration Date: 10-8-15

HTE# 10-5-2524912

Permit # 26085

Harnett County Department of Public Health Site Sketch

PROPERTY LOCATOR: SR1412 Christian Light RD

ISSUED TO: Michael + Shelley Pearson

SUBDIVISION Mels Meadow


LOT # 47

Authorized State Agent: James E. Marhart

Date: 10-8-10

- * ADD 50' OF DRAINAGE TO END OF EXISTING LINES
- * DO NOT DRIVE ON SYSTEM TO INSTALL OR ACCESS
- * TAKE FOOTAGE AT BEGINNING OF LINE CLOSEST TO ADDITION - CUT IT OFF TO CREATE 5' SETBACK AROUND ADDITION THEN ADD THAT AMOUNT TO END OF LINE .137

* DEMONSTRATE WHAT WAS LOST AT ADD AND END TO NEW BEGINNING OF THE 50'

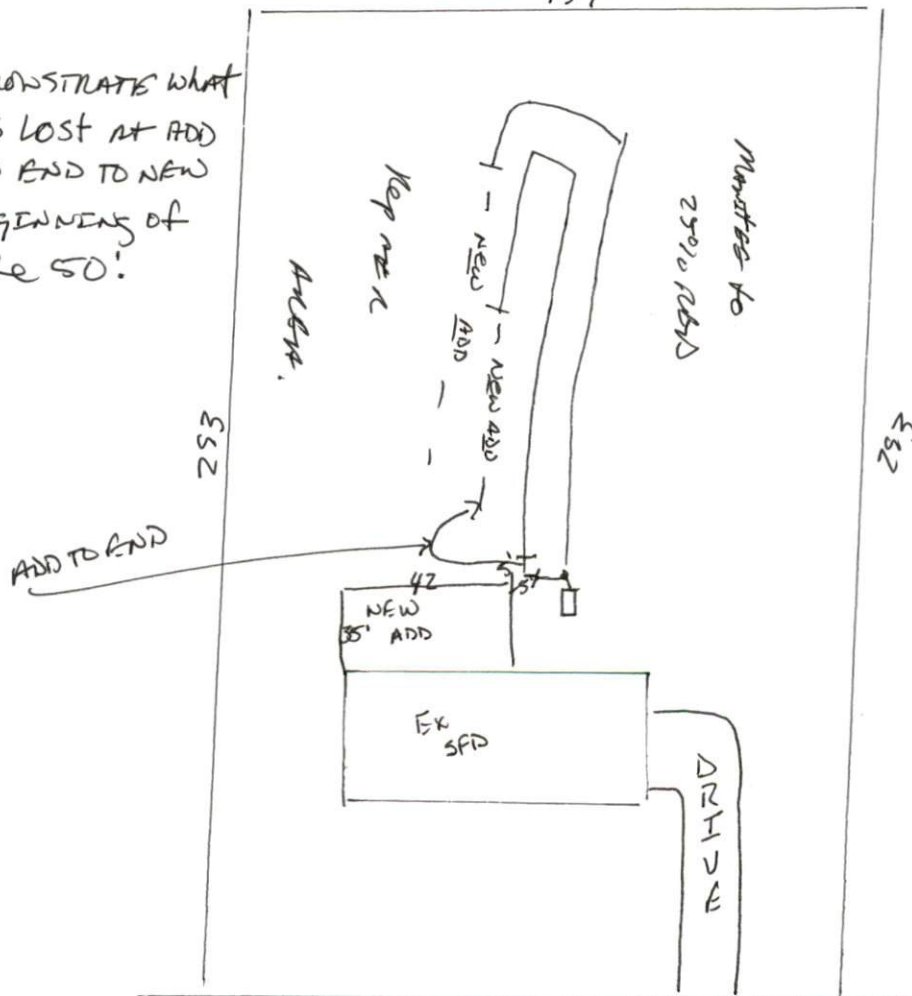

SR1412 Christian Light