

Initial Application Date: 09/07/2011

Appl # 24-500103110

808870

COUNTY OF HARNETT LAND USE APPLICATION

Central Permitting 102 E. Front Street, Lillington, NC 27546

Phone: (910) 893-4759

Fax: (910) 893-2793

LANDOWNER: Anderson Creek Day Care Mailing Address: 8227 Elliott Bridge Rd

City: Spring Lake State: NC Zip: 28390 Phone #: 910-491-2386

APPLICANT: Lambert Surveying Inc Mailing Address: 509 N Lincoln St

City: Benson State: NC Zip: 27504 Phone #: 919 894-3575

PROPERTY LOCATION: SR #: 2045 SR Name: Elliott Bridge Road

Address: 8227 Elliott Bridge Rd

Parcel: 010545 0014 PIN: 0534-50-780 S (uc)

Zoning: RA-20K Subdivision: _____ Lot #: _____ Lot Size: 8.98 Ac

Flood Plain: N/A Panel: 37085C01650 Watershed: N/A Deed Book/Page: 541/885 Plat Book/Page: 2004-640

DIRECTIONS TO THE PROPERTY FROM LILLINGTON: Take 401 S. to Bunnlevel, Turn right on SR 2030 at 11 Go 3 miles to McLean Chapel Church, 1/4 mile past church, take left on SR 2042, go to stop sign, turn left SR 2045, Go about 1/2 miles Daycare is on left before you get to Lower Little River

PROPOSED USE:

- Sg. Family Dwelling (Size ___ x ___) # of Bedrooms ___ # Baths ___ Basement (w/wo bath) ___ Garage ___ Deck ___
- Multi-Family Dwelling No. Units ___ No. Bedrooms/Unit ___
- Manufactured Home (Size ___ x ___) # of Bedrooms ___ Garage ___ Deck ___
- Number of persons per household _____
- Business Sq. Ft. Retail Space _____ Type _____
- Industry Sq. Ft. _____ Type _____
- Church Seating Capacity _____ Kitchen _____
- Home Occupation (Size ___ x ___) # Rooms _____ Use _____

IP - Hall

Additional Information: _____

Accessory Building (Size 130x70) Use Family Life Center *will be used by Day Care Center next door.*

Addition to Existing Building (Size ___ x ___) Use 74 kids 11 employees (425 sq ft)

Other Family Life Center 130x70 proposed building

Additional Information: _____

Water Supply: County Well (No. dwellings ___) Other _____

Sewage Supply: New Septic Tank Existing Septic Tank County Sewer Other _____

Erosion & Sedimentation Control Plan Required? YES NO

Property owner of this tract of land own land that contains a manufactured home w/in five hundred feet (500') of tract listed above? YES NO

Structures on this tract of land: Single family dwellings ___ Manufactured homes ___ Other (specify) Daycare

Required Residential Property Line Setbacks:	Minimum	Actual
Front	35	108'
Rear	25	235'
Side	10	205'
Corner	20	7'
Nearest Building	10	102'

#84 total both Center & Daycare

If permits are granted I agree to conform to all ordinances and the laws of the State of North Carolina regulating such work and the specifications or plans submitted. I hereby swear that the foregoing statements are accurate and correct to the best of my knowledge.

Carl Lambert
Signature of Owner or Owner's Agent

9-7-11
Date


This application expires 6 months from the initial date if no permits have been issued

A RECORDED SURVEY PLAT AND RECORDED DEED ARE REQUIRED WHEN APPLYING FOR A LAND USE APPLICATION

** Site Plan*

06/04

12/23 S

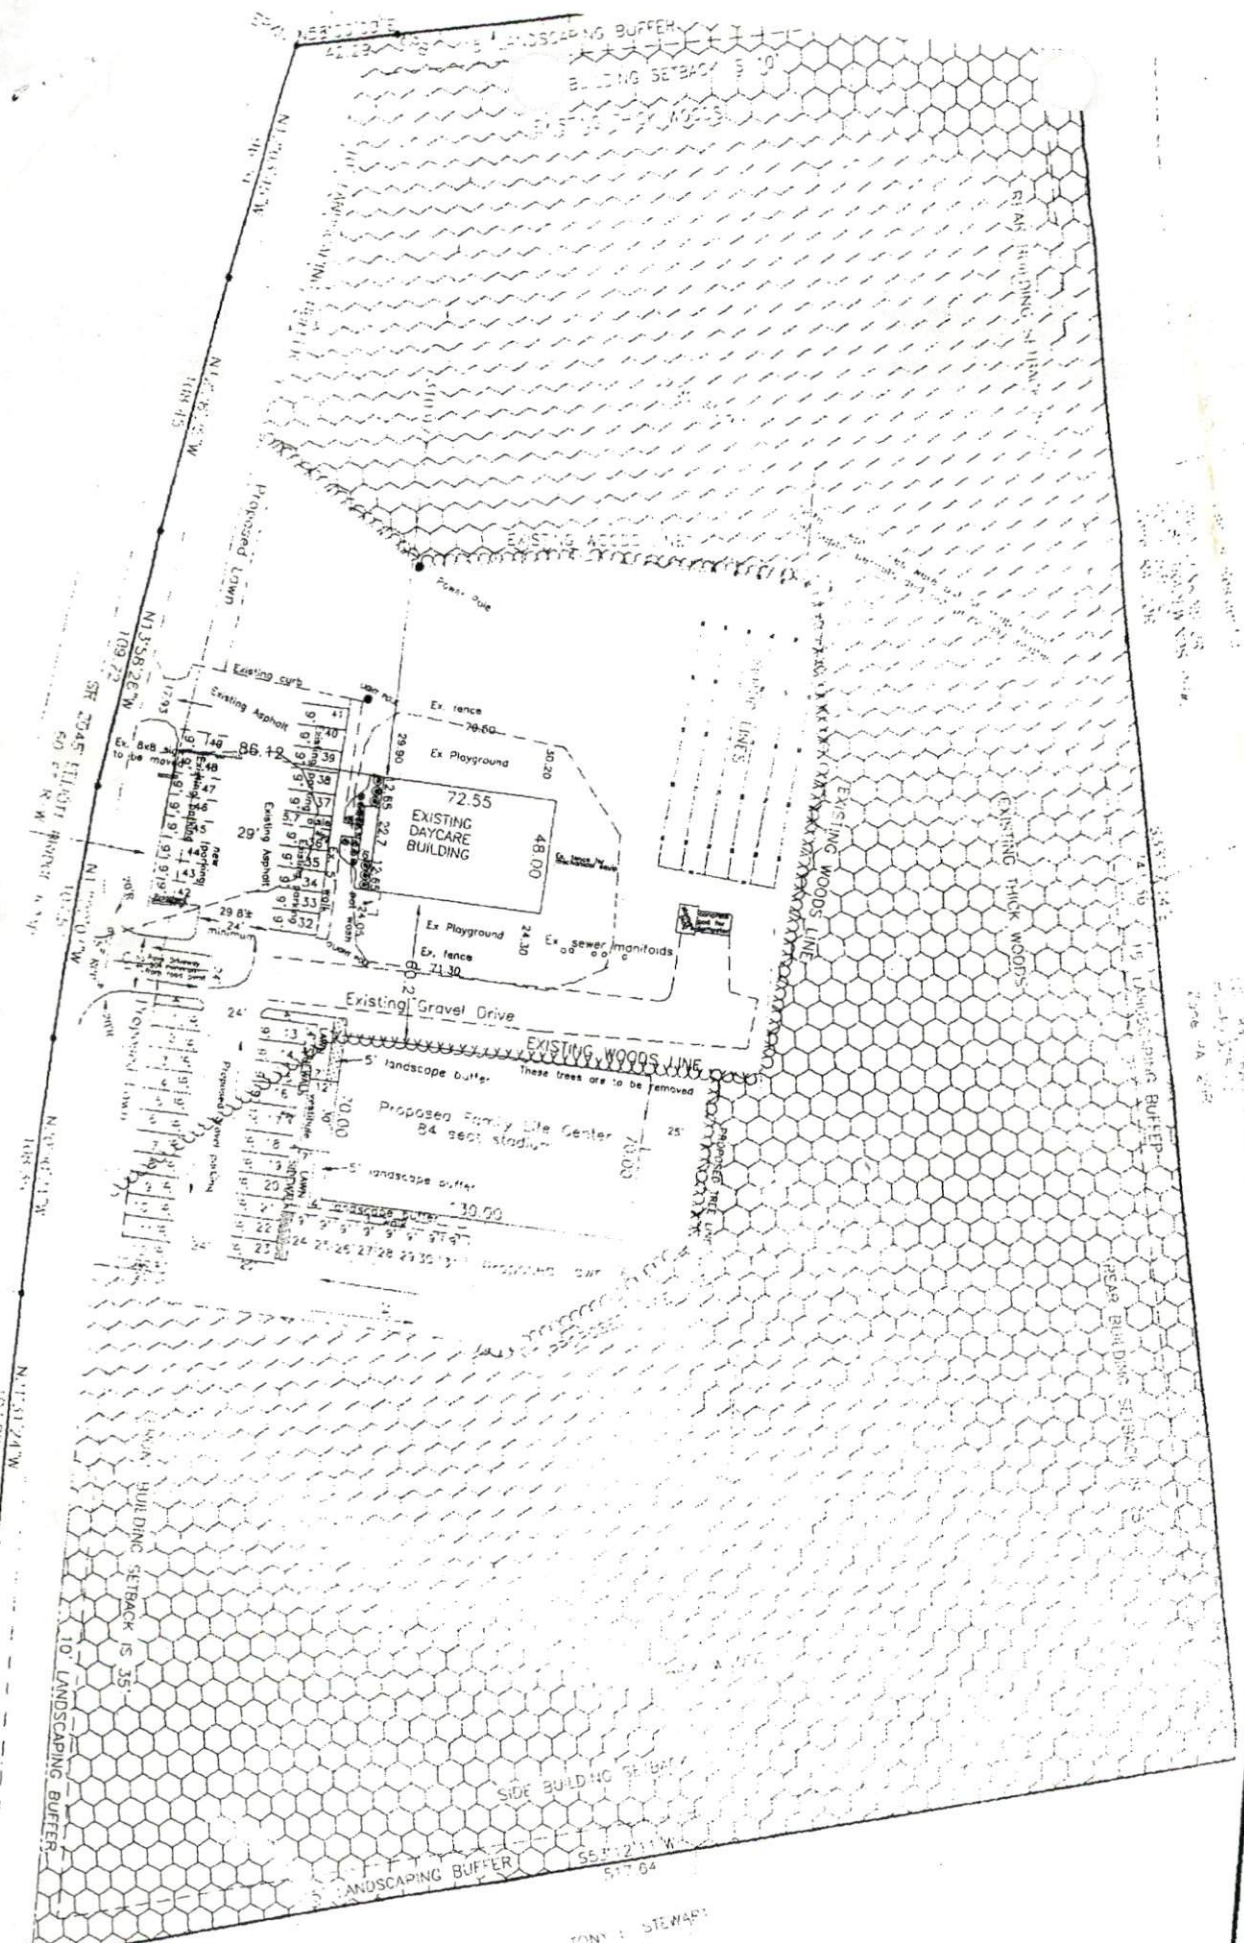

TONY L. STEWART
 LONE STAR
 Timberland

PRESSURE MANIFOLD DESIGN SUMMARY
=====

PROJECT : PURDIE ELLIOTT
 COUNTY :
 REFERENCE NO. :

DESIGN FLOW : 1485 GPD
 APPLICATION RATE : 0.60 GPD/SQFT
 TOTAL AREA TRENCH BOTTOM REQUIRED : 2475 SQFT
 TOTAL LATERAL LENGTH REQUIRED : 825 LFT
 TOTAL LATERAL LENGTH SPECIFIED : 828 LFT
 NUMBER OF FIELDS : 1
 LATERAL LENGTH REQUIRED PER FIELD : 825 LFT

FIELD NO.	NO. OF LATERALS	LATERAL LENGTH	TOTAL PER FIELD
1	6	138	828

FIELD NO.	NOMINAL TAP SIZE	ACTUAL TAP SIZE	TAP MATERIAL	PRESSURE HEAD	TAP FLOW	TAP NO.	FIELD FLOW
1	1/2	0.622	SCHED. 40	2	7.11	6	42.68

FIELD NO.	SUPPLY LINE LENGTH	TOTAL DYNAMIC HEAD	MANIFOLD SIZE
1	100	15.3	4 INCHES

DOSING VOLUME : 350 GALLONS
 PUMP TANK INSIDE LENGTH : 12.00 FEET
 PUMP TANK INSIDE WIDTH : 6.00 FEET
 PUMP TANK DRAWDOWN : 0.65 FEET

Drawdown may change due to different configurations of tank sizes