



Initial Application Date: _____

Application # _____

CU# _____

COUNTY OF HARNETT RESIDENTIAL LAND USE APPLICATION

Central Permitting 420 McKinney Pkwy, Lillington, NC 27546 Phone: (910) 893-7525 ext:1 Fax: (910) 893-2793 www.harnett.org/permits

****A RECORDED SURVEY MAP, RECORDED DEED (OR OFFER TO PURCHASE) & SITE PLAN ARE REQUIRED WHEN SUBMITTING A LAND USE APPLICATION****

LANDOWNER: Robert Allen Mailing Address: 102 Sonora Dr

City: Lillington State: NC Zip: 27546 Contact No: 919-478-8648 Email: jasonal38@gmail.com

APPLICANT*: Dave Steele Mailing Address: 40 Odell School Rd Unit #19

City: Concord State: NC Zip: 28027 Contact No: 704-239-9098 Email: davesteelenc@gmail.com

*Please fill out applicant information if different than landowner

ADDRESS: 102 Sonora Dr Lillington NC 27546 PIN: _____

Zoning: _____ Flood: _____ Watershed: _____ Deed Book / Page: _____

Setbacks - Front: _____ Back: _____ Side: _____ Corner: _____

PROPOSED USE:

SFD: (Size _____ x _____) # Bedrooms: _____ # Baths: _____ Basement(w/wo bath): _____ Garage: _____ Deck: _____ Crawl Space: _____ Slab: _____ Slab: _____
TOTAL HTD SQ FT _____ GARAGE SQ FT _____ (Is the bonus room finished? () yes () no w/ a closet? () yes () no (if yes add in with # bedrooms)

Modular: (Size _____ x _____) # Bedrooms _____ # Baths _____ Basement (w/wo bath) _____ Garage: _____ Site Built Deck: _____ On Frame _____ Off Frame _____
TOTAL HTD SQ FT _____ (Is the second floor finished? () yes () no Any other site built additions? () yes () no

Manufactured Home: _____ SW _____ DW _____ TW (Size _____ x _____) # Bedrooms: _____ Garage: _____ (site built?) Deck: _____ (site built?)

Duplex: (Size _____ x _____) No. Buildings: _____ No. Bedrooms Per Unit: _____ TOTAL HTD SQ FT _____

Home Occupation: # Rooms: _____ Use: _____ Hours of Operation: _____ #Employees: _____

Addition/Accessory/Other: (Size _____ x _____) Use: Residential Rooftop PV solar install- Installing 18 Trina 360w modules w/ Ironridge racking system. Closets in addition? () yes () no
TOTAL HTD SQ FT _____ GARAGE _____

Water Supply: _____ County _____ Existing Well _____ New Well (# of dwellings using well _____) *Must have operable water before final
(Need to Complete New Well Application at the same time as New Tank)

Sewage Supply: _____ New Septic Tank _____ Expansion _____ Relocation _____ Existing Septic Tank _____ County Sewer
(Complete Environmental Health Checklist on other side of application if Septic)

Does owner of this tract of land, own land that contains a manufactured home within five hundred feet (500') of tract listed above? () yes () no

Does the property contain any easements whether underground or overhead () yes (X) no

Structures (existing or proposed): Single family dwellings: X Manufactured Homes: _____ Other (specify): _____

If permits are granted I agree to conform to all ordinances and laws of the State of North Carolina regulating such work and the specifications of plans submitted. I hereby state that foregoing statements are accurate and correct to the best of my knowledge. Permit subject to revocation if false information is provided.

Signature of Owner or Owner's Agent

6/20/2022

Date

It is the owner/applicants responsibility to provide the county with any applicable information about the subject property, including but not limited to: boundary information, house location, underground or overhead easements, etc. The county or its employees are not responsible for any incorrect or missing information that is contained within these applications.

*This application expires 6 months from the initial date if permits have not been issued**

APPLICATION CONTINUES ON BACK

strong roots • new growth

****This application expires 6 months from the initial date if permits have not been issued****

This application to be filled out when applying for a septic system inspection.

County Health Department Application for Improvement Permit and/or Authorization to Construct

IF THE INFORMATION IN THIS APPLICATION IS FALSIFIED, CHANGED, OR THE SITE IS ALTERED, THEN THE IMPROVEMENT PERMIT OR AUTHORIZATION TO CONSTRUCT SHALL BECOME INVALID. The permit is valid for either 60 months or without expiration depending upon documentation submitted. (Complete site plan = 60 months; Complete plat = without expiration)

Environmental Health New Septic System

- **All property irons must be made visible.** Place "pink property flags" on each corner iron of lot. All property lines must be clearly flagged approximately every 50 feet between corners.
- Place "orange house corner flags" at each corner of the proposed structure. Also flag driveways, garages, decks, out buildings, swimming pools, etc. Place flags per site plan developed at/for Central Permitting.
- Place orange Environmental Health card in location that is easily viewed from road to assist in locating property.
- If property is thickly wooded, Environmental Health requires that you clean out the **undergrowth** to allow the soil evaluation to be performed. Inspectors should be able to walk freely around site. **Do not grade property.**
- **All lots to be addressed within 10 business days after confirmation. \$25.00 return trip fee may be incurred for failure to uncover outlet lid, mark house corners and property lines, etc. once lot confirmed ready.**

Environmental Health Existing Tank Inspections

- Follow above instructions for placing flags and card on property.
- Prepare for inspection by removing soil over **outlet end** of tank as diagram indicates, and lift lid straight up (*if possible*) and then **put lid back in place.** (Unless inspection is for a septic tank in a mobile home park)
- **DO NOT LEAVE LIDS OFF OF SEPTIC TANK**

"MORE INFORMATION MAY BE REQUIRED TO COMPLETE ANY INSPECTION"

SEPTIC

If applying for authorization to construct please indicate desired system type(s): can be ranked in order of preference, must choose one.

- Accepted Innovative Conventional Any
 Alternative Other _____

The applicant shall notify the local health department upon submittal of this application if any of the following apply to the property in question. If the answer is "yes", applicant **MUST ATTACH SUPPORTING DOCUMENTATION**:

- YES NO Does the site contain any Jurisdictional Wetlands?
 YES NO Do you plan to have an irrigation system now or in the future?
 YES NO Does or will the building contain any drains? Please explain. _____
 YES NO Are there any existing wells, springs, waterlines or Wastewater Systems on this property?
 YES NO Is any wastewater going to be generated on the site other than domestic sewage?
 YES NO Is the site subject to approval by any other Public Agency?
 YES NO Are there any Easements or Right of Ways on this property?
 YES NO Does the site contain any existing water, cable, phone or underground electric lines?
 If yes please call No Cuts at 800-632-4949 to locate the lines. This is a free service.

I Have Read This Application And Certify That The Information Provided Herein Is True, Complete And Correct. Authorized County And State Officials Are Granted Right Of Entry To Conduct Necessary Inspections To Determine Compliance With Applicable Laws And Rules. I Understand That I Am Solely Responsible For The Proper Identification And Labeling Of All Property Lines And Corners And Making The Site Accessible So That A Complete Site Evaluation Can Be Performed.

Harnett County Central Permitting

Mailing Address - PO Box 65 Lillington, NC 27546 – Physical Address – 420 McKinney PKWY Lillington NC 27546

Ph.: 910-893-7525 - Fax: 910-893-2793 - www.harnett.org/permits

**Certification of Work Performed By Owner/Contractor
(Individual Trade Application)**

Owner (s) of Structure: Robert Allen Phone: 919-478-8648

Owner (s) Mailing Address: 102 Sonora Dr Lillington NC 27546

Land Owner Name (s): Robert Allen Phone: 919-478-8648

Construction or Site Address: 102 Sonora Dr Lillington NC 27546

PIN # _____ Parcel # _____

Job Cost (Required): 22,040 Description of Work to be done Residential Rooftop PV solar install- Installing 18 Trina 360W modules using Iron ridge's racking system

Mechanical: New Unit With Ductwork ___ New Unit Without Ductwork ___ Gas Piping ___ Other ___

Electrical*: 200 Amp ___ <200 Amp ___ Service Change ___ Service Reconnect ___ Other ___

* For Progress Energy customers we need the premise number

Plumbing: Water/Sewer Tap ___ Number of Baths ___ Water Heater ___

Specific Directions to Job from Lillington:

South on McKinney Pkwy, turn Rt on NC-210 S, 8.7mi turn Rt on Anderson Creek School Rd, .4 mi turn Rt on Lemuel Black Rd, 3.8 mi turn Rt on Woodshire Dr, Turn Rt on Sonora Dr , house will be on Rt

Subdivision: _____ Lot #: _____

I Thompson and Son Energy will provide the GC and Electrical labor on this structure.
(Contractors Name) (Trade)

I am the building owner or my NC state license number is GC # 82703 ELEC# 34554, which entitles me to perform such work on the above structure legally. All work shall comply with the State Building Code and all other applicable State and local laws, ordinances and regulations.

Thompson and Son Energy Solutions
Contractor's Company Name
40 Odell School Rd Unit #19 Concord NC 28027
Address
GC #82703/ Elec # 34554
License #

704-239-9098
Telephone
davesteelenc@gmail.com
Email Address

Structure Owner / Contractor Signature:  Date: 6/20/2022

By signing this application, you affirm that you have obtained permission from the above listed license holder to purchase permits on their behalf. If doing the work as owner you understand that you cannot rent, lease or sell the listed property for 12 months after completion of the listed work.

***Company name, address, & phone must match information on license**

Faxed or Mailed application could have an approximately 1-5 day process time



Scott E. Wyssling, PE
Jon P. Ward, SE, PE
Gregory T. Elvestad, PE

76 North Meadowbrook Drive
Alpine, UT 84004
office (201) 874-3483
swyssling@wysslingconsulting.com

June 16, 2022

Current Insight
2852 W. Amini Way
South Jordan, UT 84095

Re: Engineering Services
Allen Residence
102 Sonora Drive, Lillington NC
6.480 kW System

To Whom It May Concern:

We have received information regarding solar panel installation on the roof of the above referenced structure. Our evaluation of the structure is to verify the existing capacity of the roof system and its ability to support the additional loads imposed by the proposed solar system.

A. Site Assessment Information

1. Site visit documentation identifying attic information including size and spacing of framing for the existing roof structure.
2. Design drawings of the proposed system including a site plan, roof plan and connection details for the solar panels. This information will be utilized for approval and construction of the proposed system.

B. Description of Structure:

Roof Framing: Prefabricated wood trusses at 24" on center. All truss members are constructed of 2x4 dimensional lumber.

Roof Material: Composite Asphalt Shingles

Roof Slope: 33 degrees

Attic Access: Accessible

Foundation: Permanent

C. Loading Criteria Used

- **Dead Load**
 - Existing Roofing and framing = 7 psf
 - New Solar Panels and Racking = 3 psf
 - TOTAL = 10 PSF
- **Live Load** = 20 psf (reducible) – 0 psf at locations of solar panels
- **Ground Snow Load** = 15 psf
- **Wind Load** based on ASCE 7-16
 - Ultimate Wind Speed = 120 mph (based on Risk Category II)
 - Exposure Category C

Analysis performed of the existing roof structure utilizing the above loading criteria is in accordance with the 2018 North Carolina Residential Code, including provisions allowing existing structures to not require strengthening if the new loads do not exceed existing design loads by 105% for gravity elements and 110% for seismic elements. This analysis indicates that the existing framing will support the additional panel loading without damage, if installed correctly.


D. Solar Panel Anchorage

1. The solar panels shall be mounted in accordance with the most recent “*RT-MINI Installation Manual*”, which can be found on the RT-MINI website (<https://roof-tech.us/>). If during solar panel installation, the roof framing members appear unstable or deflect non-uniformly, our office should be notified before proceeding with the installation.
2. Connection on the roof is utilizing (5) #14 screws into the existing decking to resist uplift forces. Contractor to verify installation to be performed in accordance with the A-Roof Tech recommendations. Pull out values per screw are based on National Design Specification values for CDX plywood and are identified as 208 lbs/inch. Based on 1/2” sheathing the value per screw would be 104 lbs providing 520 lbs uplift resistance per attachment.
3. Considering the roof slopes, the size, spacing, condition of roof, the panel supports shall be placed no greater than 48” o/c.
4. Panel supports connections shall be staggered to distribute load to adjacent rafters.

Based on the above evaluation, this office certifies that with the racking and mounting specified, the existing roof system will adequately support the additional loading imposed by the solar system. This evaluation is in conformance with the 2018 North Carolina Residential Code, current industry standards, and is based on information supplied to us at the time of this report.

Should you have any questions regarding the above or if you require further information do not hesitate to contact me.

Very truly yours,

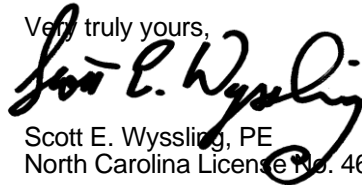

Scott E. Wyssling, PE
North Carolina License No. 46546



NEW PHOTOVOLTAIC SYSTEM 6.48 KW DC

102 SONORA DR, LILLINGTON, NC 27546

CONTRACTOR



COMPLETE SOLAR

3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN

**102 SONORA DR,
LILLINGTON,
NC 27546**

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC



Wyssling Consulting, PLLC
76 N Meadowbrook Drive Alpine UT 84004
North Carolina COA # P-2308

Signed 6-16-22

SHEET TITLE

COVER PAGE

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

G-001

GENERAL NOTES

1.1.1 PROJECT NOTES:

- 1.1.2 THIS PHOTOVOLTAIC (PV) SYSTEM SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE (NEC) ARTICLE 690, ALL MANUFACTURERS'S LISTING AND INSTALLATION INSTRUCTIONS, AND THE RELEVANT CODES AS SPECIFIED BY THE AUTHORITY HAVING JURISDICTION'S (AHJ) APPLICABLE CODES.
- 1.1.3 THE UTILITY INTERCONNECTION APPLICATION MUST BE APPROVED AND PV SYSTEM INSPECTED PRIOR TO PARALLEL OPERATION
- 1.1.4 GROUND FAULT DETECTION AND INTERRUPTION (GFDI) DEVICE IS INTEGRATED WITH THE MICRO-INVERTER IN ACCORDANCE WITH NEC 690.41(B)
- 1.1.5 ALL PV SYSTEM COMPONENTS; MODULES, UTILITY-INTERACTIVE INVERTERS, AND SOURCE CIRCUIT COMBINER BOXES ARE IDENTIFIED AND LISTED FOR USE IN PHOTOVOLTAIC SYSTEMS AS REQUIRED BY NEC 690.4: PV MODULES: UL1703, IEC61730, AND IEC61215, AND NFPA 70 CLASS C FIRE INVERTERS: UL 1741 CERTIFIED, IEEE 1547, 929, 519 COMBINER BOX(ES): UL 1703 OR UL 1741 ACCESSORY
- 1.1.6 MAX DC VOLTAGE CALCULATED USING MANUFACTURER PROVIDED TEMP COEFFICIENT FOR VOC. IF UNAVAILABLE, MAX DC VOLTAGE CALCULATED ACCORDING TO NEC 690.7.
- 1.1.7 ALL INVERTERS, PHOTOVOLTAIC MODULES,PHOTOVOLTAIC PANELS, AND SOURCE CIRCUIT COMBINERS INTENDED FOR USE IN A PHOTOVOLTAIC POWER SYSTEM WILL BE IDENTIFIED AND LISTED FOR THE APPLICATION PER 690.4. SHALL BE INSTALLED ACCORDING TO ANY INSTRUCTIONS FROM LISTING OR LABELING [NEC 110.3].
- 1.1.8 ALL SIGNAGE TO BE PLACED IN ACCORDANCE WITH LOCAL BUILDING CODE. IF EXPOSED TO SUNLIGHT, IT SHALL BE UV RESISTANT. ALL PLAQUES AND SIGNAGE WILL BE INSTALLED AS REQUIRED BY THE NEC AND AHJ.

1.2.1 SCOPE OF WORK:

1.2.2 PRIME CONTRACTOR IS RESPONSIBLE FOR THE DESIGN AND SPECIFICATIONS OF THE GRID-TIED PHOTOVOLTAIC SYSTEM RETROFIT. PRIME CONTRACTOR WILL BE RESPONSIBLE FOR COLLECTING EXISTING ONSITE REQUIREMENTS TO DESIGN, SPECIFY, AND INSTALL THE EXTERIOR ROOF-MOUNTED PORTION OF THE PHOTOVOLTAIC SYSTEMS DETAILED IN THIS DOCUMENT

1.3.1 WORK INCLUDES:

- 1.3.2 PV RACKING SYSTEM INSTALLATION - IRONRIDGE XR10
- 1.3.3 PV MODULE AND INVERTER INSTALLATION - TRINA SOLAR TSM-360DE06X.05(II) / SMA-SUNNY BOY 5.0-US (SB5.0-1SP-US-41) INVERTER
- 1.3.4 PV EQUIPMENT ROOF MOUNT
- 1.3.5 PV SYSTEM WIRING TO A ROOF-MOUNTED JUNCTION BOX
- 1.3.6 PV LOAD CENTERS (IF INCLUDED)
- 1.3.7 PV METERING/MONITORING (IF INCLUDED)
- 1.3.8 PV DISCONNECTS
- 1.3.9 PV GROUNDING ELECTRODE & BONDING TO (E) GEC
- 1.3.10 PV FINAL COMMISSIONING
- 1.3.11 (E) ELECTRICAL EQUIPMENT RETROFIT FOR PV
- 1.3.12 SIGNAGE PLACED IN ACCORDANCE WITH LOCAL BUILDING CODE

PROJECT INFORMATION

OWNER

NAME: ROBERT ALLEN

THIS PLAN HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY SCOTT WYSSLING, PE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

SCOPE OF WORK

SYSTEM SIZE: STC:18 X 360W= 6.48 KW DC
PTC: 18 x 334.6W = 6.02 KW DC
(18) TRINA SOLAR TSM-360DE06X.05(II)
(1) SMA-SUNNY BOY 5.0-US (SB5.0-1SP-US-41)

ATTACHMENT TYPE: ROOF MOUNT
MSP UPGRADE: NO
UTILITY METER UPGRADE: NO

AUTHORITIES HAVING JURISDICTION

BUILDING: HARNETT COUNTY
ZONING: HARNETT COUNTY
UTILITY: SOUTH RIVER ELEC MEMBER CORP
METER NO: 81973687


DESIGN SPECIFICATION

OCCUPANCY: II
CONSTRUCTION: SINGLE-FAMILY
ZONING: RESIDENTIAL
GROUND SNOW LOAD: 15 LB/SQFT
WIND EXPOSURE: C
WIND SPEED: 120 MPH


APPLICABLE CODES & STANDARDS

BUILDING: NCBC 2018, NCRC 2018
ELECTRICAL: NEC 2017
FIRE: NCFC 2018

VICINITY MAP

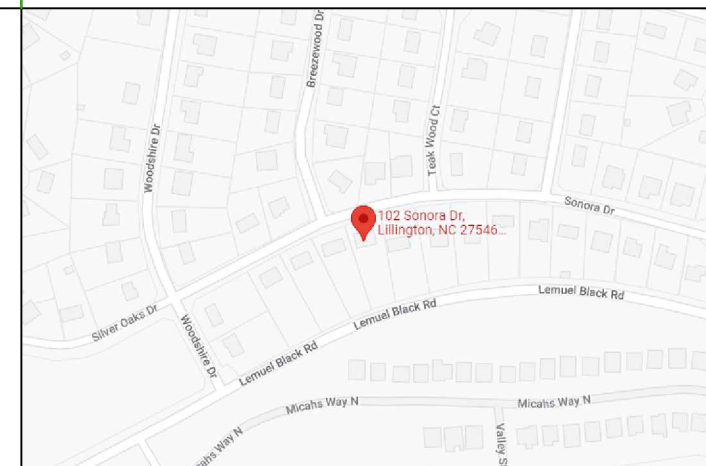

SATELLITE VIEW

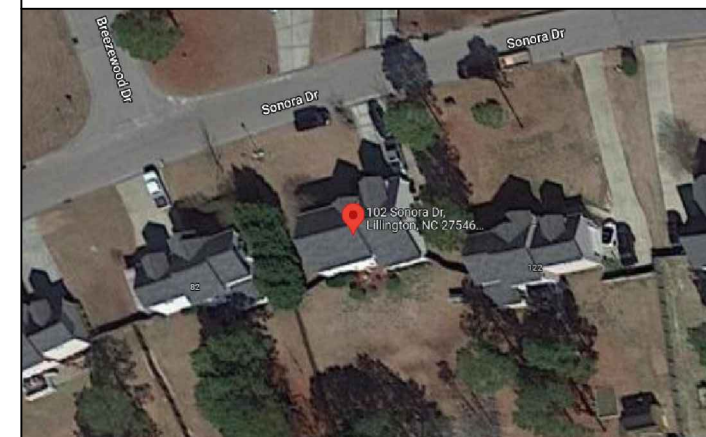

SHEET INDEX

G-001	COVER PAGE
G-002	NOTES
A-101	SITE PLAN
A-102	ELECTRICAL PLAN
A-103	ATTACHMENT PLAN
A-104	STRUCTURAL PLAN
E-601	LINE DIAGRAM
E-602	ELECTRICAL CALCULATIONS
E-603	PLACARD
R-001	RESOURCE DOCUMENT
R-002	RESOURCE DOCUMENT
R-003	RESOURCE DOCUMENT
R-004	RESOURCE DOCUMENT
R-005	RESOURCE DOCUMENT
R-006	RESOURCE DOCUMENT

2.1.1 SITE NOTES:

2.1.2 A LADDER WILL BE IN PLACE FOR INSPECTION IN COMPLIANCE WITH OSHA REGULATIONS.

2.1.3 THE PV MODULES ARE CONSIDERED NON-COMBUSTIBLE AND THIS SYSTEM IS A UTILITY INTERACTIVE SYSTEM WITH NO STORAGE BATTERIES.

2.1.4 THE SOLAR PV INSTALLATION WILL NOT OBSTRUCT ANY PLUMBING, MECHANICAL, OR BUILDING ROOF VENTS.

2.1.5 PROPER ACCESS AND WORKING CLEARANCE AROUND EXISTING AND PROPOSED ELECTRICAL EQUIPMENT WILL BE PROVIDED AS PER SECTION NEC 110.26.

2.1.6 ROOF COVERINGS SHALL BE DESIGNED, INSTALLED, AND MAINTAINED IN ACCORDANCE WITH THIS CODE AND THE APPROVED MANUFACTURER'S INSTRUCTIONS SUCH THAT THE ROOF COVERING SERVES TO PROTECT THE BUILDING OR STRUCTURE.

2.2.1 EQUIPMENT LOCATIONS:

2.2.2 ALL EQUIPMENT SHALL MEET MINIMUM SETBACKS AS REQUIRED BY NEC 110.26.

2.2.3 WIRING SYSTEMS INSTALLED IN DIRECT SUNLIGHT MUST BE RATED FOR EXPECTED OPERATING TEMPERATURE AS SPECIFIED BY NEC 690.31 (A),(C) AND NEC TABLES 310.15 (B)(2)(A) AND 310.15 (B)(3)(C).

2.2.4 JUNCTION AND PULL BOXES PERMITTED INSTALLED UNDER PV MODULES ACCORDING TO NEC 690.34.

2.2.5 ADDITIONAL AC DISCONNECT(S) SHALL BE PROVIDED WHERE THE INVERTER IS NOT WITHIN SIGHT OF THE AC SERVICING DISCONNECT.

2.2.6 ALL EQUIPMENT SHALL BE INSTALLED ACCESSIBLE TO QUALIFIED PERSONNEL ACCORDING TO NEC APPLICABLE CODES.

2.2.7 ALL COMPONENTS ARE LISTED FOR THEIR PURPOSE AND RATED FOR OUTDOOR USAGE WHEN APPROPRIATE.

2.3.1 STRUCTURAL NOTES:

2.3.2 RACKING SYSTEM & PV ARRAY WILL BE INSTALLED ACCORDING TO CODE-COMPLIANT INSTALLATION MANUAL. TOP CLAMPS REQUIRE A DESIGNATED SPACE BETWEEN MODULES, AND RAILS MUST ALSO EXTEND A MINIMUM DISTANCE BEYOND EITHER EDGE OF THE ARRAY/SUBARRAY, ACCORDING TO RAI MANUFACTURER'S INSTRUCTIONS.

2.3.3 JUNCTION BOX WILL BE INSTALLED PER MANUFACTURERS' SPECIFICATIONS. IF ROOF-PENETRATING TYPE, IT SHALL BE FLASHED & SEALED PER LOCAL REQUIREMENTS.

2.3.4 ROOFTOP PENETRATIONS FOR PV RACEWAY WILL BE COMPLETED AND SEALED W/ APPROVED CHEMICAL SEALANT PER CODE BY A LICENSED CONTRACTOR.

2.3.5 ALL PV RELATED ROOF ATTACHMENTS TO BE SPACED NO GREATER THAN THE SPAN DISTANCE SPECIFIED BY THE RACKING MANUFACTURER.

2.3.6 WHEN POSSIBLE, ALL PV RELATED RACKING ATTACHMENTS WILL BE STAGGERED AMONGST THE ROOF FRAMING MEMBERS.

2.4.1 WIRING & CONDUIT NOTES:

2.4.2 ALL CONDUIT AND WIRE WILL BE LISTED AND APPROVED FOR THEIR PURPOSE. CONDUIT AND WIRE SPECIFICATIONS ARE BASED ON MINIMUM CODE REQUIREMENTS AND ARE NOT MEANT TO LIMIT UP-SIZING.

2.4.3 CONDUCTORS SIZED ACCORDING TO NEC 690.8, NEC 690.7.

2.4.4 VOLTAGE DROP LIMITED TO 1.5%.

2.4.5 DC WIRING LIMITED TO MODULE FOOTPRINT.

MICROINVERTER WIRING SYSTEMS SHALL BE LOCATED AND SECURED UNDER THE ARRAY W/ SUITABLE WIRING CLIPS.

2.4.6 AC CONDUCTORS COLORED OR MARKED AS FOLLOWS: PHASE A OR L1- BLACK PHASE B OR L2- RED, OR OTHER CONVENTION IF THREE PHASE PHASE C OR L3- BLUE, YELLOW, ORANGE**, OR OTHER CONVENTION NEUTRAL- WHITE OR GREY IN 4-WIRE DELTA CONNECTED SYSTEMS THE PHASE WITH HIGHER VOLTAGE TO BE MARKED ORANGE [NEC 110.15].

2.5.1 GROUNDING NOTES:

2.5.2 GROUNDING SYSTEM COMPONENTS SHALL BE LISTED FOR THEIR PURPOSE, AND GROUNDING DEVICES EXPOSED TO THE ELEMENTS SHALL BE RATED FOR SUCH USE.

2.5.3 PV EQUIPMENT SHALL BE GROUNDED ACCORDING TO NEC 690.43 AND MINIMUM NEC TABLE 250.122.

2.5.4 METAL PARTS OF MODULE FRAMES, MODULE RACKING, AND ENCLOSURES CONSIDERED GROUNDED IN ACCORD WITH 250.134 AND 250.136(A).

2.5.5 EQUIPMENT GROUNDING CONDUCTORS SHALL BE SIZED ACCORDING TO NEC 690.45 AND MICROINVERTER MANUFACTURERS' INSTRUCTIONS.

2.5.6 EACH MODULE WILL BE GROUNDED USING WEEB GROUNDING CLIPS AS SHOWN IN

MANUFACTURER DOCUMENTATION AND APPROVED BY THE AHJ. IF WEEBS ARE NOT USED, MODULE GROUNDING LUGS MUST BE INSTALLED AT THE SPECIFIED GROUNDING LUG HOLES PER THE MANUFACTURERS' INSTALLATION REQUIREMENTS.

2.5.7 THE GROUNDING CONNECTION TO A MODULE SHALL BE ARRANGED SUCH THAT THE REMOVAL OF A MODULE DOES NOT INTERRUPT A GROUNDING CONDUCTOR TO ANOTHER MODULE.

2.5.8 GROUNDING AND BONDING CONDUCTORS, IF INSULATED, SHALL BE COLORED GREEN OR MARKED GREEN IF #4 AWG OR LARGER [NEC 250.119]

2.5.9 THE GROUNDING ELECTRODE SYSTEM COMPLIES WITH NEC 690.47 AND NEC 250.50 THROUGH 250.106. IF EXISTING SYSTEM IS INACCESSIBLE, OR INADEQUATE, A GROUNDING ELECTRODE SYSTEM PROVIDED ACCORDING TO NEC 250, NEC 690.47 AND AHJ.

2.5.10 GROUND-FAULT DETECTION SHALL COMPLY WITH NEC 690.41(B)(1) AND (2) TO REDUCE FIRE HAZARDS

2.6.1 DISCONNECTION AND OVER-CURRENT PROTECTION NOTES:

2.6.2 DISCONNECTING SWITCHES SHALL BE WIRED SUCH THAT WHEN THE SWITCH IS OPENED THE CONDUCTORS REMAINING ENERGIZED ARE RECONNECTED TO THE TERMINALS MARKED "LINE SIDE" (TYPICALLY THE UPPER TERMINALS).

2.6.3 DISCONNECTS TO BE ACCESSIBLE TO QUALIFIED UTILITY PERSONNEL, BE LOCKABLE, AND BE A VISIBLE-BREAK SWITCH

2.6.4 PV SYSTEM CIRCUITS INSTALLED ON OR IN BUILDINGS SHALL INCLUDE A RAPID SHUTDOWN FUNCTION TO REDUCE SHOCK HAZARD FOR EMERGENCY RESPONDERS IN ACCORDANCE WITH 690.12(A) THROUGH (D).

2.6.5 ALL OCPD RATINGS AND TYPES SPECIFIED ACCORDING TO NEC 690.8, 690.9, AND 240.

2.6.6 MICROINVERTER BRANCHES CONNECTED TO A SINGLE BREAKER OR GROUPED FUSES IN ACCORDANCE WITH NEC 110.3(B).

2.6.7 IF REQUIRED BY AHJ, SYSTEM WILL INCLUDE ARC-FAULT CIRCUIT PROTECTION ACCORDING TO NEC 690.11 AND UL1699B.

2.7.1 INTERCONNECTION NOTES:

2.7.2 LOAD-SIDE INTERCONNECTION SHALL BE IN ACCORDANCE WITH [NEC 705.12 (B)]

2.7.3 THE SUM OF THE UTILITY OCPD AND INVERTER CONTINUOUS OUTPUT MAY NOT EXCEED 120% OF BUSBAR RATING [NEC 705.12(B)(2)(3)(b)].

2.7.4 THE SUM OF 125 PERCENT OF THE POWER SOURCE(S) OUTPUT CIRCUIT CURRENT AND THE RATING OF THE OVERCURRENT DEVICE PROTECTING THE BUSBAR SHALL NOT EXCEED 120 PERCENT OF THE AMPACITY OF THE BUSBAR, PV DEDICATED BACKFEED BREAKERS MUST BE LOCATED OPPOSITE END OF THE BUS FROM THE UTILITY SOURCE OCPD [NEC 705.12(B)(2)(3)].

2.7.5 AT MULTIPLE ELECTRIC POWER SOURCES OUTPUT COMBINER PANEL, TOTAL RATING OF ALL OVERCURRENT DEVICES SHALL NOT EXCEED AMPACITY OF BUSBAR. HOWEVER, THE COMBINED OVERCURRENT DEVICE MAY BE EXCLUDED ACCORDING TO NEC 705.12 (B)(2)(3)(C).

2.7.6 FEEDER TAP INTERCONNECTION (LOADSIDE) ACCORDING TO NEC 705.12 (B)(2)(1)

2.7.7 SUPPLY SIDE TAP INTERCONNECTION ACCORDING TO NEC 705.12 (A) WITH SERVICE ENTRANCE CONDUCTORS IN ACCORDANCE WITH NEC 230.42

2.7.8 BACKFEEDING BREAKER FOR ELECTRIC POWER SOURCES OUTPUT IS EXEMPT FROM ADDITIONAL FASTENING [NEC 705.12 (B)(5)].

THIS PLAN HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY SCOTT WYSSLING, PE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

CONTRACTOR



COMPLETE SOLAR

3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN

102 SONORA DR,
LILLINGTON,
NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC



Wyssling Consulting, PLLC
76 N Meadowbrook Drive Alpine UT 84004
North Carolina COA # P-2308

Signed 6-16-22

SHEET TITLE

NOTES

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

G-002

TOTAL HOME SQUARE FOOTAGE IS: 2105 FT²
 TOTAL ARRAY SQUARE FOOTAGE IS: 357.21 FT²
 % COVERED BY SOLAR IS: 16.97%

(18) TRINA SOLAR TSM-360DE06X.05(II)
 (1) SMA-SUNNY BOY 5.0-US (SB5.0-1SP-US-41)

ADDRESS : 102 SONORA DR
 CITY ZIP : LILLINGTON, NC 27546
 METER NO: 81973687

CONTRACTOR



COMPLETE SOLAR
 3000 EXECUTIVE PKWY
 SUITE #504
 SAN RAMON, CA 94583
 PHONE NUMBER:
 (877) 299-4943
 Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN

**102 SONORA DR,
 LILLINGTON,
 NC 27546**

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
 AC SIZE: 5.000 KW AC



Wyssling Consulting, PLLC
 76 N Meadowbrook Drive Alpine UT 84004
 North Carolina COA # P-2308

Signed 6-16-22

SHEET TITLE


SITE PLAN

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

A-101

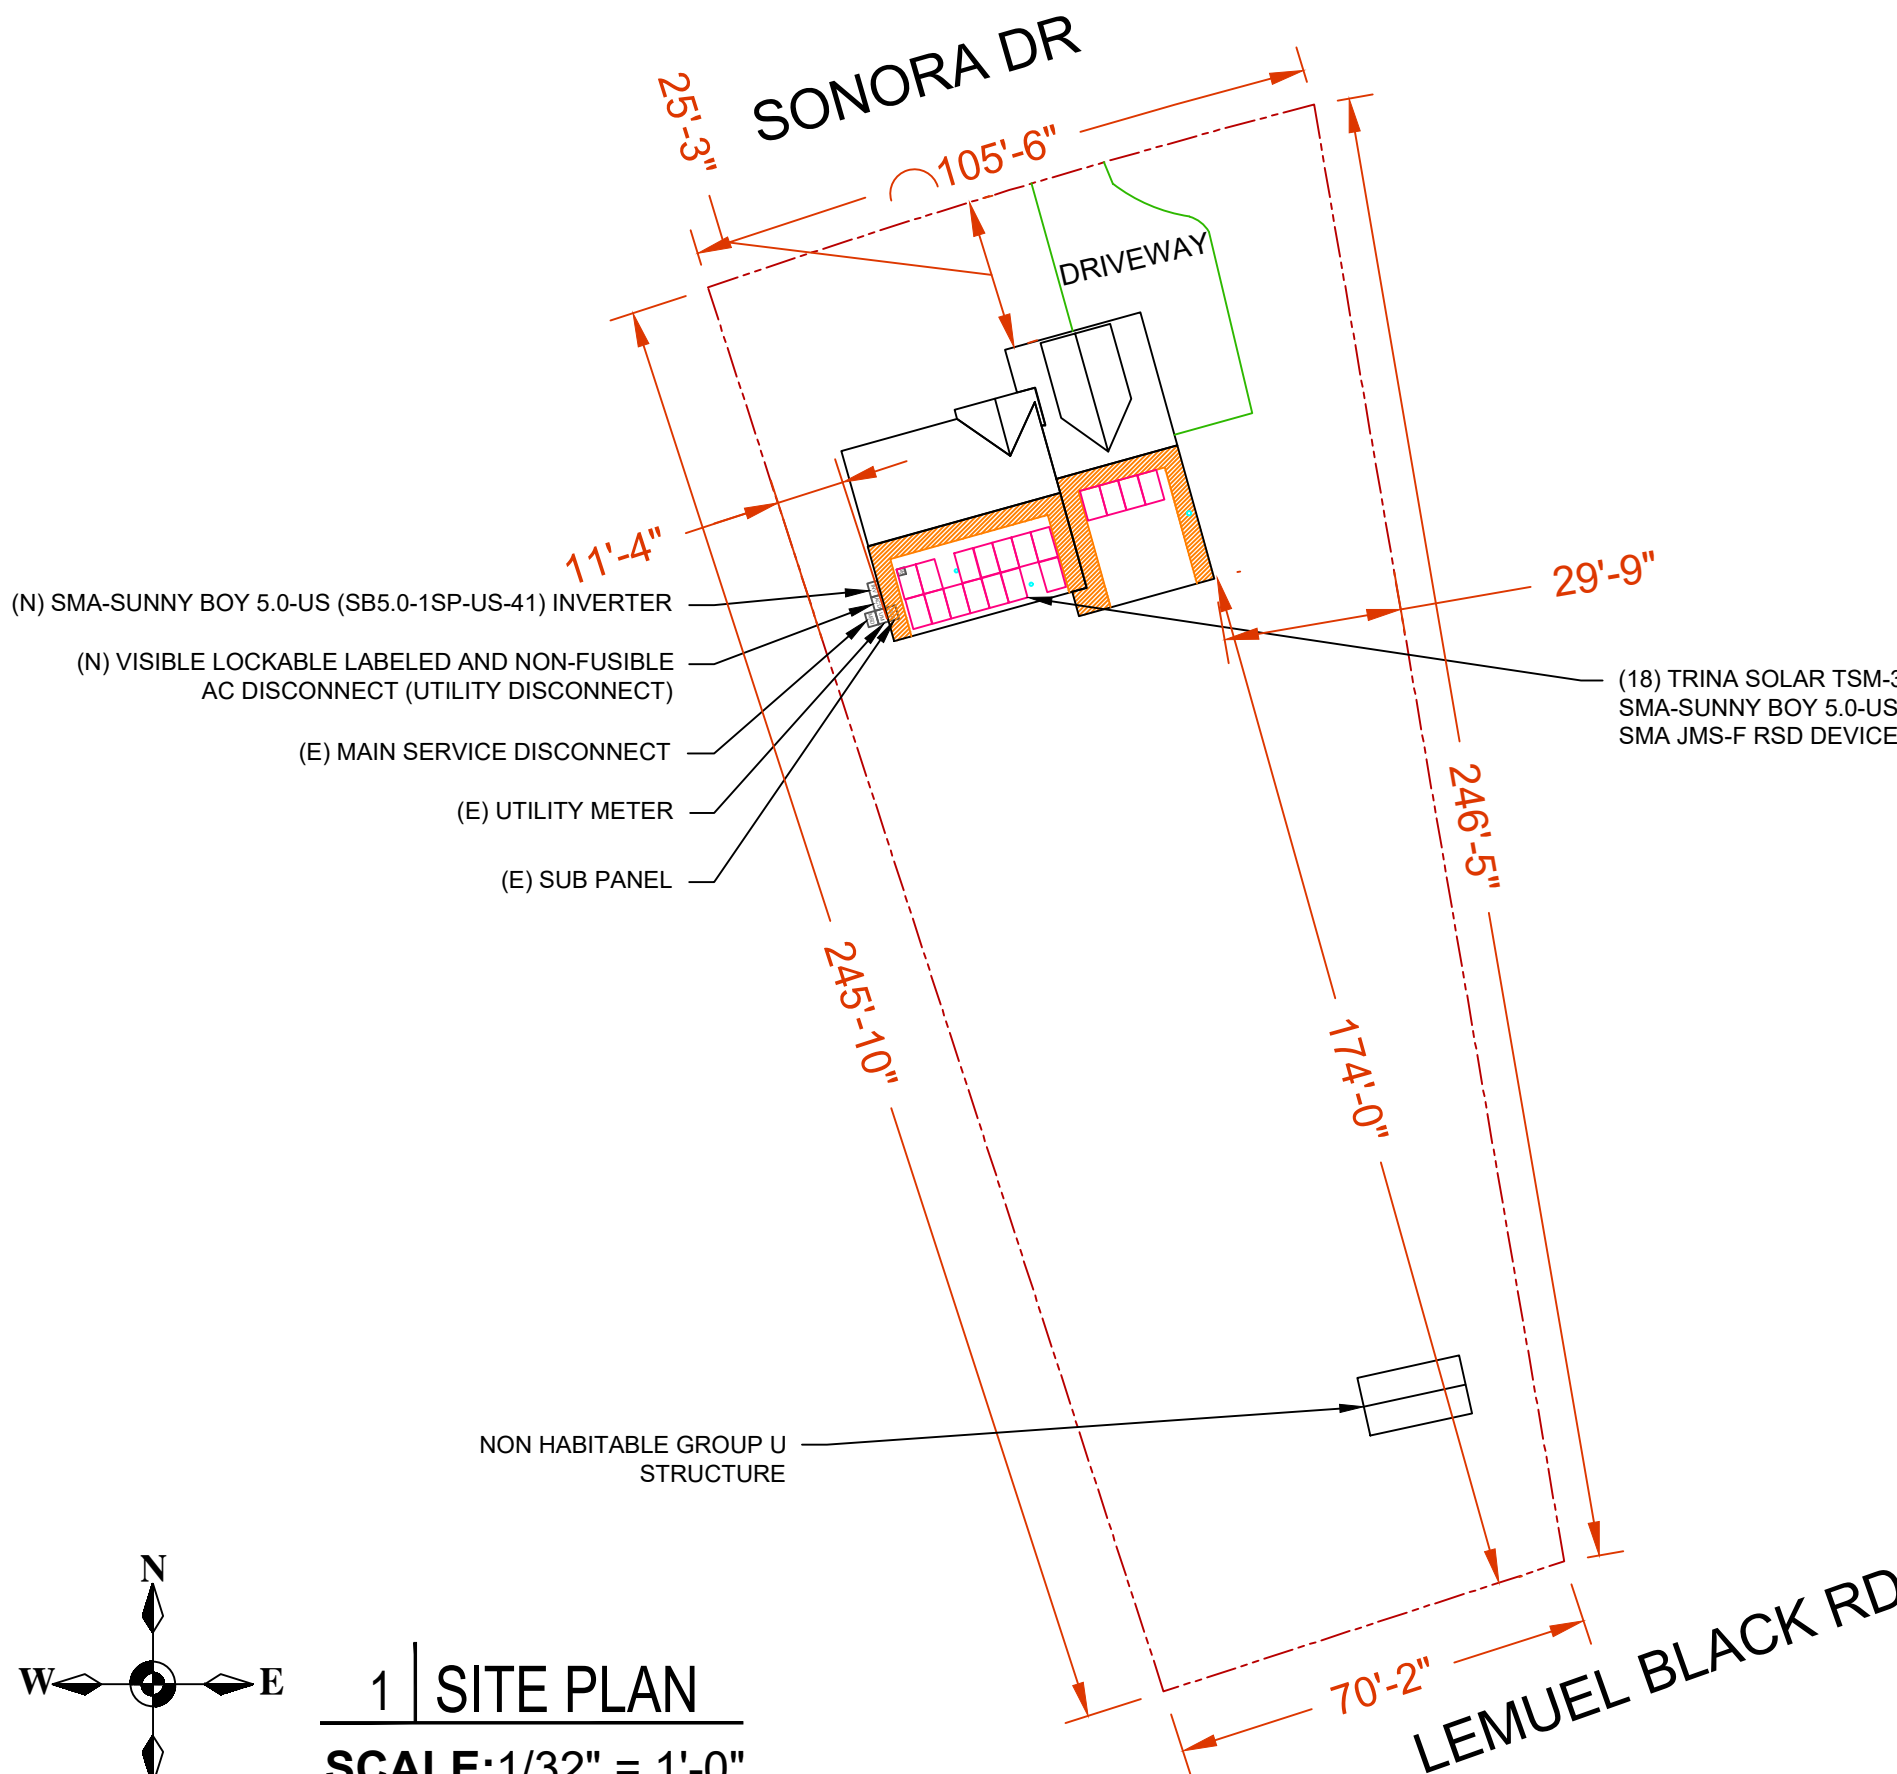







(18) TRINA SOLAR TSM-360DE06X.05(II) MODULES WITH
 SMA-SUNNY BOY 5.0-US (SB5.0-1SP-US-41) INVERTER &
 SMA JMS-F RSD DEVICE (240V)


THIS PLAN HAS BEEN ELECTRONICALLY SIGNED AND
 SEALED BY SCOTT WYSSLING, PE USING A DIGITAL
 SIGNATURE AND DATE. PRINTED COPIES OF THIS
 DOCUMENT ARE NOT CONSIDERED SIGNED AND
 SEALED AND THE SIGNATURE MUST BE VERIFIED
 ON ANY ELECTRONIC COPIES

DC SIZE 18 X 360W = 6.480 kW DC-STC
 AC SIZE 1 X 5000W = 5.000 kW AC

LEGEND

-  - FIRE SETBACK
-  - PROPERTY LINE
-  - JUNCTION BOX
-  - SKYLIGHT (ROOF OBSTRUCTION)
-  - CHIMNEY (ROOF OBSTRUCTION)
-  - VENT, ATTIC FAN (ROOF OBSTRUCTION)

1 | **SITE PLAN**
SCALE: 1/32" = 1'-0"




ROOF SECTION(S)

ROOF 1	TILT - 33° AZIMUTH - 165° MODULE - 14 SYSTEM SIZE (KW)- 5.04
ROOF 2	TILT - 33° AZIMUTH - 165° MODULE - 4 SYSTEM SIZE (KW)- 1.44

- ① - MODULE STRING
- ② - MODULE STRING

CONTRACTOR



COMPLETE SOLAR
3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN

**102 SONORA DR,
LILLINGTON,
NC 27546**

COUNTY:-HARNETT COUNTY

SYSTEM SIZE
DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC




Wyssling Consulting, PLLC
76 N Meadowbrook Drive Alpine UT 84004
North Carolina COA # P-2308
Signed 6-16-22

SHEET TITLE
ELECTRICAL PLAN

DRAWN DATE	6/10/2022
DRAWN BY	AP

SHEET NUMBER
A-102

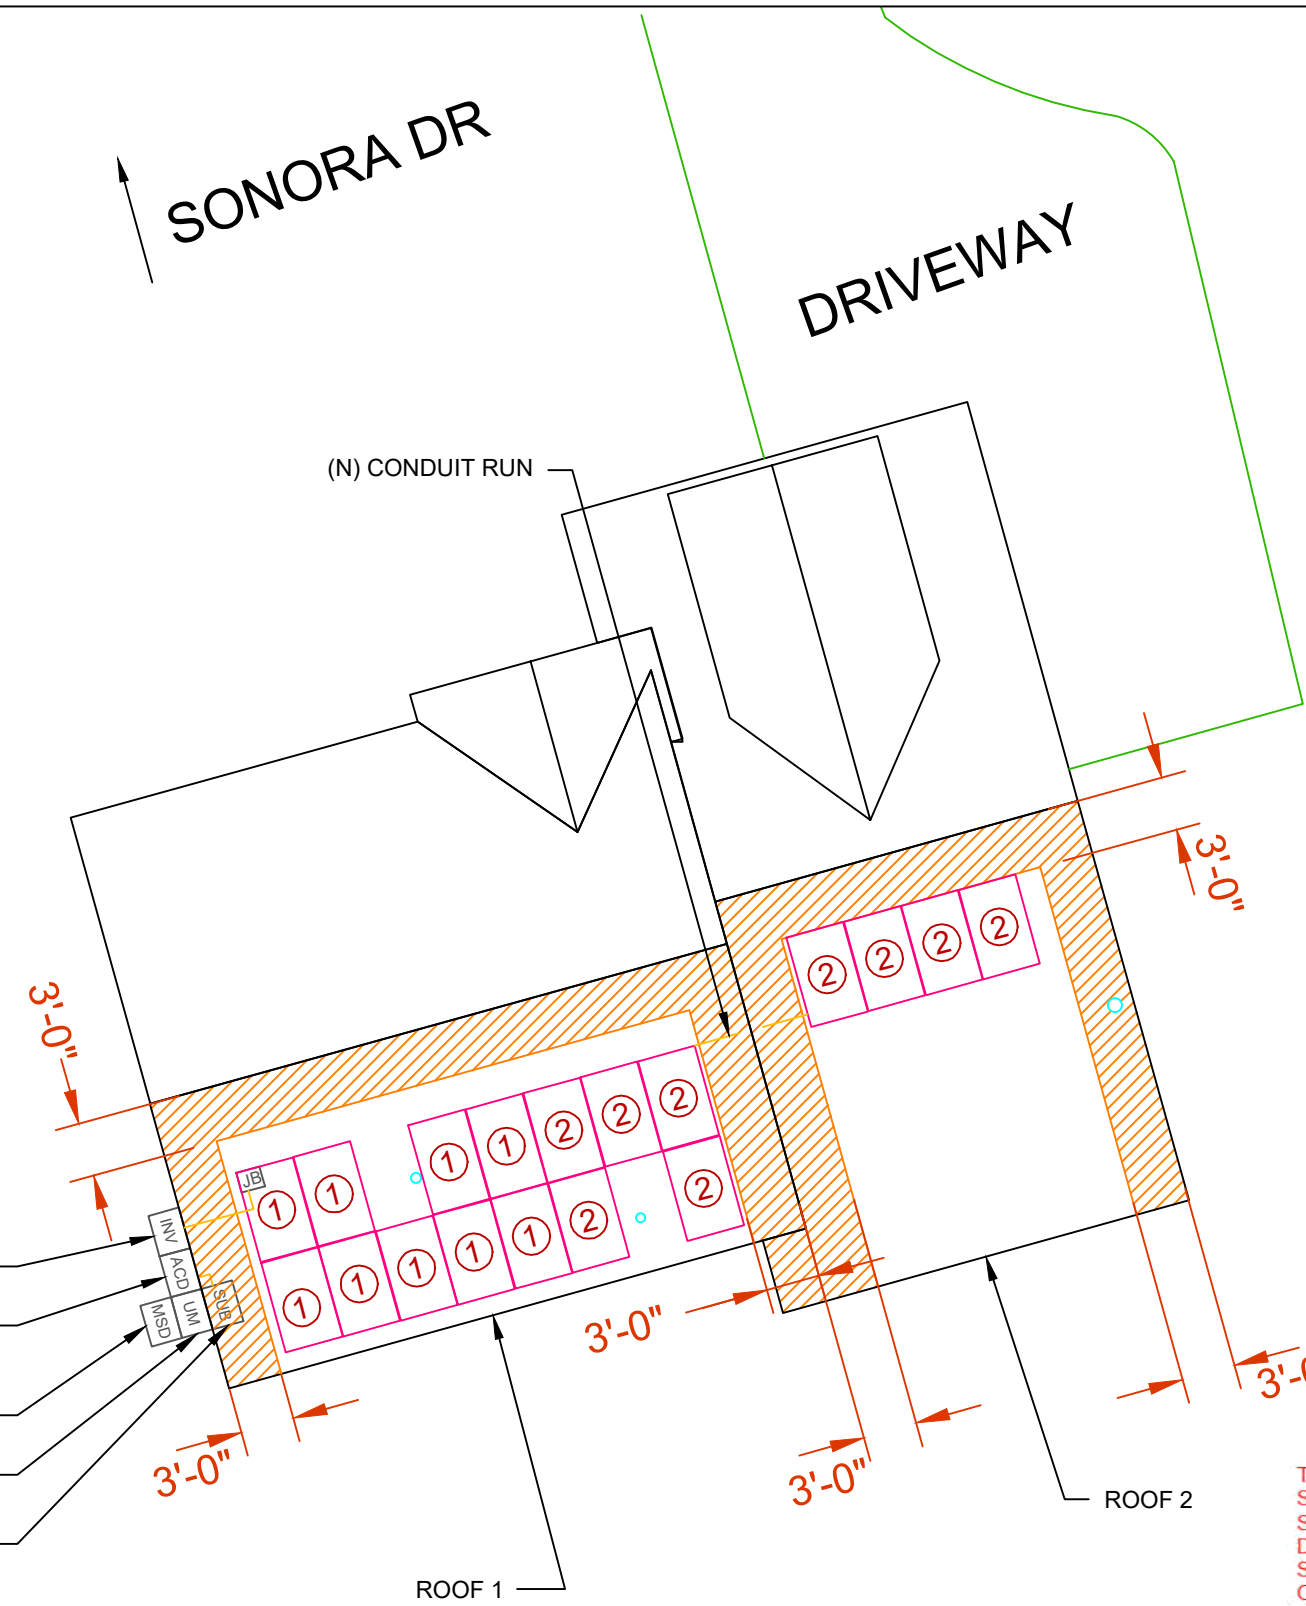


- (N) SMA-SUNNY BOY 5.0-US (SB5.0-1SP-US-41) INVERTER
- (N) VISIBLE LOCKABLE LABELED AND NON-FUSIBLE AC DISCONNECT (UTILITY DISCONNECT)
- (E) MAIN SERVICE DISCONNECT
- (E) UTILITY METER
- (E) SUB PANEL

THIS PLAN HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY SCOTT WYSSLING, PE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

LEGEND


	- FIRE SETBACK
	- PROPERTY LINE
	- JUNCTION BOX
	- SKYLIGHT (ROOF OBSTRUCTION)
	- CHIMNEY (ROOF OBSTRUCTION)
	- VENT, ATTIC FAN (ROOF OBSTRUCTION)




1 | ELECTRICAL PLAN
SCALE: 3/32" = 1'-0"

LEMUEL BLACK RD

□ - CLAMP
● - RT MINI MOUNT
— - RAIL
- - - - TRUSS
43 - TOTAL MOUNT

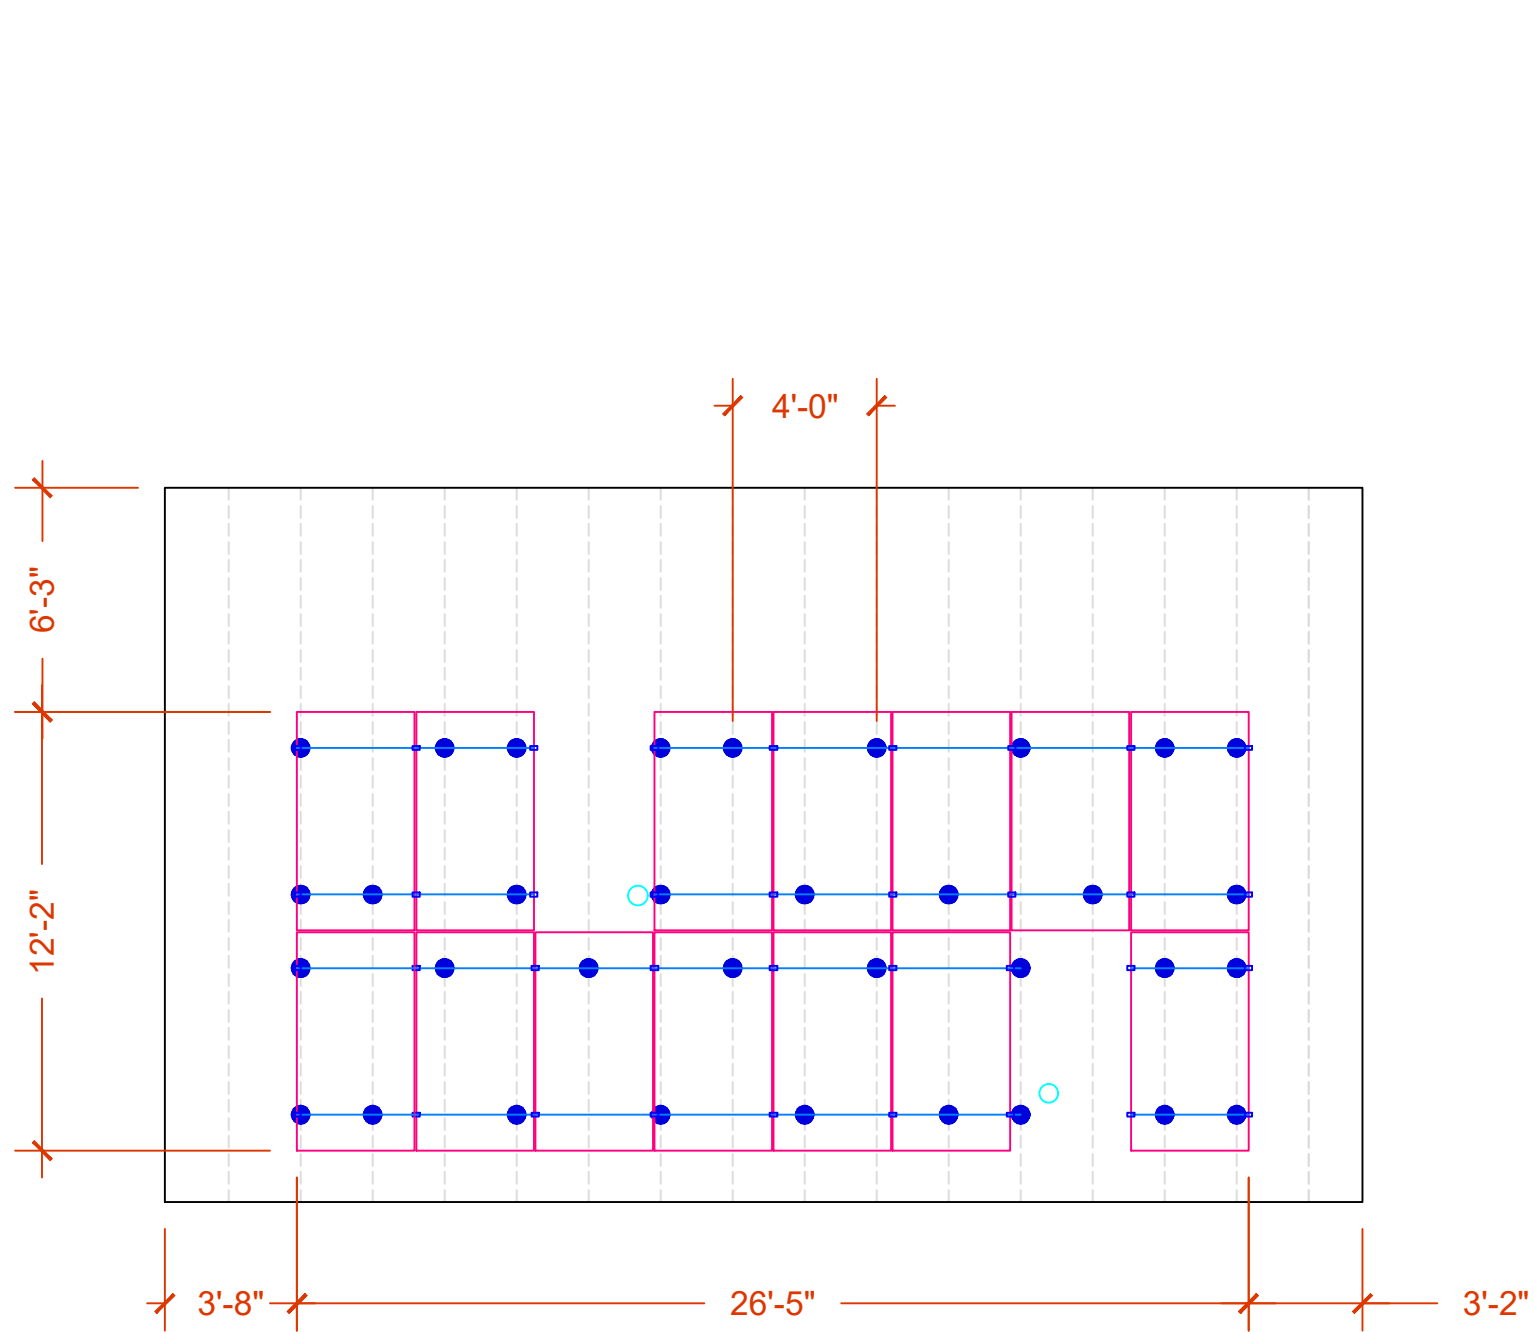


ARRAY 1
 TILT- 33 DEG
 AZIMUTH - 165 DEG

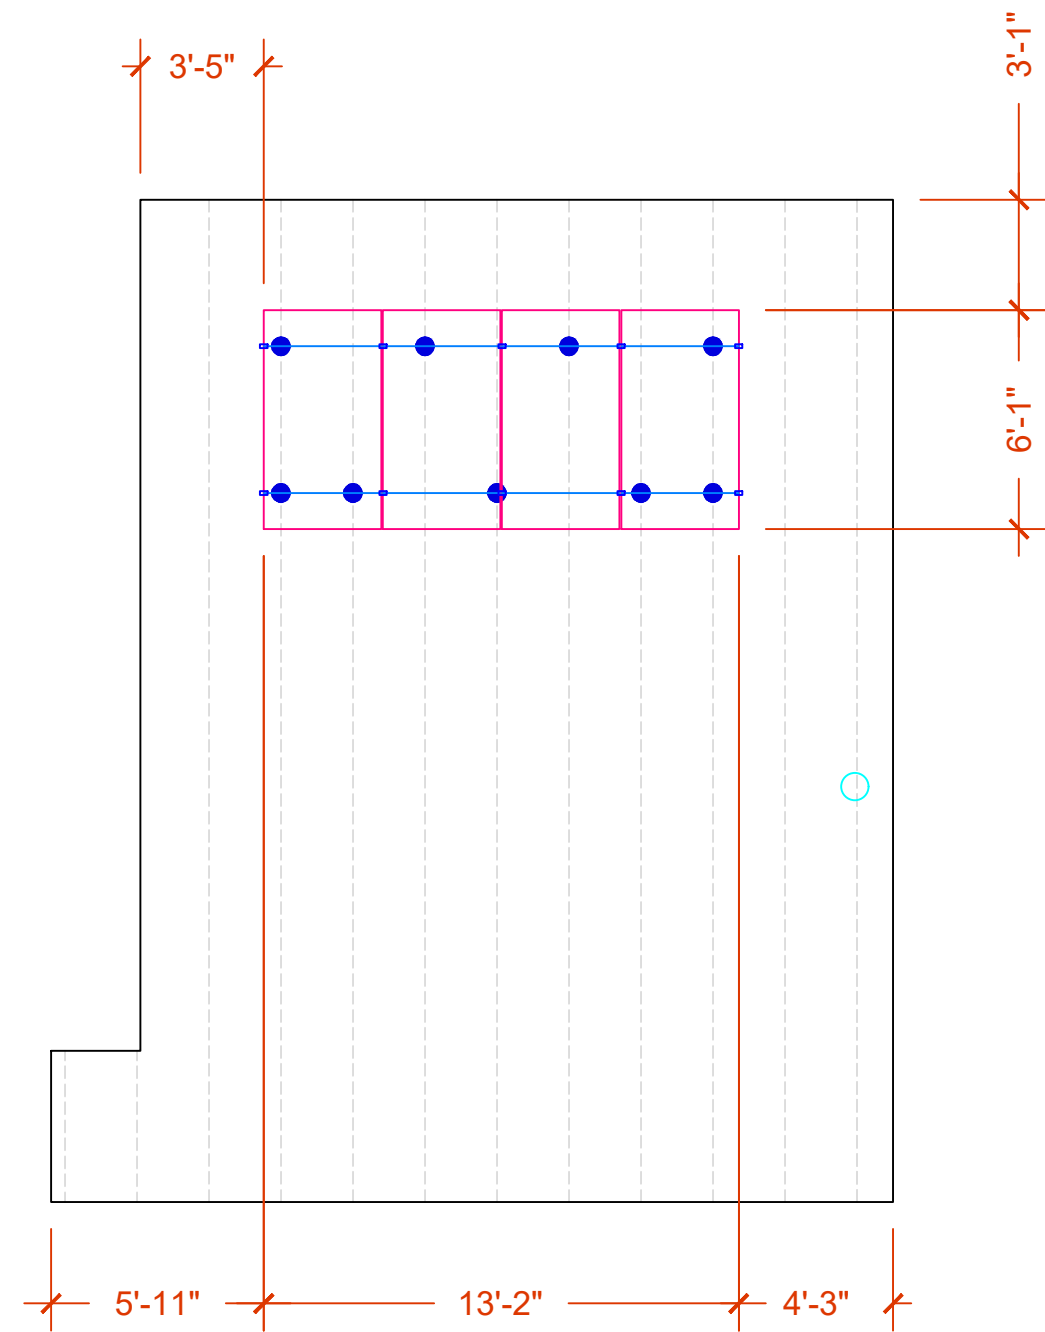

ARRAY 2
 TILT- 33 DEG
 AZIMUTH - 165 DEG


1 | ATTACHMENT PLAN
SCALE: 3/16" = 1'-0"

THIS PLAN HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY SCOTT WYSSLING, PE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

CONTRACTOR

COMPLETE SOLAR
 3000 EXECUTIVE PKWY
 SUITE #504
 SAN RAMON, CA 94583
 PHONE NUMBER:
 (877) 299-4943
 Lic# 961988

PROJECT NAME & ADDRESS
ROBERT ALLEN
102 SONORA DR,
LILLINGTON,
NC 27546
 COUNTY:-HARNETT COUNTY

SYSTEM SIZE
 DC SIZE: 6.480 KW DC-(STC)
 AC SIZE: 5.000 KW AC



Wysling Consulting, PLLC
 76 N Meadowbrook Drive Alpine UT 84004
 North Carolina COA # P-2308
 Signed 6-16-22

SHEET TITLE
ATTACHMENT PLAN

DRAWN DATE	6/10/2022
DRAWN BY	AP

SHEET NUMBER
A-103

ROOF SECTION(S)

ROOF 1	ROOF MATERIAL - COMPOSITE SHINGLE TRUSS SIZE - 2"X4" O.C. SPACING - 24"
ROOF 2	ROOF MATERIAL - COMPOSITE SHINGLE TRUSS SIZE - 2"X4" O.C. SPACING - 24"

CONTRACTOR



COMPLETE SOLAR

3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN

**102 SONORA DR,
LILLINGTON,
NC 27546**

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC



Wyssling Consulting, PLLC
76 N Meadowbrook Drive Alpine UT 84004
North Carolina COA # P-2308

Signed 6-16-22

SHEET TITLE



STRUCTURAL PLAN

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

A-104

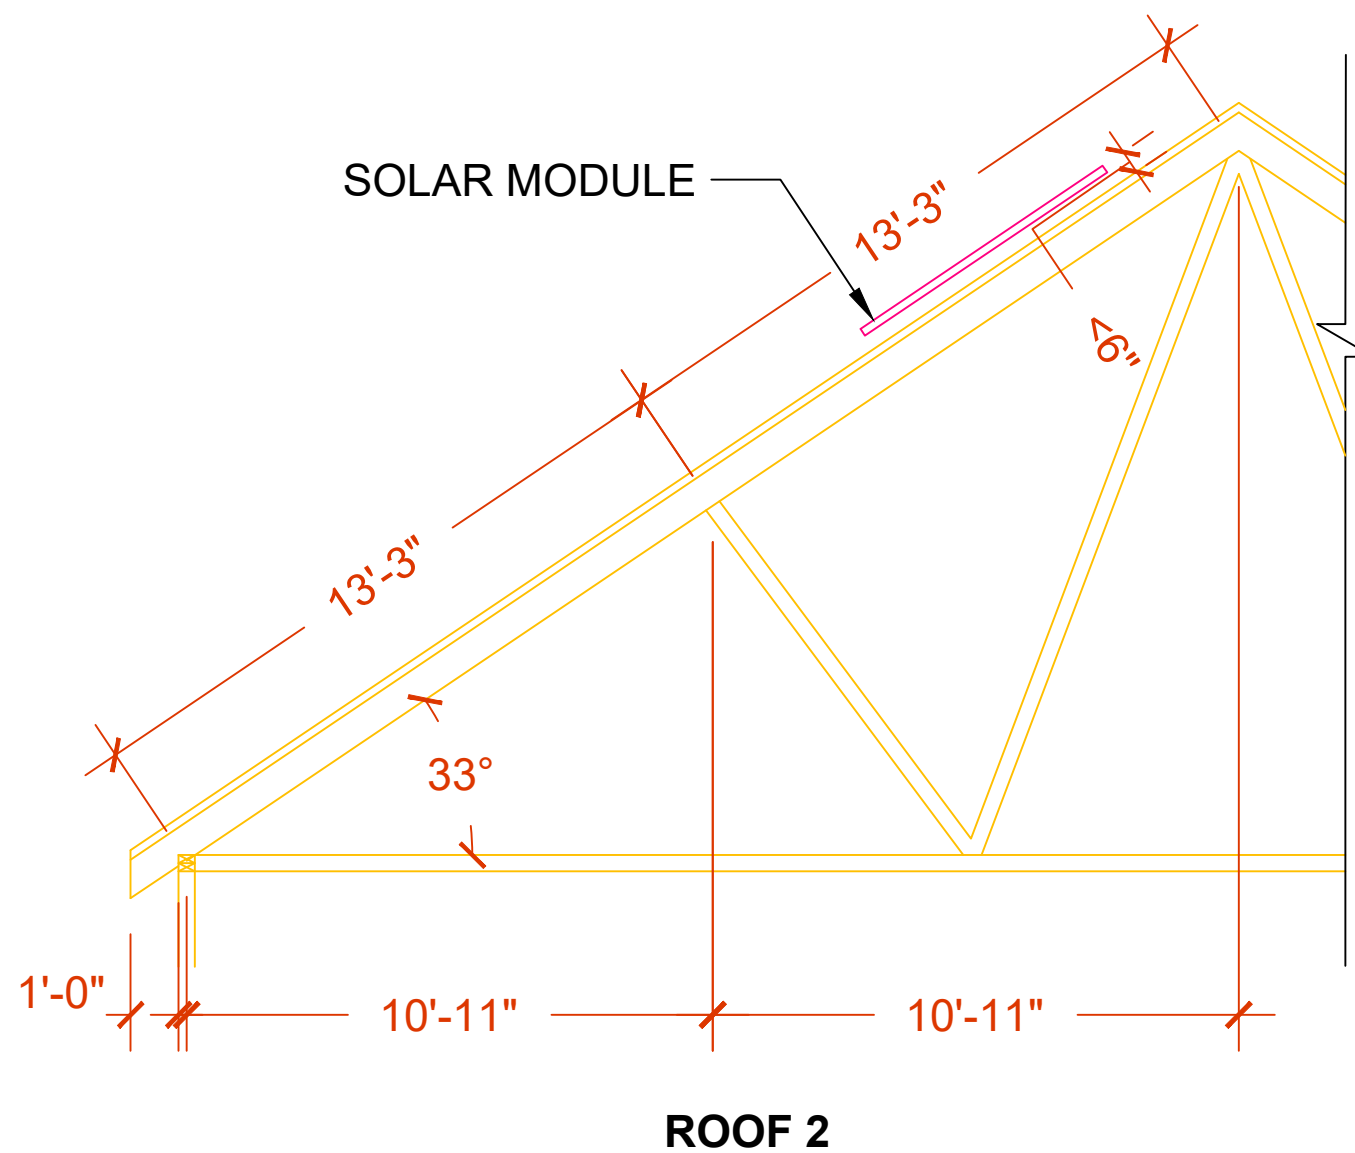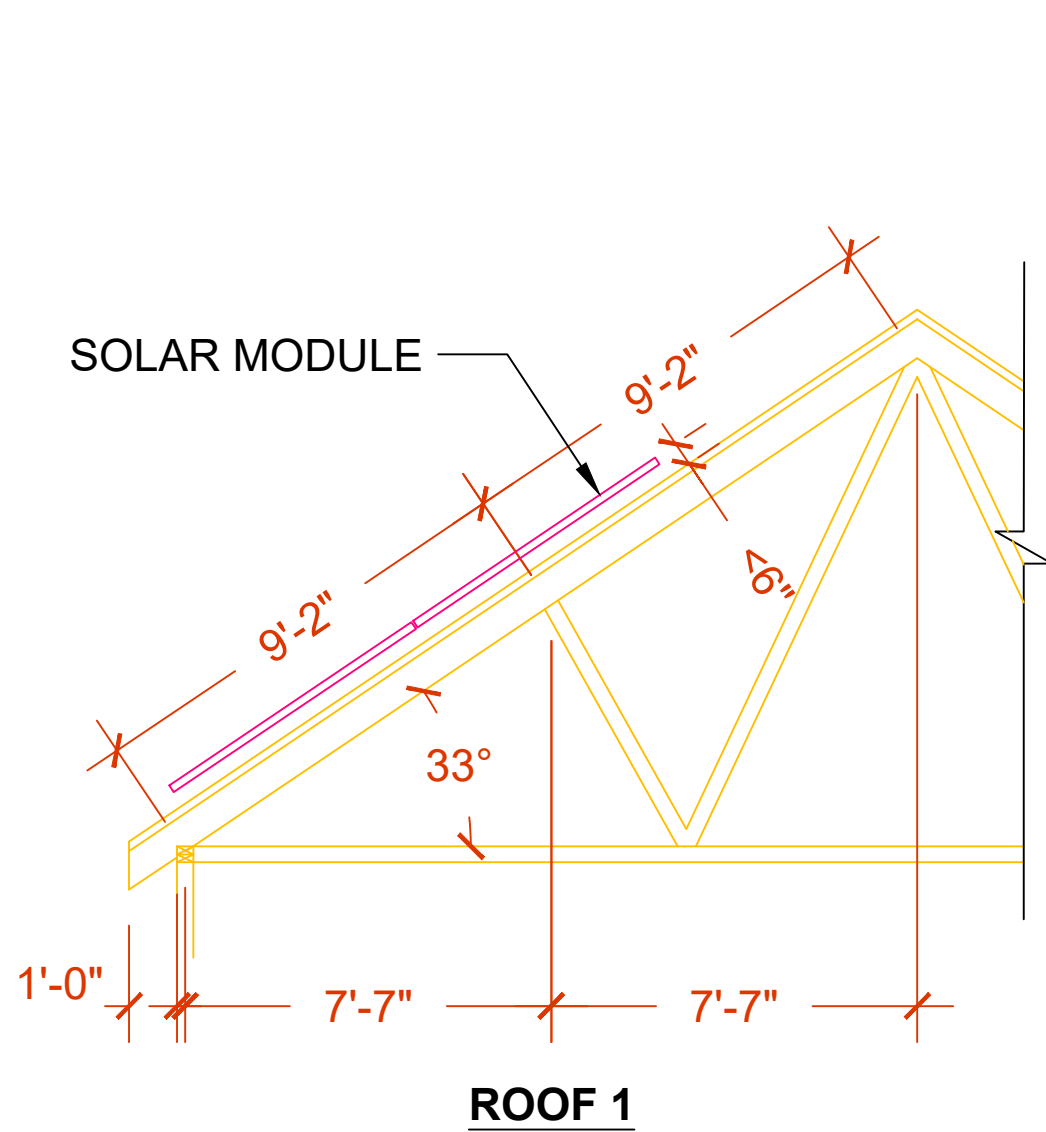

THIS PLAN HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY SCOTT WYSSLING, PE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

1 | STRUCTURAL PLAN
SCALE: 1/4"=1'-0"


SOLAR MODULE SPECIFICATIONS	
MANUFACTURER / MODEL #	TRINA SOLAR TSM-360DE06X.05(II)
VMP	37 V
IMP	9.74 A
VOC	44.8 V
ISC	10.3A
TEMP. COEFF. VOC	-0.25%/°C
MODULE DIMENSION	72.9"L x 39.2"W x 1.4"D (In Inch)

DC SIZE 18 X 360W = 6.480 kW DC-STC
AC SIZE 1 X 5000W = 5.000 kW AC

INVERTER SPECIFICATIONS	
MANUFACTURER / MODEL #	SMA-SUNNY BOY 5.0-US (SB5.0-1SP-US-41) INVERTER
POWER RATING	5000W
MAX OUTPUT CURRENT	21A
CEC WEIGHTED EFFICIENCY	97%
MAX INPUT CURRENT	18A (PER MPPT)
MAX DC VOLTAGE	600V

NOTE :
CONDUIT TO BE UL LISTED FOR WET LOCATIONS AND UV PROTECTED (EX. -EMT,PVC OR RMC)
*FMC MAYBE USED IN INDOOR APPLICATIONS WHERE PERMITTED BY NEC ART .348

$V_{MAX} = V_{OC} + ((T_{LOW} - T_{STC}) \times (V_{OC} \times COEF \times V_{OC} / 100))$
 $V_{MAX} = 44.8 + (-10 - 25) \times (-0.25 \times 44.8 / 100)$
 $V_{MAX} = 44.8 + (-35) \times (-0.112)$
 $V_{MAX} = 44.8 + 3.92$
 $V_{MAX} = 48.72V$
 $V_{MAX} \text{ FOR } 09 \text{ MODULE} = 438.48$
 $DC \text{ SYSTEM VOLTAGE OF INVERTER} = 600V$
 $600 / 48.72 = 12.32$

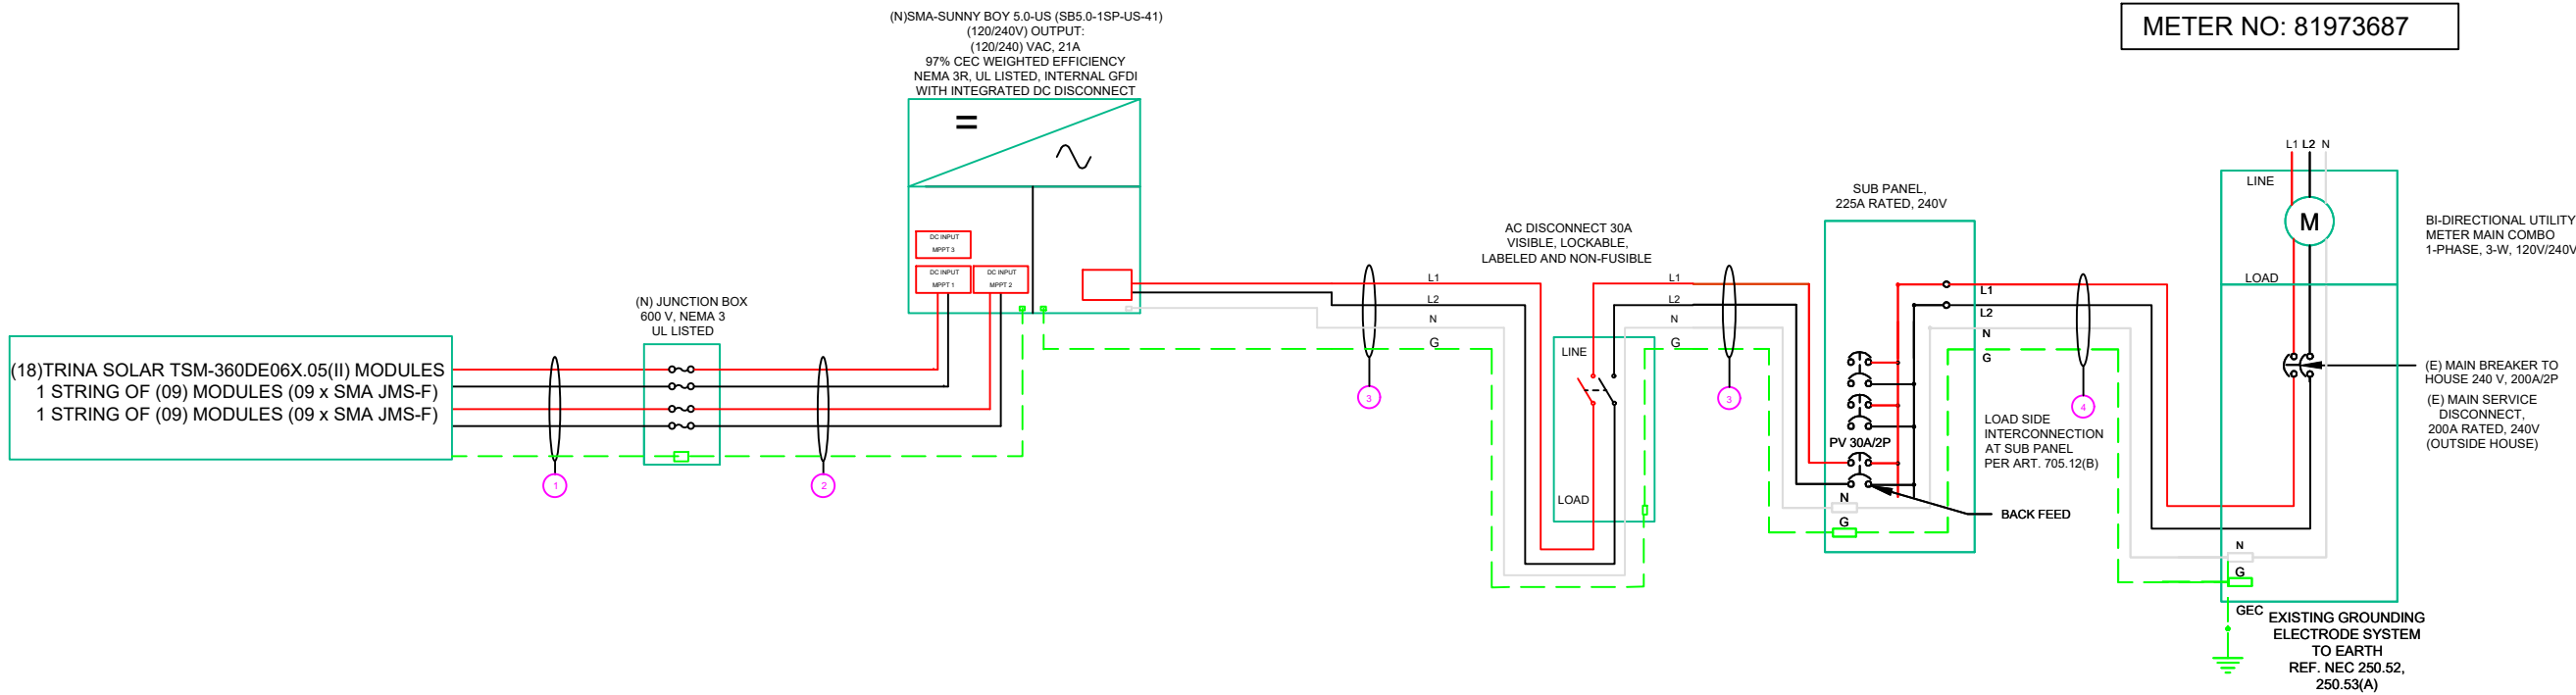

SOLAR BREAKER LOCATED AT THE FURTHEST END OF BUSBAR FROM THE MAIN BREAKER OR FEEDER UNIT

ID	PHASE CONDUCTOR QTY, SIZE AND TYPE PER CONDUIT			GROUND CONDUCTOR QTY, SIZE AND TYPE PER CONDUIT			CONDUIT SIZE	CONDUIT TYPE
1	4	AWG #10	THWN-2	1	AWG #10	THWN-2, COPPER	3/4"	FREE AIR
2	4	AWG #10	THWN-2	1	AWG #10	THWN-2, COPPER	3/4"	EMT
3	3	AWG #10	THWN-2	1	AWG #10	THWN-2, COPPER	3/4"	EMT
4	3	AWG #10	THWN-2	1	AWG #10	THWN-2, COPPER	3/4"	EMT

THIS PLAN HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY SCOTT WYSSLING, PE USING A DIGITAL SIGNATURE AND DATE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

CONTRACTOR



COMPLETE SOLAR
3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN

102 SONORA DR,
LILLINGTON,
NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC



Wyssling Consulting, PLLC
76 N Meadowbrook Drive Alpine UT 84004
North Carolina COA # P-2308

Signed 6-16-22

SHEET TITLE

LINE DIAGRAM

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

E-601

2. PV OVER CURRENT PROTECTION ...NEC 690.9(B)
= TOTAL INVERTER O/P CURRENT x 1.25
= (1 x 21) x 1.25 = 26.25 A
SELECTED OCPD = 30 A ...NEC 240.6

3. 120% RULE FOR BACKFEED BREAKER ...CEC 705.12(B)(2)(3)(b)

MCB + PV BREAKER <= (1.2 x BUS BAR RATING)
(200 + 30) <= 1.2 x 225A
230.00 <= 270.00 HENCE OK


AMBIENT TEMPERATURE SPECS	
RECORD LOW TEMP	-10°
AMBIENT TEMP (HIGH TEMP 2%)	36°
CONDUIT HEIGHT	0.5"
CONDUCTOR TEMPERATURE RATE	90°
MODULE TEMPERATURE COEFFICIENT OF VOC	-0.25%/°C

PERCENT OF VALUES	NUMBER OF CURRENT CARRYING CONDUCTORS
.80	4-6
.70	7-9
.50	10-20

DC WIRE CALCULATION									
WIRE ID	EXPECTED WIRE TEMP (In Celsius)	TEMP. CORRECTION PER TABLE 310.15(B)(2)(a)	NO. OF CURRENT CARRYING CONDUCTORS	CONDUIT FILL CORRECTION PER NEC 310.15(B)(3)(a)	CIRCUIT CONDUCTOR SIZE	CIRCUIT CONDUCTOR AMPACITY @90°(PER FEEDER SET)	REQUIRED CIRCUIT CONDUCTOR AMPACITY PER CEC 690.8(A&B) 1.56 X I _{sc}	DERATED AMPACITY OF CIRCUIT CONDUCTOR PER NEC TABLE 310.16 TEMP. CORRECTION PER TABLE (310.16) X CONDUIT FILL CORRECTION PER NEC 310.15(B)(2)(A) X CIRCUIT CONDUCTOR AMPACITY @90°(PER FEEDER SET)	GROUND WIRE SIZE & GROUND WIRE TYPE
1	36°	0.91	4	1	10 AWG	40A	16.07A	36.40A	#10 THWN-2
2	36°	0.91	4	0.8	10 AWG	40A	16.07A	29.12A	#10 THWN-2

AC WIRE CALCULATION									
WIRE ID	EXPECTED WIRE TEMP (In Celsius)	TEMP. CORRECTION PER TABLE 310.15(B)(2)(a)	NO. OF CURRENT CARRYING CONDUCTORS	CONDUIT FILL CORRECTION PER NEC 310.15(B)(3)(a)	CIRCUIT CONDUCTOR SIZE	CIRCUIT CONDUCTOR AMPACITY @75°(PER FEEDER SET)	REQUIRED CIRCUIT CONDUCTOR AMPACITY PER NEC 690.8(A&B) 1.25 X Inv Qnt.	DERATED AMPACITY OF CIRCUIT CONDUCTOR PER NEC TABLE 310.16 TEMP. CORRECTION PER TABLE (310.16) X CONDUIT FILL CORRECTION PER NEC 310.15(B)(2)(A) X CIRCUIT CONDUCTOR AMPACITY @75°(PER FEEDER SET)	GROUND WIRE SIZE & GROUND WIRE TYPE
3	36°	0.91	3	1	10 AWG	35A	26.25A	31.85A	#10 THWN-2
4	36°	0.91	3	1	10 AWG	35A	26.25A	31.85A	#10 THWN-2

CONTRACTOR



COMPLETE SOLAR
 3000 EXECUTIVE PKWY
 SUITE #504
 SAN RAMON, CA 94583
 PHONE NUMBER:
 (877) 299-4943
 Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN

**102 SONORA DR,
 LILLINGTON,
 NC 27546**

COUNTY:-HARNETT COUNTY

SYSTEM SIZE
 DC SIZE: 6.480 KW DC-(STC)
 AC SIZE: 5.000 KW AC

SHEET TITLE
**ELECTRICAL
 CALCULATIONS**

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER
E-602

**WARNING:
PHOTOVOLTAIC
POWER SOURCE**

LABEL 1
ON ALL CONDUITS SPACED AT MAX 10FT

! WARNING !
ELECTRIC SHOCK HAZARD
DO NOT TOUCH TERMINALS.
TERMINALS ON BOTH LINE AND LOAD SIDES
MAY BE ENERGIZED IN THE OPEN POSITION

LABEL 5
AT EACH AC DISCONNECT

! CAUTION !
SOLAR POINT OF
INTERCONNECTION

LABEL 9
AT UTILITY METER

! CAUTION !
SOLAR ELECTRIC
SYSTEM CONNECTED
AND ENERGIZED

LABEL 2
AT INVERTER

**PHOTOVOLTAIC
AC DISCONNECT**


LABEL 6
AT EACH AC DISCONNECT

! WARNING !
THE SERVICE METER IS ALSO SERVED
BY A PHOTOVOLTAIC SYSTEM

LABEL 10
AT UTILITY METER

**SOLAR PV SYSTEM EQUIPPED
WITH RAPID SHUTDOWN**

TURN RAPID SHUTDOWN
SWITCH TO THE
"OFF" POSITION TO
SHUT DOWN PV SYSTEM
AND REDUCE
SHOCK HAZARD
IN THE ARRAY



LABEL 3
AT INVERTER

! WARNING !
DUAL POWER SOURCES
SECOND SOURCE IS PV SYSTEM


LABEL 7
AT MEP

**PHOTOVOLTAIC
DC DISCONNECT**

LABEL 4
AT DC DISCONNECT

! WARNING !
SOLAR SYSTEM CONNECTED
AND ENERGIZED

LABEL 8
AT MEP

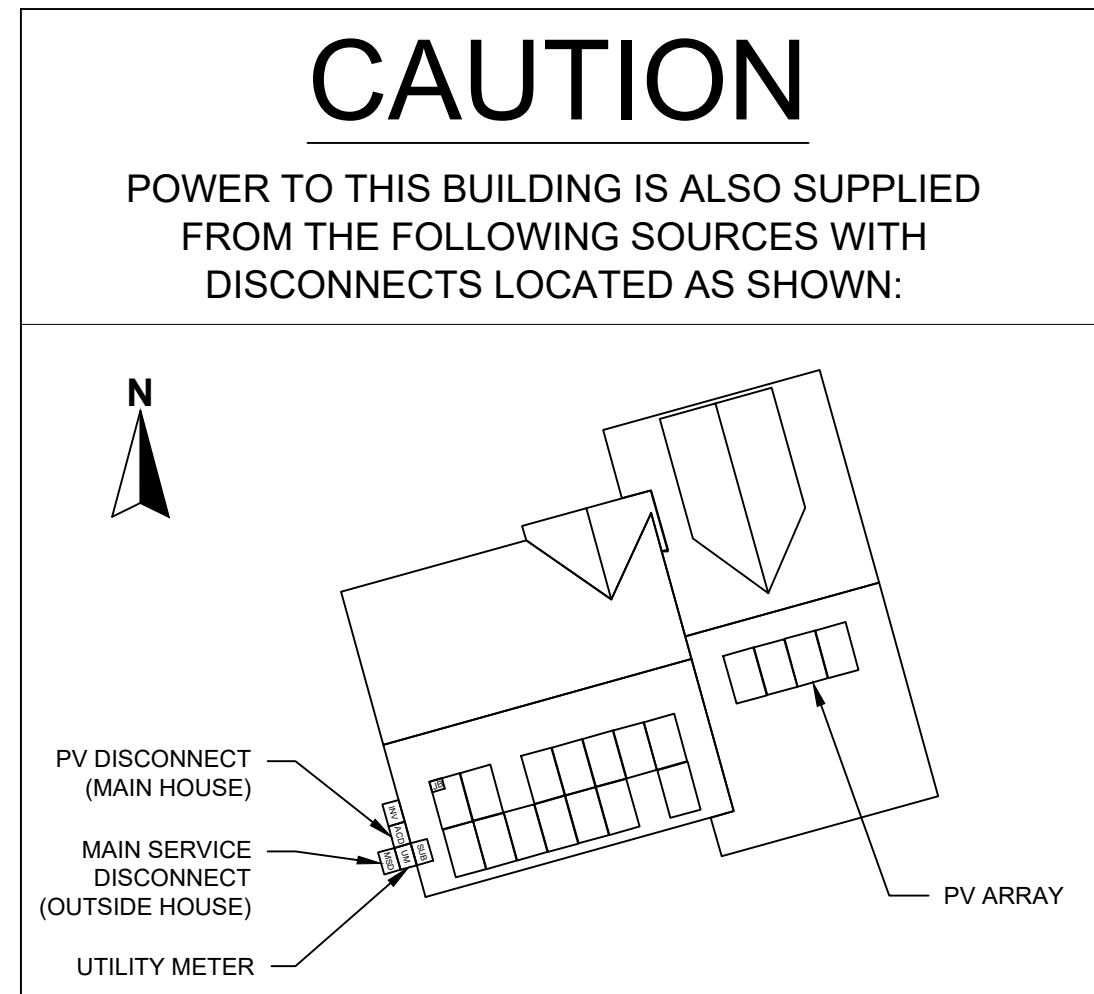

CONTRACTOR



COMPLETE SOLAR

3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN

**102 SONORA DR,
LILLINGTON,
NC 27546**

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC

SHEET TITLE

PLACARD

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

E-603

Mono Multi Solutions

THE Residential Module

MULTI-BUSBAR MONO PERC MODULE



132-Cell
MONOCRYSTALLINE MODULE

355-380W
POWER OUTPUT RANGE

20.6%
MAXIMUM EFFICIENCY

0~+5W
POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading total solution provider for solar energy. With local presence around the globe, Trina Solar is able to provide exceptional service to each customer in each market and deliver our innovative, reliable products with the backing of Trina as a strong, bankable brand. Trina Solar now distributes its PV products to over 100 countries all over the world. We are committed to building strategic, mutually beneficial collaborations with installers, developers, distributors and other partners in driving smart energy together.

Comprehensive Products and System Certificates

IEC61215/IEC61730/IEC61701/IEC62716/UL61730
ISO 9001: Quality Management System
ISO 14001: Environmental Management System
ISO14064: Greenhouse Gases Emissions Verification
OHSAS 18001: Occupation Health and Safety Management System



PRODUCTS | POWER RANGE
TSM-DE06X.05(II) | 355-380W



High power and High Efficiency

- Up to 380W front power and 20.6% module efficiency with half-cut and MBB (Multi Busbar) technology bringing more BOS savings
- Reduce BOS cost with higher power bin and 1500V system voltage



Outstanding visual appearance

- Designed with aesthetics in mind
- High standard Production, Excellent cell color control by dedicated cell blackening treatment and machine selection
- Thinner wires that appear all black at a distance




High reliability

- Ensured PID resistance through cell process and module material control
- Resistant to salt, acid and ammonia
- Mechanical performance: Up to 5400 Pa positive load and 2400 Pa negative load



Certified to withstand the most challenging environmental conditions




- Excellent IAM and low light performance validated by 3rd party with cell process and module material optimization
- Lower temp co-efficient (-0.34%) and NOCT bring more energy leading to lower LCOE
- Better anti-shading performance and lower operating temperature

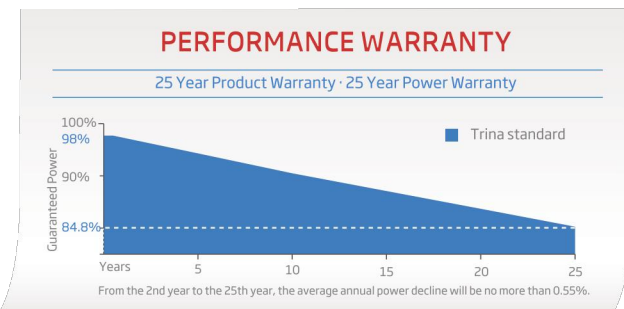


Residential Module

MULTI-BUSBAR MONO PERC MODULE


DIMENSIONS OF PV MODULE(mm)

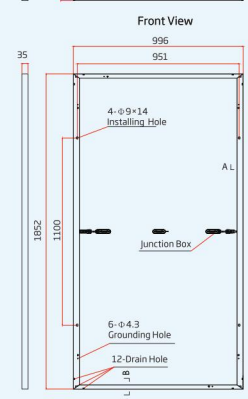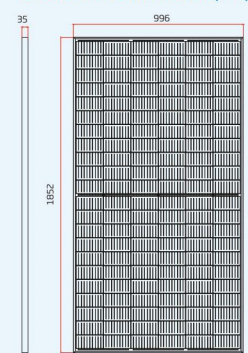

I-V CURVES OF PV MODULE(370W)

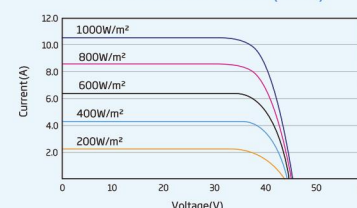

P-V CURVES OF PV MODULE(370W)

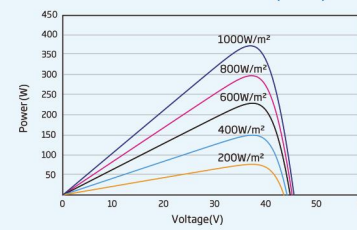

ELECTRICAL DATA (STC)

	355	360	365	370	375	380
Peak Power Watts- P_{MAX} (Wp)*	355	360	365	370	375	380
Power Output Tolerance- P_{MAX} (W)	0 ~ +5					
Maximum Power Voltage- V_{MPP} (V)	36.8	37.0	37.2	37.4	37.6	37.8
Maximum Power Current- I_{MPP} (A)	9.66	9.74	9.82	9.90	9.98	10.07
Open Circuit Voltage- V_{OC} (V)	44.6	44.8	45.0	45.2	45.3	45.5
Short Circuit Current- I_{SC} (A)	10.24	10.30	10.35	10.40	10.45	10.51
Module Efficiency η_m (%)	19.2	19.5	19.8	20.1	20.3	20.6

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AML5.
*Measurement tolerance: ±3%.

ELECTRICAL DATA (NOCT)

	268	272	276	279	283	287
Maximum Power- P_{MAX} (Wp)	268	272	276	279	283	287
Maximum Power Voltage- V_{MPP} (V)	34.4	34.7	34.9	35.1	35.3	35.6
Maximum Power Current- I_{MPP} (A)	7.80	7.85	7.90	7.96	8.01	8.06
Open Circuit Voltage- V_{OC} (V)	42.0	42.2	42.4	42.6	42.6	42.8
Short Circuit Current- I_{SC} (A)	8.25	8.30	8.34	8.38	8.42	8.47

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
Cell Orientation	132 cells
Module Dimensions	1852 × 996 × 35 mm (72.91 × 39.21 × 1.38 inches)
Weight	19.7 kg (43.4 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant Material	EVA
Backsheet	Black-White
Frame	35 mm (inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: N 280mm/P 280mm(11.02/11.02inches) Landscape: N 1400 mm /P 1400 mm (55.12/55.12 inches)
Connector	MC4 EVO2
Fire Type	Type 2

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P_{MAX}	- 0.34%/°C
Temperature Coefficient of V_{OC}	- 0.25%/°C
Temperature Coefficient of I_{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	20A

WARRANTY

- 25 year Product Workmanship Warranty
- 25 year Linear Power Warranty

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

- Modules per box: 31 pieces
- Modules per 40' container: 744 pieces

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© 2020 Trina Solar Limited. All rights reserved. Specifications included in this datasheet are subject to change without notice.
Version number: TSM_DE06X.05(II)_NA_2020_PA3 www.trinasolar.com



CONTRACTOR



COMPLETE SOLAR

3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN

102 SONORA DR,
LILLINGTON,
NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC

SHEET TITLE
**RESOURCE
DOCUMENT**

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

R-001

SUNNY BOY 3.0-US / 3.8-US / 5.0-US / 6.0-US / 7.0-US / 7.7-US



SB3.0-1SP-US-41 / SB3.8-1SP-US-41 / SB5.0-1SP-US-41 / SB6.0-1SP-US-41
 SB7.0-1SP-US-41 / SB7.7-1SP-US-41 / SB3.0-1TP-US-41 / SB3.8-1TP-US-41
 SB5.0-1TP-US-41 / SB6.0-1TP-US-41 / SB7.0-1TP-US-41 / SB7.7-1TP-US-41



Value-Added Improvements

- SunSpec certified technology for cost-effective module-level shutdown
- Advanced AFCI compliant to UL 1699B for arc fault protection

Reduced Labor

- New Installation Assistant with direct access via smartphone minimizes time in the field
- Advanced communication interface with fewer components creates 50% faster setup and commissioning

Optimized Power Production

- ShadeFix, SMA's proprietary shade management solution, produces more power than alternatives
- Reduced component count provides maximum system reliability

Trouble-Free Service

- SMA Service Mobile App provides simplified, expedited field service
- Equipped with SMA Smart Connected, a proactive service solution that is integrated into Sunny Portal

SUNNY BOY 3.0-US / 3.8-US / 5.0-US / 6.0-US / 7.0-US / 7.7-US

Power with a purpose

The residential PV market is changing rapidly. Your bottom line matters more than ever—so we've designed a superior residential solution to help you decrease costs at every stage of your business operations. The Sunny Boy 3.0-US/3.8-US/5.0-US/6.0-US/7.0-US/7.7-US join the SMA lineup of field-proven solar technology backed by the world's #1 service team. This improved residential solution features ShadeFix, SMA's proprietary technology that optimizes system performance. ShadeFix also provides superior power production with a reduced component count versus competitors, which provides maximum reliability. No other optimized solution generates more power or is as easy as systems featuring SMA ShadeFix and SunSpec certified devices. Finally, SMA Smart Connected will automatically detect errors and initiate the repair and replacement process so that installers can reduce service calls and save time and money.

www.SMA-America.com

Technical data	Sunny Boy 3.0-US		Sunny Boy 3.8-US		Sunny Boy 5.0-US	
	208 V	240 V	208 V	240 V	208 V	240 V
Input (DC)						
Max. PV power	4800 Wp		6144 Wp		8000 Wp	
Max. DC voltage	600 V		600 V		600 V	
Rated MPP voltage range	155 - 480 V		195 - 480 V		220 - 480 V	
MPPT operating voltage range	100 - 550 V		100 - 550 V		100 - 550 V	
Min. DC voltage / start voltage	100 V / 125 V		100 V / 125 V		100 V / 125 V	
Max. operating input current per MPPT	10 A		10 A		10 A	
Max. short circuit current per MPPT	18 A		18 A		18 A	
Number of MPPT tracker / string per MPPT tracker	2 / 1		2 / 1		3 / 1	
Output (AC)						
AC nominal power	3000 W	3000 W	3330 W	3840 W	5000 W	5000 W
Max. AC apparent power	3000 VA	3000 VA	3330 VA	3840 VA	5000 VA	5000 VA
Nominal voltage / adjustable	208 V / ●	240 V / ●	208 V / ●	240 V / ●	208 V / ●	240 V / ●
AC voltage range	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V
AC grid frequency	60 Hz / 50 Hz		60 Hz / 50 Hz		60 Hz / 50 Hz	
Max. output current	14.5 A	12.5 A	16.0 A	16.0 A	24.0 A	21.0 A
Power factor (cos φ) / harmonics	1 / < 4 %		1 / < 4 %		1 / < 4 %	
Output phases / line connections	1 / 2		1 / 2		1 / 2	
Efficiency						
Max. efficiency	97.2 %	97.6 %	97.3 %	97.6 %	97.3 %	97.6 %
CEC efficiency	96.0 %	96.5 %	96.5 %	96.5 %	96.5 %	97.0 %
Protection devices						
DC disconnect device / DC reverse polarity protection			● / ●			
Ground fault monitoring / Grid monitoring			●			
AC short circuit protection			●			
All-pole sensitive residual current monitoring unit (RCMU)			●			
Arc fault circuit interrupter (AFCI)			●			
Protection class / overvoltage category			I / IV			
General data						
Dimensions (W / H / D) in mm (in)			535 x 730 x 198 (21.1 x 28.5 x 7.8)			
Packaging dimensions (W / H / D) in mm (in)			600 x 800 x 300 (23.6 x 31.5 x 11.8)			
Weight / packaging weight			26 kg (57 lb) / 30 kg (66 lb)			
Temperature range: operating / non-operating			-25°C ... +60°C / -40°C ... +60°C			
Environmental protection rating			NEMA 3R			
Noise emission (typical)			39 dB(A)			
Internal power consumption at night			< 5 W			
Topology / cooling concept			transformerless / convection			
Features						
Ethernet ports			2			
Secure Power Supply			● 1)			
Display (2 x 16 characters)			●			
2.4 GHz WLAN / External WLAN antenna			▲ / ○			
ShadeFix technology for string level optimization			●			
Cellular (4G / 3G) / Revenue Grade Meter			○ / ○ 2)			
Warranty: 10 / 15 / 20 years			● / ○ / ○ 3)			
Certificates and approvals			UL 1741, UL 1741 SA incl. CA Rule 21 RSD, UL 1998, UL 1699B Ed. 1, IEEE1547, FCC Part 15 (Class A & B), CAN/CSA V22.2 107.1-1, HECO Rule 14H, PV Rapid Shutdown System Equipment			
Legend			● Standard features ○ Optional features — Not available ▲ Subject to availability			
Data at nominal conditions			1) Not compatible with SunSpec shutdown devices 2) Standard in SBX.X-1TP-US-41			
Type designation	SB3.0-1SP-US-41 / SB3.0-1TP-US-41		SB3.8-1SP-US-41 / SB3.8-1TP-US-41		SB5.0-1SP-US-41 / SB5.0-1TP-US-41	



External WLAN antenna
EXTANT-US-40



SunSpec Certified
Rapid Shutdown
Receivers




Revenue Grade
Meter Kit
RGM05KIT-US-10



Cellular Modem Kit
CELLMODKIT-US-10

3) Listed warranty terms are applicable in SMA-designated primary support countries, including the U.S., Canada, and Mexico. Reduced terms or restrictions may apply in other Americas regions and territories including the Pacific and Caribbean.

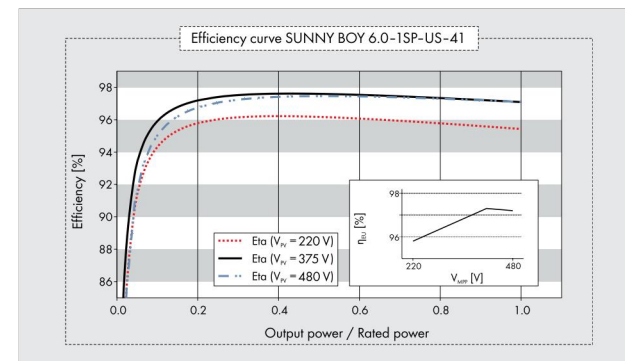

CONTRACTOR



COMPLETE SOLAR

3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN
102 SONORA DR,
LILLINGTON,
NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC

SHEET TITLE RESOURCE DOCUMENT

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

R-002

JMS-F SUNSPEC RAPID SHUTDOWN DEVICE



JMS-F



IMAGE FOR ILLUSTRATIVE PURPOSES ONLY



Cost-effective

- Simple plug-and-play installation
- No additional components necessary, reducing balance of system costs

Simple and robust

- Power line based communication certified for compatibility with the SunSpec signal for rapid shutdown
- Shuts down PV module whenever SunSpec signal is interrupted

Safe and certified

- Certified and listed for compliance to:
 - › UL 1741 Rapid Shutdown System Equipment
 - › NEC 2017 690.12(B)(2) Module Level Shutdown

Reduced risk

- Technical support from SMA's #1 ranked service organization
- Fully SunSpec certified solution when paired with an SMA SunSpec certified inverter


JMS-F SUNSPEC RAPID SHUTDOWN DEVICE

The easy module level rapid shutdown solution

The SunSpec Certified Rapid Shutdown System (model JMS-F), available from SMA, is the most cost-effective and reliable solution for fulfilling NEC 2017 module level shutdown requirements. The module-level device is certified for compatibility with the SunSpec communication signal and SMA inverters, making compliance simple and easy. By using the existing DC lines between the inverter and PV array for power line communications, installation and labor are significantly reduced. No additional wires or communication equipment is needed. The solution also features up to 50% fewer internal components vs alternatives, resulting in greater lifetime reliability.

www.SMA-America.com

Technical data	JMS-F
Input (DC)	
Rated DC input power	600 Wp
Maximum PV module open circuit voltage	60 V
Minimum input voltage	10 V
Maximum continuous input current I _{MAX}	15 A
Maximum short-circuit input current I _{SC}	15 A
Output (DC)	
Output power range	0 W to 600 W
Maximum output voltage	60 V
Standby output voltage	1 V
Maximum system voltage	1500 V
Allowable series string connections	6 to 30 JMS-F devices
Mechanical	
Dimensions L / W / H in mm (in)	89 x 88.5 x 23.1 (3.5 x 3.48 x 0.9)
Weight (including cables)	0.95 lb (435 g)
Input / output connector	MC4
Output wire length	1.2 m
Operating temperature range	-40° C to +75° C (-40° F to +167° F)
Enclosure rating	Type 4X (as per UL 50E)
Relative humidity	0% to 100%
Features and compliance	
Certification	UL 1741 Rapid Shutdown Equipment
Communication mode	Power Line Communication (PLC)
SunSpec Rapid Shutdown Communication Protocol	SunSpec certified
Rapid shutdown time	10 seconds
Warranty (contact SMA Service Line)	25 years
SunSpec certified SMA inverters	Sunny Boy US (SBx.x-1SP-US-41) Sunny Tripower CORE1-US (STP xx-US-41)
Type designation	JMS-F
SMA part number	119814-00.01
Package quantity	40

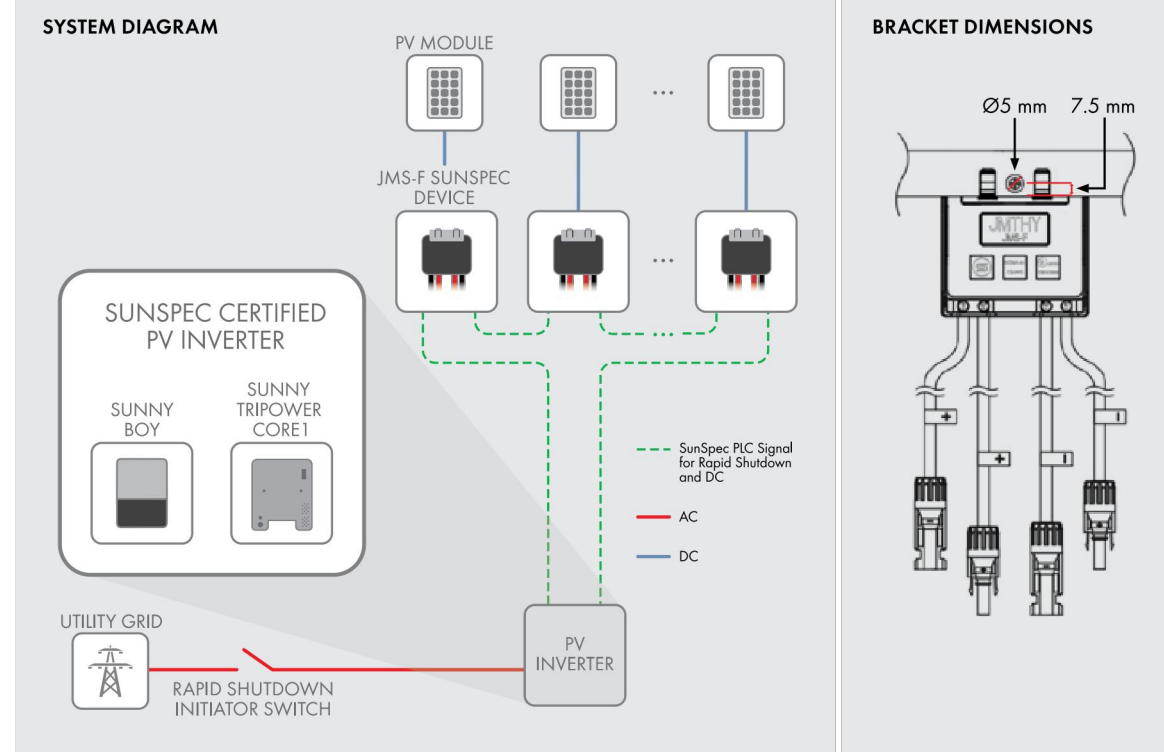

Toll Free +1 888 4 SMA USA
www.SMA-America.com

SMA America, LLC

SMA SunSpecSDSe-19 - SMA and Sunny Boy are registered trademarks of SMA Solar Technology AG. JMS-F manufactured by WIRTH Technology Co., Ltd. China for SMA America, LLC. Printed on FSC-certified paper. All products and services identified as well as technical data are subject to change, even for reasons of country-specific deviations, at any time without notice. SMA assumes no liability for errors or omissions. For current information, see www.SMA-Substation.com.

CONTRACTOR



COMPLETE SOLAR

3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN
**102 SONORA DR,
LILLINGTON,
NC 27546**

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC

SHEET TITLE RESOURCE DOCUMENT

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

R-003




XR Rail Family

Solar Is Not Always Sunny


Over their lifetime, solar panels experience countless extreme weather events. Not just the worst storms in years, but the worst storms in 40 years. High winds capable of ripping panels from a roof, and snowfalls weighing enough to buckle a panel frame.

XR Rails are the structural backbone preventing these results. They resist uplift, protect against buckling and safely and efficiently transfer loads into the building structure. Their superior spanning capability requires fewer roof attachments, reducing the number of roof penetrations and the amount of installation time.

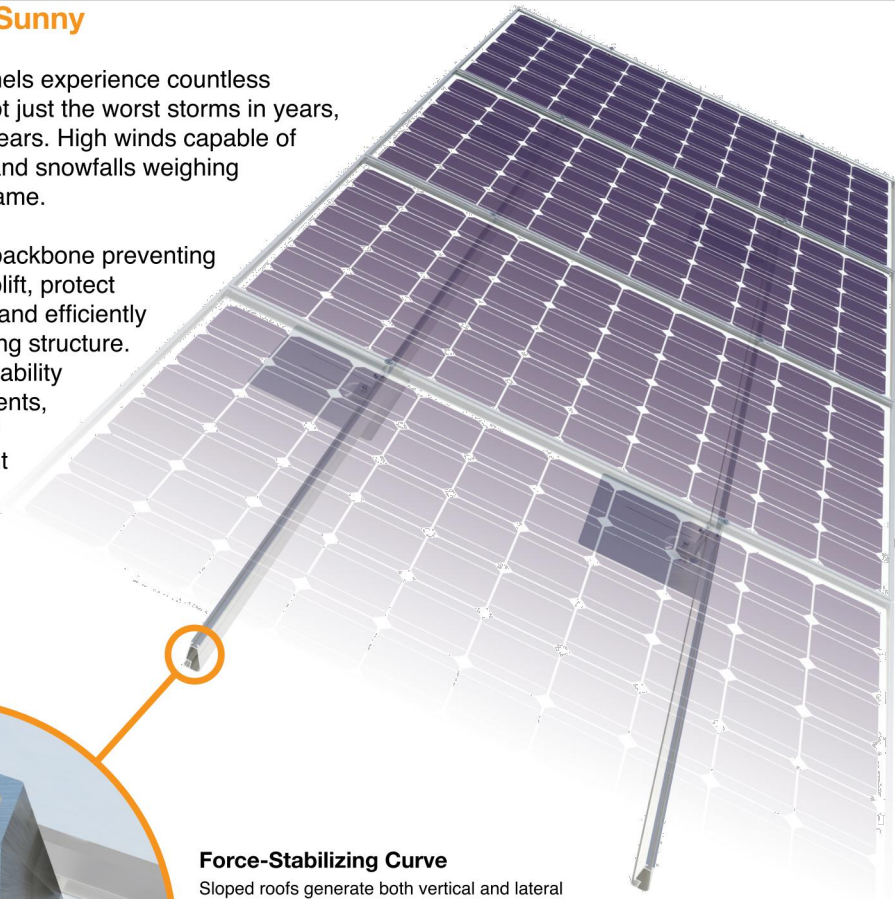

Force-Stabilizing Curve

Sloped roofs generate both vertical and lateral forces on mounting rails which can cause them to bend and twist. The curved shape of XR Rails is specially designed to increase strength in both directions while resisting the twisting. This unique feature ensures greater security during extreme weather and a longer system lifetime.

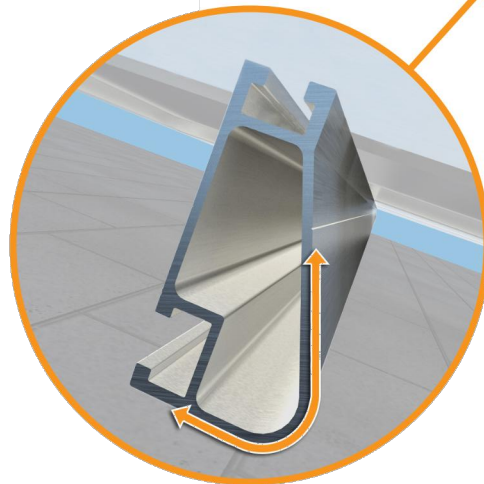


Compatible with Flat & Pitched Roofs



Corrosion-Resistant Materials

All XR Rails are made of 6000-series aluminum alloy, then protected with an anodized finish. Anodizing prevents surface and structural corrosion, while also providing a more attractive appearance.



XR10 Rail

See Description / Length

Rail Section Properties	
Property	Value
Total Cross-Sectional Area	0.363 in ²
Section Modulus (X-axis)	0.136 in ³
Moment of Inertia (X-axis)	0.124 in ⁴
Moment of Inertia (Y-axis)	0.032 in ⁴
Torsional Constant	0.076 in ³
Polar Moment of Inertia	0.033 in ⁴

Clear Part Number	Black Part Number	Description / Length	Material	Weight
XR-10-132A	XR-10-132B	XR10, Rail 132" (11 Feet)	6000-Series Aluminum	4.67 lbs.
XR-10-168A	XR-10-168B	XR10, Rail 168" (14 Feet)		5.95 lbs.
XR-10-204A	XR-10-204B	XR10, Rail 204" (17 Feet)		7.22 lbs.

v1.0

CONTRACTOR



COMPLETE SOLAR

3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN
**102 SONORA DR,
LILLINGTON,
NC 27546**

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC

SHEET TITLE
**RESOURCE
DOCUMENT**


DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

R-004


L-Foot

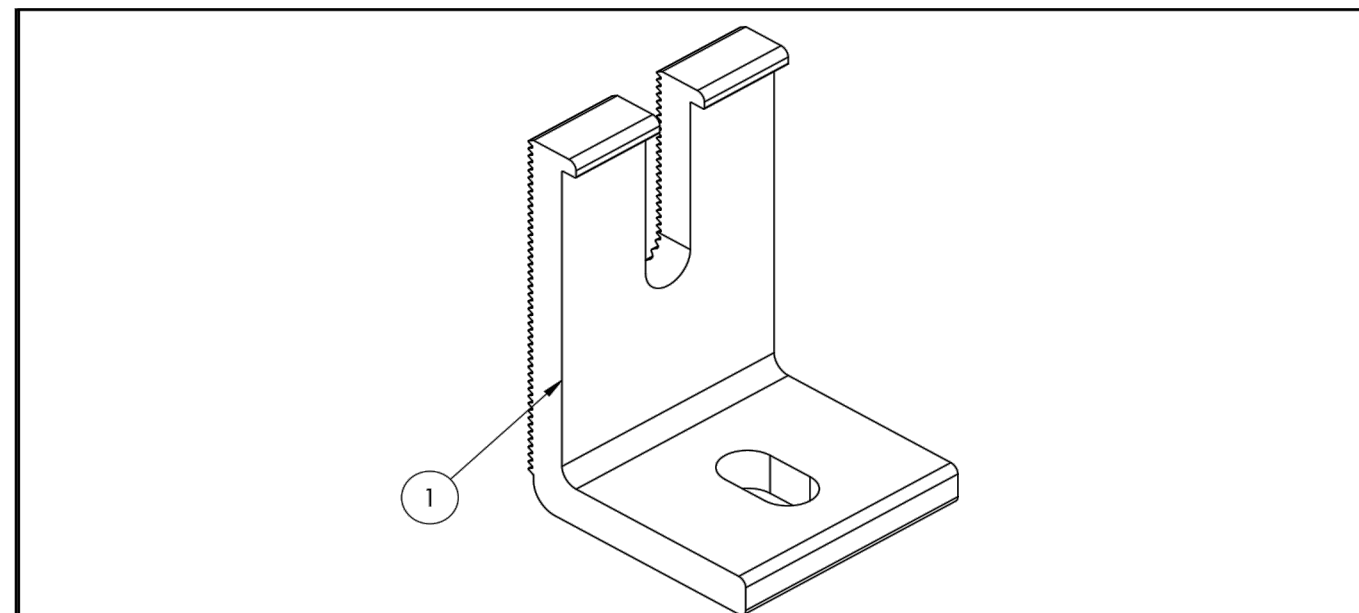

ITEM NO	DESCRIPTION	QTY IN KIT
1	FOOT, EXTRUDED L - SLOTTED	4

PART NUMBER	DESCRIPTION
FM-LFT-003	Kit, 4Pcs, Slotted L-Foot, Mill
FM-LFT-003-B	Kit, 4Pcs, Slotted L-Foot, Black

1) Foot, Extruded L - Slotted

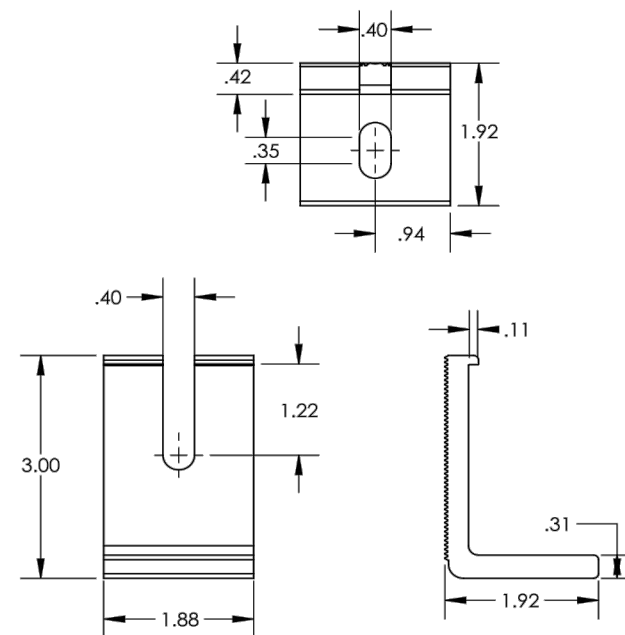

v1.11

CONTRACTOR



COMPLETE SOLAR

3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN

102 SONORA DR,
LILLINGTON,
NC 27546

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC

SHEET TITLE
**RESOURCE
DOCUMENT**

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

R-005

RT-MINI

Self-flashing base for asphalt & metal roof-top PV mounting systems

RT-MINI is suitable for mounting any rail system with a conventional L-Foot.




Dual bolt design: M8 or 5/16" for L-Foot & 1/4" for EMC



Installation Manual



Roof Tech
The Standard for Waterproof Flexible Flashing Since 1994
www.roof-tech.us info@roof-tech.us

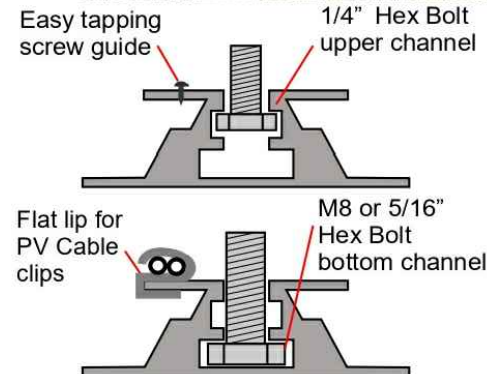

RT-MINI

Flexible Flashing certified by the International Code Council (ICC)

Engineered to ASTM D 1761 (Standard Test Methods for Mechanical Fasteners in Wood)

Components

RT2-00-MINIBK





MINI base : 20 ea.
Screw : 40 ea.
Extra RT-Butyl : 10 ea.

Optional item

5 x 60mm Mounting screw (RT2-04-SD5-60) : 100 ea./Bag
5/16" Hex bolt, washer & nut set (RT-04-BN30SL-US) : 100 ea./Bag
RT-Butyl (RT2-04-BUTYLT) : 10 ea./Box

RT-Butyl is Roof Tech's flexible flashing used in one million residential PV systems for the last 26 years. It is the first PV mounting system with Flexible Flashing certified by the ICC. Engineered to withstand wind speeds up to 180 mph and ground snow up to 90 psf.

Metal Flashing Retrofit Flexible Flashing




Shedding water? **100% Waterproof**


ICC ESR-3575 ASTM2140 testing UV testing (7500 hrs.)




Dimensions in (mm)

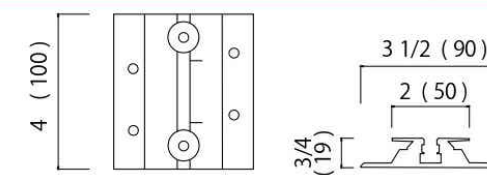

Rafter installation

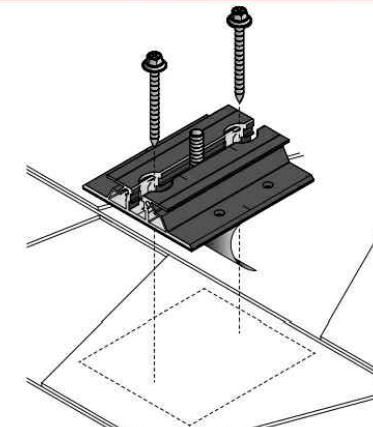

Deck installation

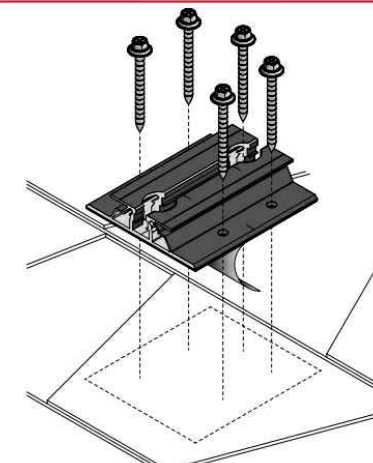

P.E. Stamped Letters available at www.roof-tech.us/support
TAS 100 A on metal and asphalt roof.

CONTRACTOR



COMPLETE SOLAR

3000 EXECUTIVE PKWY
SUITE #504
SAN RAMON, CA 94583
PHONE NUMBER:
(877) 299-4943
Lic# 961988

PROJECT NAME & ADDRESS

ROBERT ALLEN
**102 SONORA DR,
LILLINGTON,
NC 27546**

COUNTY:-HARNETT COUNTY

SYSTEM SIZE

DC SIZE: 6.480 KW DC-(STC)
AC SIZE: 5.000 KW AC

SHEET TITLE RESOURCE DOCUMENT

DRAWN DATE 6/10/2022

DRAWN BY AP

SHEET NUMBER

R-006

Roof Tech Inc.

www.roof-tech.us info@roof-tech.us
10620 Treena Street, Suite 230, San Diego, CA 92131
858.935.6064

March 2020