

solar^{edge} SE5000H – US

**Grid Support Utility Interactive
Non – Isolated Photovoltaic Inverter**

Operating Voltage Range

270 – 480V_{ac}

Max Input Current

13.5A_{dc}

Max Continuous Output Power

5000W_{ac}

Voltage Min – Nom – Max

271 – 240 – 264V_{ac}
Vac

Max Continuous Output Current

26A_{ac}

Max Output Fault Current

0A_{ac}

Max Utility Backfeed Current

59.3 – 60.0 – 60.5Hz

Frequency Min – Nom – Max

+ / – 0.85 – 1

Output Power Factor

60 C

Max Ambient Temperature

IP65 / Type 3R

Enclosure

With integrated ground fault protection per NEC 690.35 (C)

Type 1 Photovoltaic Ac – Fault Circuit – Protection

Wi – Fi Password: q2YEc190

Activation: s0i9aDf1dyUx2BjHJKhJgS0Plg =


WiFi MAC:

48:0B:B2:52:0E:F6

ZigBee MAC:



PN: SE5000H – US000BN04
SN: SJ4819 – 073071442 – D0

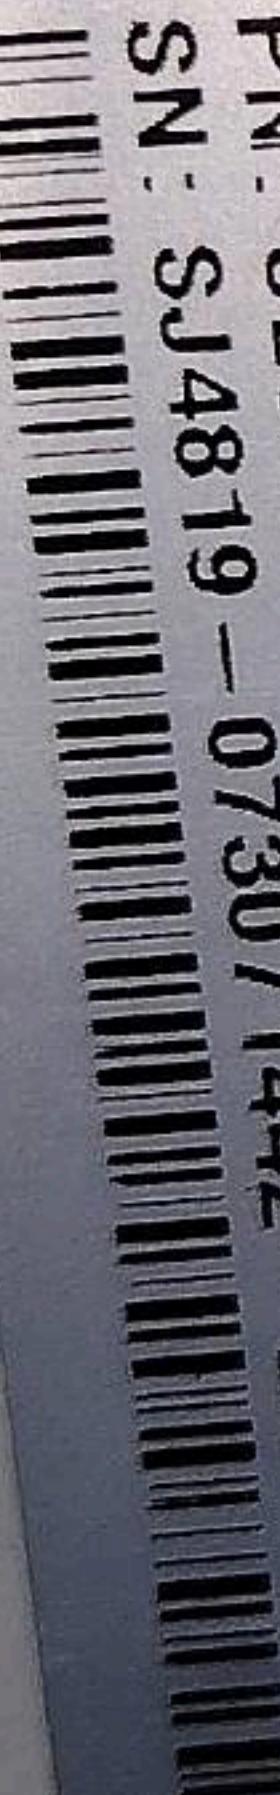

solar^{edge}

PHOTOVOLTAIC RAPID
INVERTER













