

01-5-1212

OPERATIONS PERMIT

Name: (owner) PINE GROVE DEV. New Installation Septic Tank
 Property Location: SR# 1141 Repairs Nitrification Line
 Subdivision HEATHER BROOK Lot # 66
 TAX ID# _____ Quadrant # _____
 Contractor: TED BROWN Registration # _____

Basement with Plumbing: Garage:
 Water Supply: Well Public Community
 Distance From Well: 100 ft.


Following are the specifications for the sewage disposal system on above captioned property.

Type of system: Conventional Other PUMP TO CONVENTIONAL
 Size of tank: Septic Tank: 1000 gallons Pump Tank: _____ gallons
 Subsurface Drainage Field: No. of ditches 3 exact length of each ditch 70 ft. width of ditches 3 ft. depth of ditches 18-24 in.
 French Drain: _____ Linear feet

Date: 7-24-01

PERMIT NO. 17614

Inspected by: [Signature]
Environmental Health Specialist

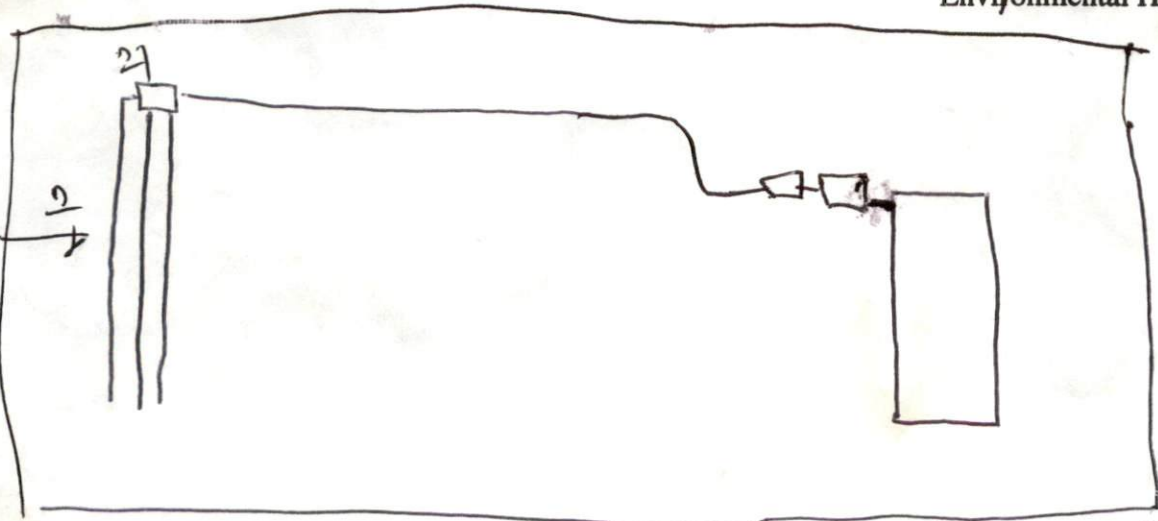

Alarm
Pump
Alarm
Box JHW

* LINES CHECKED ON 7/11