

IMPROVEMENT PERMIT

02-5-4020

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No Person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) ANDRAE Kelly
Property Location: SR# 1001 Wild Plum (Turn At Hancock Spd Pt)
Subdivision Lot #

- New Installation
Septic Tank
Repairs
Nitrification Line

Tax ID # Quadrant #
Number of Bedrooms Proposed: 3 (14x80) Lot Size: 1.79 AC


Basement with Plumbing: Garage:
Water Supply: Well Public Community
Distance From Well: 50 ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other
Size of tank: Septic Tank: 1000 gallons Pump Tank: gallons
Subsurface No. of 1 exact length 200 width of 3 depth of 18.24 in.
Drainage Field ditches of each ditch ft. ditches ft. ditches in.
French Drain Required: Linear feet

Date: 02-21-02
Signed: [Signature] Environmental Health Specialist

This permit is subject to revocation if site plans or intended use change.

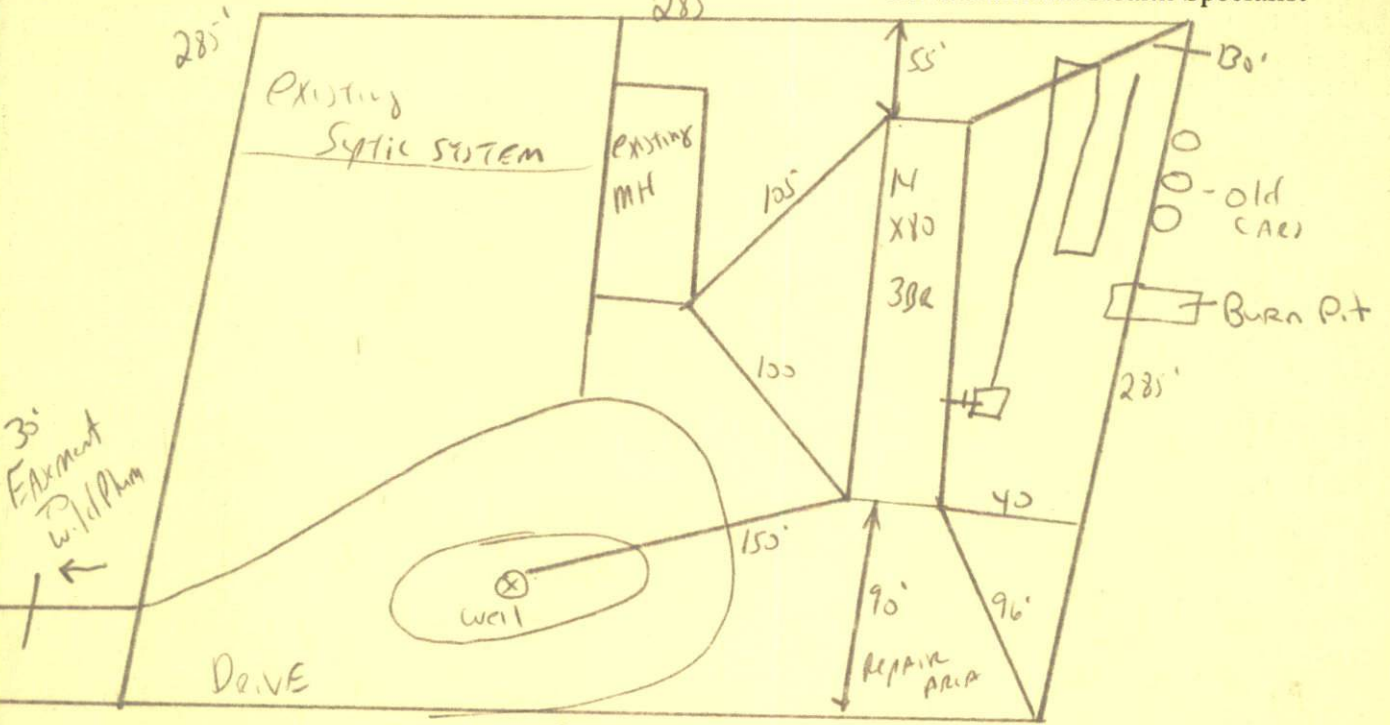

STUB out Plumbing shallow - 18" Ditch Depth - MAINTAIN ALL SET BACKS
Follow contours - DO NOT DRIVE OR PARK ON SEPTIC SYSTEM

