

# IMPROVEMENT PERMIT 03-5-5342

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No Person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) Ronald R. Johnson Jr

New Installation  Septic Tank

Property Location: SR# 1126 Buell Farm Rd

Repairs  Nitrification Line

Subdivision \_\_\_\_\_ Lot # 1

Tax ID # \_\_\_\_\_ Quadrant # \_\_\_\_\_

Number of Bedrooms Proposed: 2 (12 x 68) Lot Size: 5.77 AC

Basement with Plumbing:  Garage:  NOTE SITE IS Limited To

Water Supply:  Well  Public  Community 2 Bedroom Home only!!

Distance From Well: 50 ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system:  Conventional  Other Ultra Shallow

Size of tank: Septic Tank: 1000 gallons Pump Tank: \_\_\_\_\_ gallons

Subsurface Drainage Field No. of ditches 2 exact length of each ditch 135 ft. width of ditches 3 ft. depth of ditches 12 in. <sup>MAX</sup>

French Drain Required: \_\_\_\_\_ Linear feet

SR 1126

Date: 9-16-02

**This permit is subject to revocation if site plans or intended use change.**

Signed: [Signature]


Environmental Health Specialist

MUST meet septic tank install on site before installing septic system

12" MAX Ditch Depth MUST BE IN 8 TO 12" of approved cover soil  
DO NOT DRIVE OR PARK ON SEPTIC SYSTEM Ditch

Do not Remove flags that mark SYSTEM OUT IF Flags Are Removed You will Be Required To get consultant To Re-Flag

MAINTAIN All set Backs  
NOTE This site is Limited To 2 Bed Room Home only

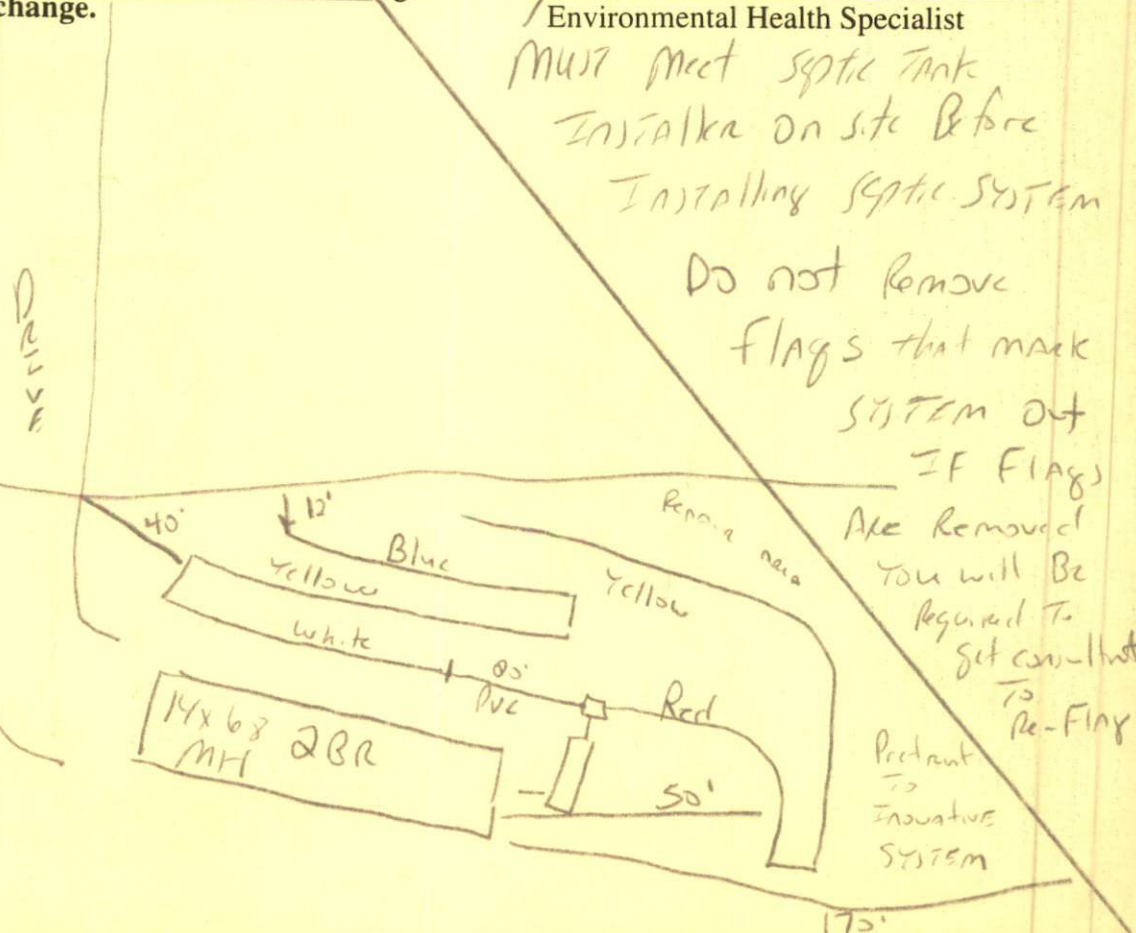

HARNETT COUNTY HEALTH DEPARTMENT  
AUTORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Health Department, Improvement Permit # 19596. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. This authorization will be invalid if ownership, site plans, or intended use change.

Name Ronald R. Johnson Jr Telephone # 893-5420

Address \_\_\_\_\_

Property Location SR# 1126 Road Name \_\_\_\_\_

Subdivision \_\_\_\_\_ Lot # 1 # Bedrooms Proposed 2 (12x68) Lot size 5.77Ac

TYPE OF SYSTEM

New Installation  Repair  Septic Tank  Nitrification Lines  
 Conventional Other ultra shallow  Basement  With Plumbing  Without Plumbing  
Water Supply:  Well  Public - Minimum Well Setback: 50 Ft.  
Septic Tank 700 Pump Chamber \_\_\_\_\_

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 1 # of lines per field 2 Length of lines 135 Ft.  
Width of ditches 3 ft. Depth of ditches 12 max inches  
French Drain: Linear feet required \_\_\_\_\_ Depth of gravel \_\_\_\_\_

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

Signature of Authorized Agent for Harnett County [Signature] Date 9-16-02