

201222201557401064

ENGINEERED, DESIGNED AND QUALITY TESTED BY Q CELLS IN GERMANY
Q.PEAK DUO BLK ML-G10+ 400

PERFORMANCE AT STANDARD TEST CONDITIONS*

Nominal Power* (+5W/-0W)	P_{MPP}	[W]	400
Short circuit current*	I_{SC}	[A]	11.14
Open circuit voltage*	V_{OC}	[V]	45.30
Current at maximum power	I_{MPP}	[A]	10.77
Voltage at maximum power	V_{MPP}	[V]	37.13
Maximum system voltage	V_{SYS}	[V]	1000 (IEC) 1000 (UL)
Weight	M	[kg / lbs]	22.0 / 48.5

Q CELLS

Assembled in USA



DANGER!
Risk of electric shock!
DO NOT connect or disconnect plug contacts while system is under load current. Refer to the Installation and Operation Manual before installing, operating or servicing this unit.

DANGER!
Risque de choc électrique!
NE PAS connecter ou déconnecter les connecteurs lorsque le système est en charge. Consultez le manuel d'installation et d'utilisation avant installation, utilisation et entretien du produit.

Fire Rating: Class C / Type 2
Design load: 55 lbs/ft²
Fuse Rating: 20 A
For field connections, use minimum No.12 AWG copper wires insulated for a minimum of 90 °C


U.S. Patent No. 9,893,215 (solar cells)

EMAIL service@q-cells.com
WEB www.q-cells.com

*Measurement tolerances: $P_{MPP} \pm 3\%$; I_{SC} , $V_{OC} \pm 5\%$ at STC: 1000 W/m², 25±2 °C, AM 1.5 according to IEC 60904-3. Data given are rated (nominal) values. IEC 61215:2016; IEC 61730:2016.



www.tuv.com
ID1111220277

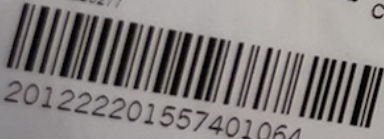

201222201557401064

Hanwha Q CELLS USA Inc.,
300 Nexus Drive, Dalton GA 30721, USA
Certification holder: Hanwha Q CELLS GmbH