

HTE 04-5-9346

IMPROVEMENT PERMIT

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No Person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) CHOO CHOO HOMES New Installation Septic Tank
 Property Location: SR# 2018 BETHEL BAPTIST RD Repairs Nitrification Line

Subdivision TALL OAKS Lot # 2

Tax ID # _____ Quadrant # _____

Number of Bedrooms Proposed: 3 Lot Size: 1.03 AC

Basement with Plumbing: Garage:

Water Supply: Well Public Community

Distance From Well: 100 ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other PUMP TO CONVENTIONAL W/ MAN-A-TEE DIST.


Size of tank: Septic Tank: 1000 gallons Pump Tank: 1000 gallons

Subsurface Drainage Field: No. of ditches 3 exact length of each ditch 80 ft. width of ditches 3 ft. depth of ditches 18 in.

French Drain Required: _____ Linear feet

Date: 5/7/04
 Signed: [Signature] RS (OLIVER TOLKSON)
 Environmental Health Specialist

This permit is subject to revocation if site plans or intended use change.

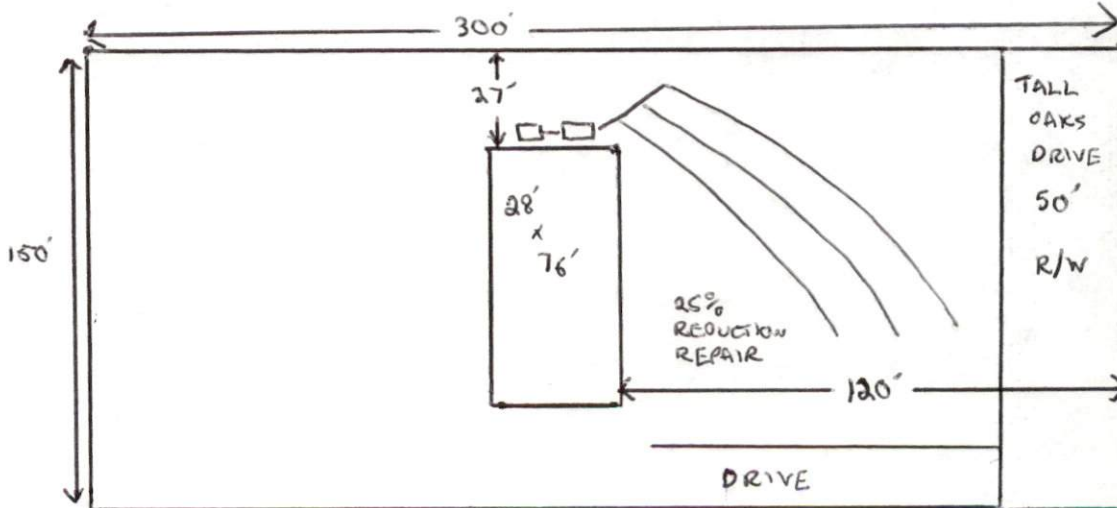

- * MAINTAIN ALL SETBACKS
- * CALL WITH ANY QUESTIONS PRIOR TO INSTALLATION
- * PUMP SPECS
40 gpm @ 9.5 TDM
- * MAN-A-TEE SPECS
 - 3/4" SCH 40 VALVES
 - 2' PRESSURE HEAD
 - USE BOX FOR MANATEE

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH
AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 20805. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. *This authorization will be invalid if ownership, site plans, or intended use change.*

CHOO CHOO HOMES 860-8781
Name Telephone #

4209 BRAGG BLVD. FAYETTEVILLE NC 28303
Address

2048 BETHEL BAPTIST RD
Property Location SR# Road Name

TALL OAKS 2 3 1.03AC
Subdivision Lot # # Bedrooms Proposed Lot Size

TYPE OF SYSTEM

New Installation [] Repair Septic Tank Nitrification Lines

[] Conventional Other PUMP TO CONVENTIONAL

[] Basement [] With Plumbing [] Without Plumbing

Water Supply: [] Well Public Water Supply Minimum Well Setback: 100 Ft.

Septic Tank 1000 gal Pump Chamber 1000 gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 1 # of lines per field 3 Length of lines 80 Ft.

Width of ditches 3 ft. Depth of ditches 18 inches

French Drain: Linear feet required _____ Depth of gravel _____

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

[Signature] RS 5/7/04
Signature of Authorized Agent for Harnett County Date