

HTE 05-5-12676

IMPROVEMENT PERMIT

22179

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No Person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) PALM HARBOR HOMES New Installation Septic Tank
 Property Location: SR#1435 TRIPP RD Repairs Nitrification Line

Subdivision LCT Lot # _____

Tax ID # _____ Quadrant # _____

Number of Bedrooms Proposed: 3 ^{360 GPD} Lot Size: 3.33 ACRES

Basement with Plumbing: Garage:

Water Supply: Well Public Community

Distance From Well: _____ ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other Pump to Cons Manette

Size of tank: Septic Tank: 1000 gallons Pump Tank: 1000 gallons


Subsurface Drainage Field No. of ditches 3 exact length of each ditch 120 ft. width of ditches 3 ft. depth of ditches 24-318 in.

French Drain Required: - Linear feet

Date: 8-8-05

This permit is subject to revocation if site plans or intended use change.

Signed: James E. Mankin
 Environmental Health Specialist

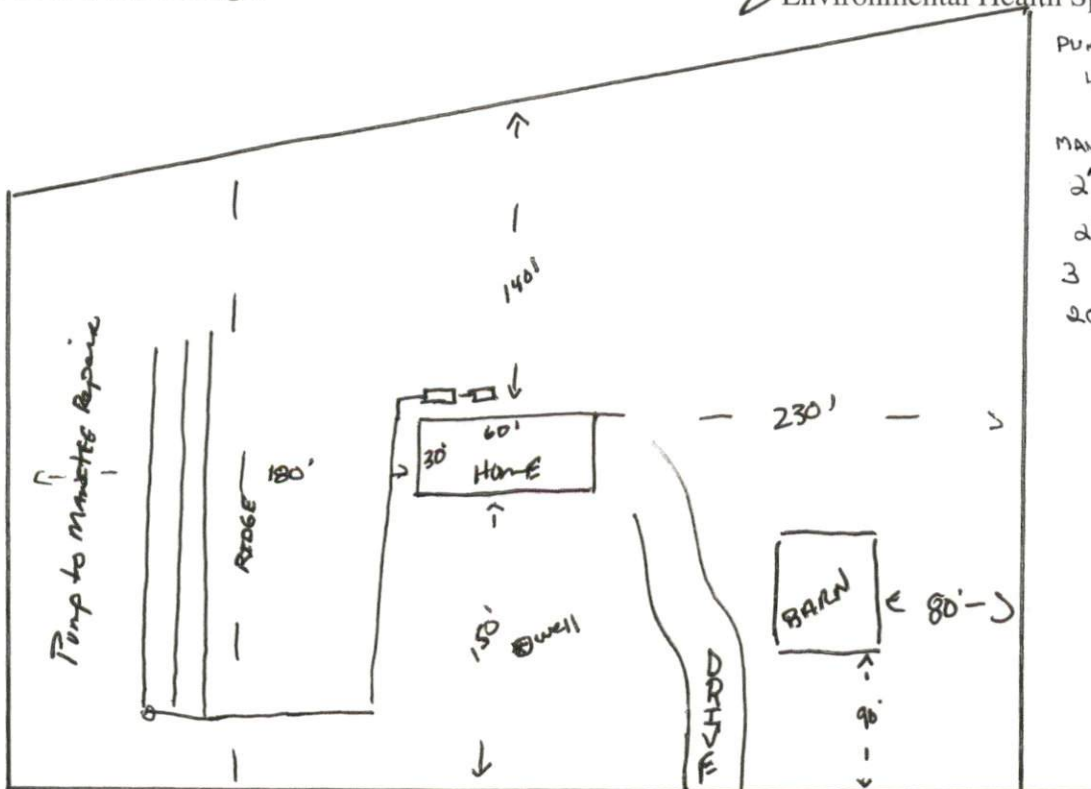

- PUMP SPECS:
- 40 gpm @ 20' TDH
- MANLETTE:
- 2" SCH 40 PIPE
- 2' PRESSURE HEAD
- 3 3/4" SCH 40 VALVES
- 200' SUPPLY LINE

SR 1435 TRIPP RD

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH
AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 22179. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. *This authorization will be invalid if ownership, site plans, or intended use change.*

Name Palm Harbor Homes Telephone # 919-669-8410

Address 5429 Fayetteville Rd Raleigh N.C. 27603

Property Location SR# 1435 Road Name Trepp Rd

Subdivision LARRY CRAIG TAYLOR Lot # _____ # Bedrooms Proposed 3 ³⁶⁰ _{GPD} Lot Size 3.33 AC

TYPE OF SYSTEM

- New Installation Repair Septic Tank Nitrification Lines
- Conventional Other Pump to Conventional "MANHOLE"
- Basement With Plumbing Without Plumbing

Water Supply: Well Public Water Supply Minimum Well Setback: _____ Ft.

Septic Tank 1000 gal Pump Chamber 1000 gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 2 # of lines per field 3 Length of lines 120 Ft.

Width of ditches 3 ft. Depth of ditches 24-18" inches

French Drain: Linear feet required - Depth of gravel -

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

James E. Mansfield ^{III} _{USA}
Signature of Authorized Agent for Harnett County

8-8-05
Date