

HTE# 07-500-18486R

Harnett County Department of Public Health

23564

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Jeff & Anne Swire
PROPERTY LOCATION: Hicks Rd
SUBDIVISION: Hicks Rd LOT # 1
Type of Structure: MOD 60x50-3BR
Proposed Wastewater System Type: ultra shallow gravel
Projected Daily Flow: 360 GPD
Number of bedrooms: 3 Number of Occupants: 6 max
Basement: No
Pump Required: No
Type of Water Supply: Public
Permit conditions: met onsite for final layout - maintain all set backs

Authorized State Agent: Jon W... Date: 11-26-07 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Jeff & Anne Swire
PROPERTY LOCATION: Hicks Rd
SUBDIVISION: Hicks Rd LOT # 1
Facility Type: MOD-60x50 3BR New
Basement? No
Type of Wastewater System: ultra shallow gravel (Initial)
Wastewater Flow: 360 GPD
(See note below, if applicable) ultra-shallow gravel (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons
Pump Tank Size
Exact length of each trench 6x100 feet
Trench Spacing: 9 Feet on Center
Soil Cover: 6 inches
Maximum Trench Depth of: 12 max inches
Pump Requirements: ft. TDH vs. GPM
Aggregate Depth: 6 inches below pipe, 2 inches above pipe, 12 inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: Date:

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: Jon W... Date: 11-26-07 SEE ATTACHED SITE SKETCH
Construction Authorization Expiration Date: 11-26-2012


HTE# 07-500-18486R

Permit # 23564

Harnett County Department of Public Health Site Sketch

ISSUED TO: Jeff & Anne Swire PROPERTY LOCATOR: Hicks Rd SUBDIVISION: Hicks Rd LOT # 1
 Authorized State Agent: Jon W... Date: 11/27/07 31.59 ac
Stc 2

← To SA 1265 Hicks Rd

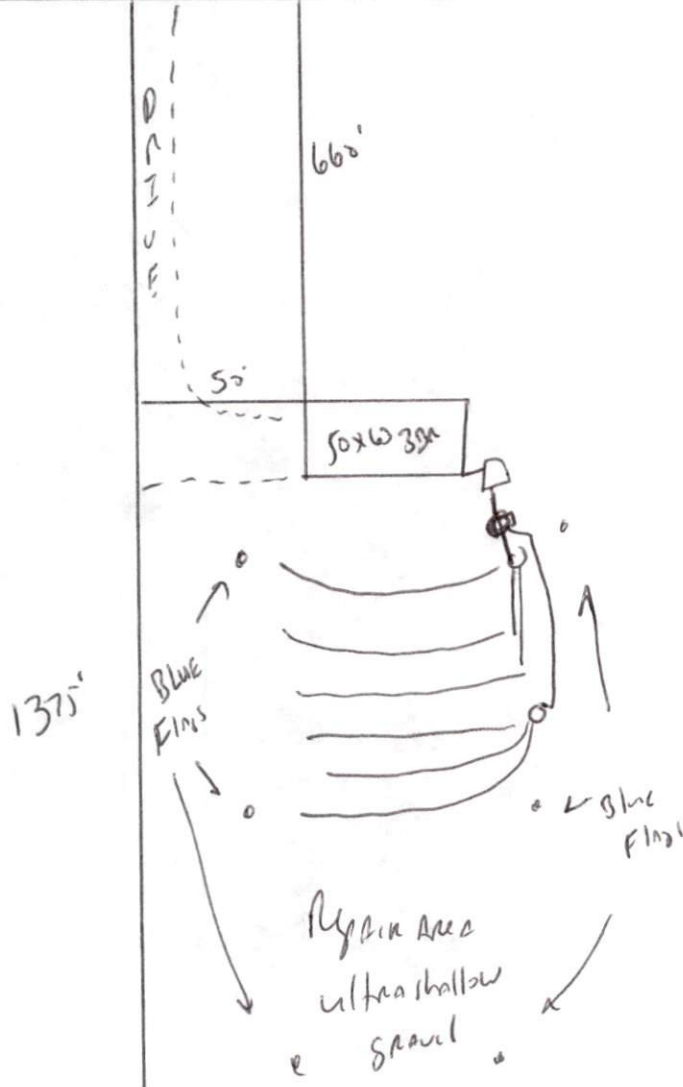

Stub out Plumbing shallow
 At ground level or higher
 Install 6x100 of gravel at
 12" max Ditch Depth
 MUST BEING IN 8 to 12" of approved
 cover.
 Use 3"D" Boxes as shown.
 Maintain all Set Backs
 meet onsite for final
 layout - keep drainfield
 in Area marked by my
 Blue Flags.