



Plan Review, Inspection and Permit Fees

Application Number **08-50021402**

\$100.00	<input type="checkbox"/>	Explosive Materials (90 Days)
\$ 35.00	<input type="checkbox"/>	Explosive Materials (48 Hrs)
\$ 25.00	<input type="checkbox"/>	Fireworks Public Display
\$ 20.00	<input type="checkbox"/>	Final Inspection
\$ 25.00	<input type="checkbox"/>	Fire Alarm Testing
\$ 25.00	<input checked="" type="checkbox"/>	Fixed Fire Suppression
\$ 10.00	<input type="checkbox"/>	Insecticide Fog/Fumigation
\$ 50.00	<input type="checkbox"/>	Testing of Pipes/UST/AGST
\$ 50.00	<input type="checkbox"/>	Plans up to 5000 ft ²
\$100.00	<input type="checkbox"/>	Plans 5001 ft ² to 10,000 ft ²
\$150.00	<input type="checkbox"/>	Plans 10,001 ft ² to 25,000 ft ²
\$250.00	<input type="checkbox"/>	Plans 25,001 ft ² and over
\$ 25.00	<input type="checkbox"/>	Sprinkler Certification Test
\$ 25.00	<input type="checkbox"/>	Standpipe Testing
\$ 25.00	<input type="checkbox"/>	Special Assembly
\$ 10.00	<input type="checkbox"/>	Temporary Kiosks/Displays
\$ 10.00	<input type="checkbox"/>	Tents greater than 700 ft ²
\$ 50.00	<input type="checkbox"/>	Tank Installation (charge for each tank)
\$ 50.00	<input type="checkbox"/>	Tank Removal (charge for each tank)

\$ 25.00 Total

Michael L. Martin *MLM*
 Code Enforcement Official

2/6/09
 Date

Fire Marshal/Emergency Management

Mailing: P. O. Box 370 Lillington, NC 27546
Physical: 200 North 13th Street, Suite 19
Erwin, NC 28339

910-893-7580
910-893-5025

APPLICATION FOR PLAN REVIEW

APPLICATION NUMBER: 08-~~50021402~~ 50021402

TODAY'S DATE: 1-29-09 RECEIVED BY: [Signature]

SUBMITTED BY: Eddie Parrish -

NAME OF PROJECT: Simon's

PHYSICAL ADDRESS: 27 S. Broad St Angier, NC

PHONE NUMBER: 919-639-2277 EXT.: _____

CONTACT PERSON: Gene Joslyn

MAILING ADDRESS: Same

PHONE NUMBER: 919-639-2277

CONTRACTOR'S NAME: Parrish Fire and Safety, Inc

MAILING ADDRESS: PO Box 68 - 104 S. Railroad St Benson, NC 27504


PHONE NUMBER: 919-894-8495

SCANNED
1/29/09
DATE

NOTICE

PLANS THAT ARE SUBMITTED WILL BE REVIEWED AS QUICKLY AS POSSIBLE, WITH AN AVERAGE TIME OF REVIEW BETWEEN 7 - 10 WORKING DAYS.

Angier Land use/zoning permit - #08200 - issued 12-30-08



February 6, 2009

Eddie Parrish
Parrish Fire and Safety, Inc.
PO Box 68
104 S. Railroad Street
Benson, NC 27504

Simon'z
27 South Broad Street
Angier, NC 27501

Application Number 09-50021402

Mr. Parrish,

Thank you for submitting the plans for the hood system. The plans have been carefully reviewed by a qualified code enforcement official to examine for full compliance with the North Carolina Fire Prevention Code and all other fire protection regulatory documents. There are some items that were found during the plan review process that need to be addressed before a final inspection of the new facility can be given. These items are outlined and described below.

- **Commercial cooking equipment.**
 - Portable fire extinguishers shall be provided within a 30-foot (9144 mm) travel distance of commercial-type cooking equipment. Cooking equipment involving vegetable or animal oils and fats shall be protected by a Class K rated portable extinguisher.

- **Performance test**
 - A performance test shall be conducted upon completion and before final approval of the installation of a ventilation system serving commercial food heat-processing appliances. The test shall verify the rate of airflow and proper operation as specified in this chapter. The permit holder shall furnish the necessary test equipment and devices required to perform the tests.

- **Manual system operation.**
 - A manual actuation device shall be located at or near a means of egress from the cooking area, a minimum of 10 feet (3048 mm) and a maximum of 20 feet (6096 mm) from the kitchen exhaust system. The manual actuation device shall be located a minimum of 4.5 feet (1372 mm) and a maximum of 5 feet (1524 mm) above the floor. The manual actuation shall require a maximum force of 40 pounds (178 N) and a maximum movement of 14 inches (356 mm) to actuate the fire suppression system.


- **System interconnection.**
 - The actuation of the fire suppression system shall automatically shut down the fuel or electrical power supply to the cooking equipment. The fuel and electrical supply reset shall be manual.
 - Both hoods shall be interconnected in such a manner that actuation of one system with activate other system.

- **Monitoring**
 - If the building is equipped with a automatic fire alarm system, the fixed fire suppression shall be tied into the system for monitoring of activations

Thank you again for submitting the plans for the hood system. Please review the plans and adhere to any notes and alterations that were made in addition to the original drawings. These remarks are for the plans that were submitted and its original intent. These remarks do not apply if the original intent changes or what was submitted on the above date changes. If you have any questions, please do not hesitate to call this office.

Again, thank you and we look forward to working with you during the construction period!

Sincerely,



Michael L. Martin
Deputy Fire Marshal

Harnett County

Office of the Fire Marshal
P.O. Box 370
Lillington, N.C. 27546
(910)-893-7580

Permit Certificate

Business Name: SIMON'Z
Address: 27 S BROAD ST E
ANGIER, NC 27501

Phone:


The following permit has been issued:


Permit No. 2009008

Type: 047 Fixed Fire Suppression

Issued Date: 02/06/2009
Effective Date: 02/06/2009
Expiration Date: 08/06/2009

This permit certificate has been issued for [] construction / [] operational purposes located at the above business location. This permit has been issued and will be enforced in accordance with section 105 of the N.C. State Fire Prevention Code. Please contact our office for any further questions regarding this permit.


Inspector: Michael (30) L Martin Date: 2/6/09

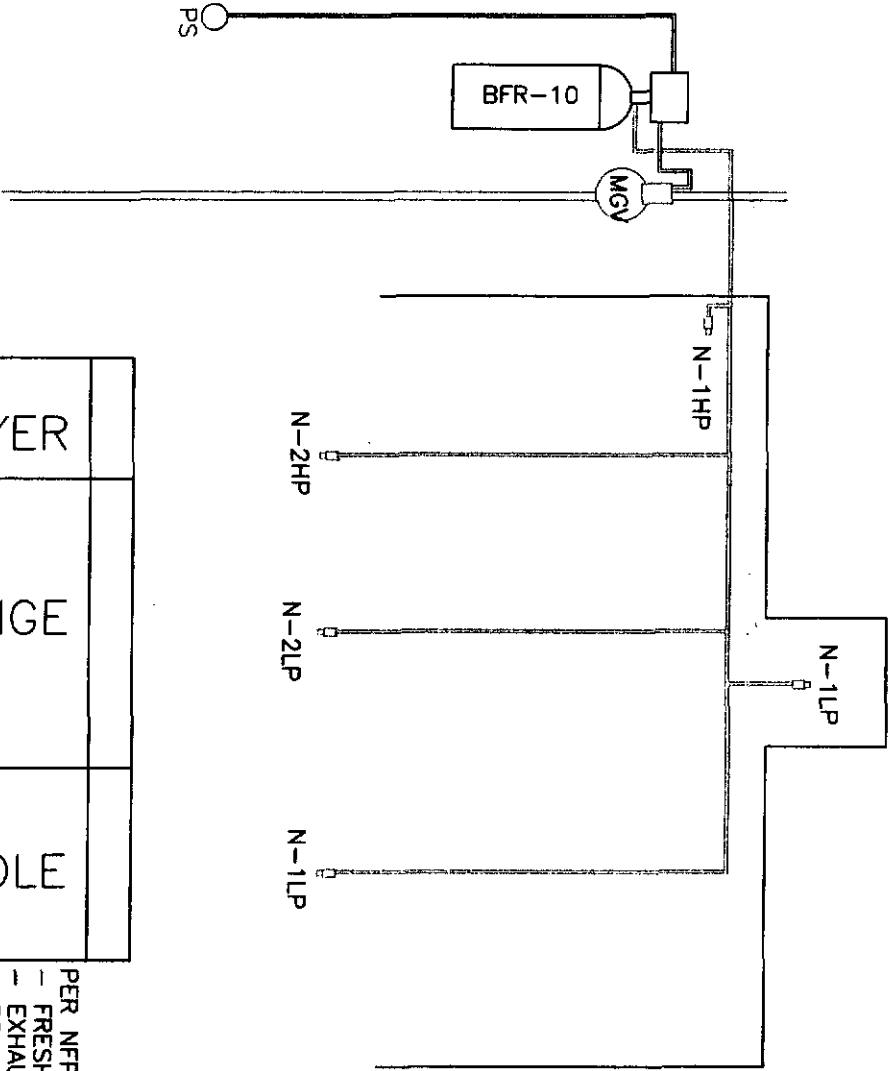

15" FRYER		
36" RANGE		
24" GRIDDLE		

- PER NFPA17A:
- FRESH AIR FAN TURNS OFF
 - EXHAUST CONT. TO RUN
 - PS MOUNTED 10' TO 20' FROM EXHAUST
 - ALL ELEC. DEVICES WILL BE INTERCONNECTED WITH SYSTEM
 - ALL REQUIRED PORTABLE EXTINGUISHERS WILL BE INSTALLED

PROJECT NAME: SIMON'Z RESTAURANT 27 S. BROAD ST. ANGIER, NC
SCALE: 1/2"=1'
UL 300 NFPA17A
BFR-10 7 OF 10 POINTS USED
LEGEND PS - PULL STATION MGV - MECH. GAS VALVE 3/8" SUPPLY FUSIBLE LINK DETECTION
INSTALLED BY: PARRISH FIRE AND SAFETY BENSON, NC (919)894-8495 EDDIE PARRISH

RESPECTFULLY,
THANK YOU FOR YOUR BUSINESS.

[Signature]
2-6-09