

powered by

**Q.ANTUM DUO Z**

PRELIMINARY

# Q.PEAK DUO XL-G11.2

## 570-590

ENDURING HIGH  
PERFORMANCE



#### BREAKING THE 21% EFFICIENCY BARRIER

Q.ANTUM DUO Z Technology with zero gap cell layout boosts module efficiency up to 21.7%.



#### LOW ELECTRICITY GENERATION COSTS

Higher yield per surface area, lower BOS costs and up to 175 watts more module power than standard 144 half-cell modules.



#### ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID Technology, Anti PID Technology<sup>1</sup>, Hot-Spot Protect and Traceable Quality Tra.Q™.



#### EXTREME WEATHER RATING

High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (2400 Pa).



#### A RELIABLE INVESTMENT

Inclusive 12-year product warranty and 25-year linear performance warranty<sup>2</sup>.



#### STATE OF THE ART MODULE TECHNOLOGY

Q.ANTUM DUO combines cutting edge cell separation and innovative 12-busbar design with Q.ANTUM Technology.

<sup>1</sup> APT test conditions according to IEC/TS 62804-1:2015, method B (-1500V, 168h)

<sup>2</sup> See data sheet on rear for further information.

#### THE IDEAL SOLUTION FOR:




Ground-mounted  
solar power plants

Engineered in Germany

**Q CELLS**

## MECHANICAL SPECIFICATION

Format	2416 mm × 1134 mm × 35 mm (including frame)
Weight	31.3 kg
Front Cover	3.2 mm thermally pre-stressed glass with anti-reflection technology
Back Cover	Composite film
Frame	Anodised aluminium
Cell	6 × 26 monocrystalline Q.ANTUM solar half cells
Junction box	53-101 mm × 32-60 mm × 15-18 mm Protection class IP67, with bypass diodes
Cable	4 mm <sup>2</sup> Solar cable; (+) ≥ 750 mm, (-) ≥ 350 mm
Connector	Stäubli MC4-Evo2, Hanwha Q CELLS HQC4; IP68

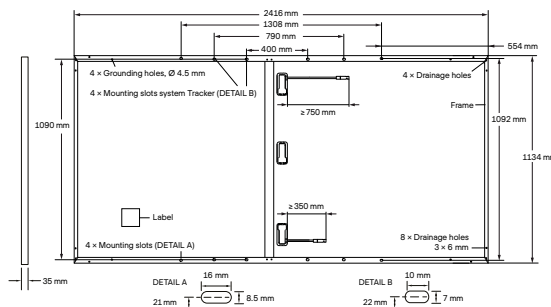


Drawing not to scale

## ELECTRICAL CHARACTERISTICS

POWER CLASS			570	575	580	585	590
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC <sup>1</sup> (POWER TOLERANCE +5 W / -0 W)							
Minimum	Power at MPP <sup>1</sup>	$P_{MPP}$ [W]	570	575	580	585	590
	Short Circuit Current <sup>1</sup>	$I_{SC}$ [A]	13.49	13.51	13.54	13.57	13.59
	Open Circuit Voltage <sup>1</sup>	$V_{OC}$ [V]	53.59	53.62	53.64	53.67	53.70
	Current at MPP	$I_{MPP}$ [A]	12.82	12.87	12.92	12.97	13.01
	Voltage at MPP	$V_{MPP}$ [V]	44.46	44.68	44.90	45.12	45.33
	Efficiency <sup>1</sup>	$\eta$ [%]	≥ 20.8	≥ 21.0	≥ 21.2	≥ 21.4	≥ 21.5
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT <sup>2</sup>							
Minimum	Power at MPP	$P_{MPP}$ [W]	427.6	431.4	435.1	438.9	442.6
	Short Circuit Current	$I_{SC}$ [A]	10.87	10.89	10.91	10.93	10.95
	Open Circuit Voltage	$V_{OC}$ [V]	50.54	50.56	50.59	50.62	50.64
	Current at MPP	$I_{MPP}$ [A]	10.09	10.13	10.17	10.22	10.26
	Voltage at MPP	$V_{MPP}$ [V]	42.39	42.58	42.77	42.96	43.14

<sup>1</sup>Measurement tolerances  $P_{MPP} \pm 3\%$ ;  $I_{SC}$ ;  $V_{OC} \pm 5\%$  at STC: 1000 W/m<sup>2</sup>, 25 ± 2°C, AM 1.5 according to IEC 60904-3 • 2800 W/m<sup>2</sup>, NMOT, spectrum AM 1.5

### Q CELLS PERFORMANCE WARRANTY

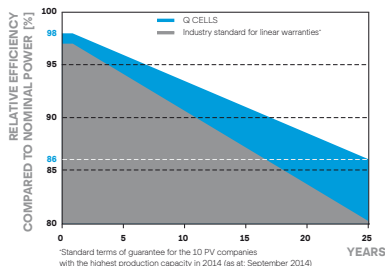


At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

<sup>1</sup>Standard terms of guarantee for the 10 PV companies with the highest production capacity in 2014 (as at September 2014)

### PERFORMANCE AT LOW IRRADIANCE

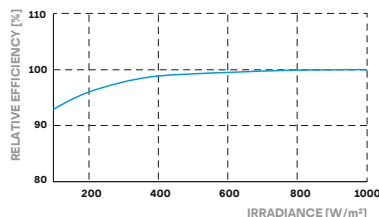

Typical module performance under low irradiance conditions in comparison to STC conditions (25°C, 1000 W/m<sup>2</sup>).

### TEMPERATURE COEFFICIENTS

Temperature Coefficient of $I_{SC}$	$\alpha$ [%/K]	+0.04	Temperature Coefficient of $V_{OC}$	$\beta$ [%/K]	-0.27
Temperature Coefficient of $P_{MPP}$	$\gamma$ [%/K]	-0.34	Nominal Module Operating Temperature	NMOT [°C]	43 ± 3

## PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage	$V_{SYS}$ [V]	1500	PV module classification	Class II
Maximum Reverse Current	$I_R$ [A]	20	Fire Rating based on ANSI / UL 61730	C / TYPE 1
Max. Design Load, Push / Pull	[Pa]	3600 / 1600	Permitted Module Temperature on Continuous Duty	-40°C - +85°C
Max. Test Load, Push / Pull	[Pa]	5400 / 2400		

## QUALIFICATIONS AND CERTIFICATES

IEC 61215:2016;  
IEC 61730:2016.  
This data sheet complies  
with DIN EN 50380.



www.tuv.com  
ID 1111220277

**Note:** Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

### Hanwha Q CELLS GmbH

Sonnenallee 17-21, 06766 Bitterfeld-Wolfen, Germany | TEL +49 (0)3494 66 99-23444 | FAX +49 (0)3494 66 99-23000 | EMAIL sales@q-cells.com | WEB www.q-cells.com



TESLA

## POWERWALL+

---

Powerwall+ is an integrated solar battery system that stores energy from solar production. Powerwall+ has two separate inverters, one for battery and one for solar, that are optimized to work together. Its integrated design and streamlined installation allow for simple connection to any home, and improved surge power capability brings whole home backup in a smaller package. Smart system controls enable owners to customize system behavior to suit their renewable energy needs.

### KEY FEATURES

- Integrated battery, inverter, and system controller for a more compact install
- A suite of application modes, including self-powered, time-based control, and backup modes
- Wi-Fi, Ethernet, and LTE connectivity with easy over-the-air updates

## PHOTOVOLTAIC (PV) AND BATTERY ENERGY STORAGE SYSTEM (BESS) SPECIFICATIONS


<b>Powerwall+ Model Number</b>	1850000-xx-y
<b>Solar Assembly Model Number</b>	1538000-xx-y
<b>Nominal Battery Energy</b>	13.5 kWh
<b>Nominal Grid Voltage (Input / Output)</b>	120/240 VAC
<b>Grid Voltage Range</b>	211.2 - 264 VAC
<b>Frequency</b>	60 Hz
<b>Phase</b>	240 VAC: 2W+N+GND
<b>Maximum Continuous Power On-Grid</b>	7.6 kVA full sun / 5.8 kVA no sun <sup>1</sup>
<b>Maximum Continuous Power Off-Grid</b>	9.6 kW full sun / 7 kW no sun <sup>1</sup>
<b>Peak Off-Grid Power (10 s)</b>	22 kW full sun / 10 kW no sun <sup>1</sup>
<b>Maximum Continuous Current On-Grid</b>	32 A output
<b>Maximum Continuous Current Off-Grid</b>	40 A output
<b>Load Start Capability</b>	98 - 118 A LRA <sup>2</sup>
<b>PV Maximum Input Voltage</b>	600 VDC
<b>PV DC Input Voltage Range</b>	60 - 550 VDC
<b>PV DC MPPT Voltage Range</b>	60 - 480 VDC
<b>MPPTs</b>	4
<b>Input Connectors per MPPT</b>	1-2-1-2
<b>Maximum Current per MPPT (<math>I_{mp}</math>)</b>	13 A <sup>3</sup>
<b>Maximum Short Circuit Current per MPPT (<math>I_{sc}</math>)</b>	17 A <sup>3</sup>
<b>Allowable DC/AC Ratio</b>	1.7
<b>Overcurrent Protection Device</b>	50 A breaker
<b>Maximum Supply Fault Current</b>	10 kA
<b>Output Power Factor Rating</b>	+/- 0.9 to 1 <sup>4</sup>
<b>Round Trip Efficiency</b>	90% <sup>5</sup>
<b>Solar Generation CEC Efficiency</b>	97.5% at 208 V 98.0% at 240 V
<b>Customer Interface</b>	Tesla Mobile App
<b>Internet Connectivity</b>	Wi-Fi, Ethernet, Cellular LTE/4G <sup>6</sup>
<b>PV AC Metering</b>	Revenue grade (+/-0.5%)
<b>Protections</b>	Integrated arc fault circuit interrupter (AFCI), PV Rapid Shutdown
<b>Warranty</b>	10 years

## COMPLIANCE INFORMATION

<b>PV Certifications</b>	UL 1699B, UL 1741, UL 3741, UL 1741 SA, UL 1998 (US), IEEE 1547, IEEE 1547.1
<b>Battery Energy Storage System Certifications</b>	UL 1642, UL 1741, UL 1741 PCS, UL 1741 SA, UL 1973, UL 9540, IEEE 1547, IEEE 1547.1, UN 38.3
<b>Grid Connection</b>	United States
<b>Emissions</b>	FCC Part 15 Class B
<b>Environmental</b>	RoHS Directive 2011/65/EU
<b>Seismic</b>	AC156, IEEE 693-2005 (high)

## MECHANICAL SPECIFICATIONS

<b>Dimensions</b>	1596 x 755 x 160 mm (62.8 x 29.7 x 6.3 in)
<b>Total Weight</b>	140 kg (310 lb) <sup>7</sup>
<b>Battery Assembly</b>	118 kg (261 lb)
<b>Solar Assembly</b>	22 kg (49 lb)
<b>Mounting options</b>	Floor or wall mount

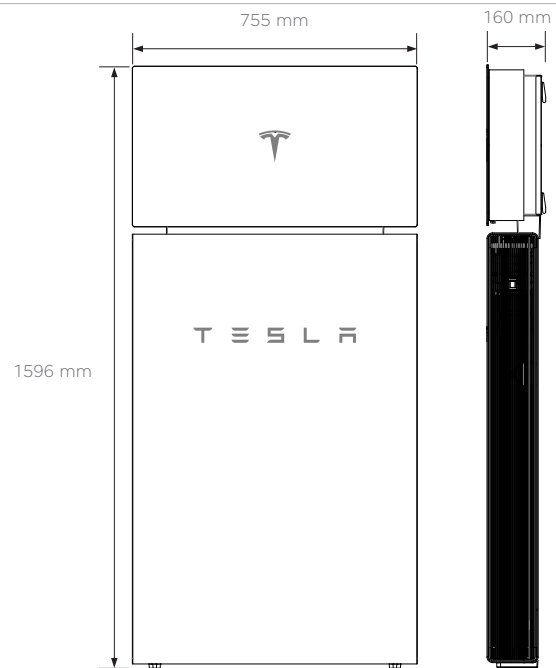

## ENVIRONMENTAL SPECIFICATIONS

<b>Operating Temperature</b>	-20°C to 50°C (-4°F to 122°F) <sup>8</sup>
<b>Recommended Temperature</b>	0°C to 30°C (32°F to 86°F)
<b>Operating Humidity (RH)</b>	Up to 100%, condensing
<b>Storage Conditions</b>	-20°C to 30°C (-4°F to 86°F) Up to 95% RH, non-condensing State of Energy (SoE): 25% initial
<b>Maximum Elevation</b>	3000 m (9843 ft)
<b>Environment</b>	Indoor and outdoor rated
<b>Enclosure Type</b>	Type 3R
<b>Solar Assembly Ingress Rating</b>	IP55 (Wiring Compartment)
<b>Battery Assembly Ingress Rating</b>	IP56 (Wiring Compartment) IP67 (Battery & Power Electronics)
<b>Noise Level @ 1 m</b>	< 40 db(A) optimal, < 50 db(A) maximum

<sup>1</sup>Values provided for 25°C (77°F).

<sup>2</sup>Load start capability may vary.

<sup>3</sup>Where the DC input current exceeds an MPPT rating, jumpers can be used to allow a single MPPT to intake additional DC current up to 26 A  $I_{mp}$  / 34 A  $I_{sc}$ .

<sup>4</sup>Power factor rating at max real power.

<sup>5</sup>AC to battery to AC, at beginning of life.


<sup>6</sup>Cellular connectivity subject to network service coverage and signal strength.

<sup>7</sup>The total weight does not include the Powerwall+ bracket, which weighs an additional 9 kg (20 lb).

<sup>8</sup>Performance may be de-rated at operating temperatures below 10°C (50°F) or greater than 43°C (109°F).

# SOLAR SHUTDOWN DEVICE

The Tesla Solar Shutdown Device is a Mid-Circuit Interrupter (MCI) and is part of the PV system rapid shutdown (RSD) function in accordance with Article 690 of the applicable NEC. When paired with Powerwall+, solar array shutdown is initiated by pushing the System Shutdown Switch if one is present.

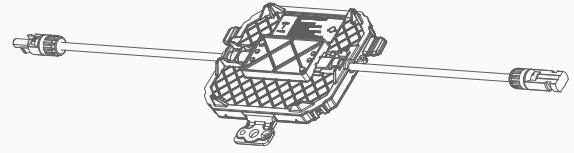

## ELECTRICAL SPECIFICATIONS

<b>Model Number</b>	MCI-1
<b>Nominal Input DC Current Rating (<math>I_{MP}</math>)</b>	12 A
<b>Maximum Input Short Circuit Current (<math>I_{SC}</math>)</b>	15 A
<b>Maximum System Voltage</b>	600 V DC

## RSD MODULE PERFORMANCE

<b>Maximum Number of Devices per String</b>	5
<b>Control</b>	Power Line Excitation
<b>Passive State</b>	Normally open
<b>Maximum Power Consumption</b>	7 W
<b>Warranty</b>	25 years

## COMPLIANCE INFORMATION


<b>Certifications</b>	UL 1741 PVRSE, UL 3741, PVRSA (Photovoltaic Rapid Shutdown Array)
<b>RSD Initiation Method</b>	External System Shutdown Switch
<b>Compatible Equipment</b>	See <i>Compatibility Table</i> below

## ENVIRONMENTAL SPECIFICATIONS

<b>Ambient Temperature</b>	-40°C to 50°C (-40°F to 122°F)
<b>Storage Temperature</b>	-30°C to 60°C (-22°F to 140°F)
<b>Enclosure Rating</b>	NEMA 4 / IP65

## MECHANICAL SPECIFICATIONS

<b>Electrical Connections</b>	MC4 Connector
<b>Housing</b>	Plastic
<b>Dimensions</b>	125 mm x 150 mm x 22 mm (5 in x 6 in x 1 in)
<b>Weight</b>	350 g (0.77 lb)
<b>Mounting Options</b>	ZEP Home Run Clip M4 Screw (#10) M8 Bolt (5/16") Nail / Wood screw

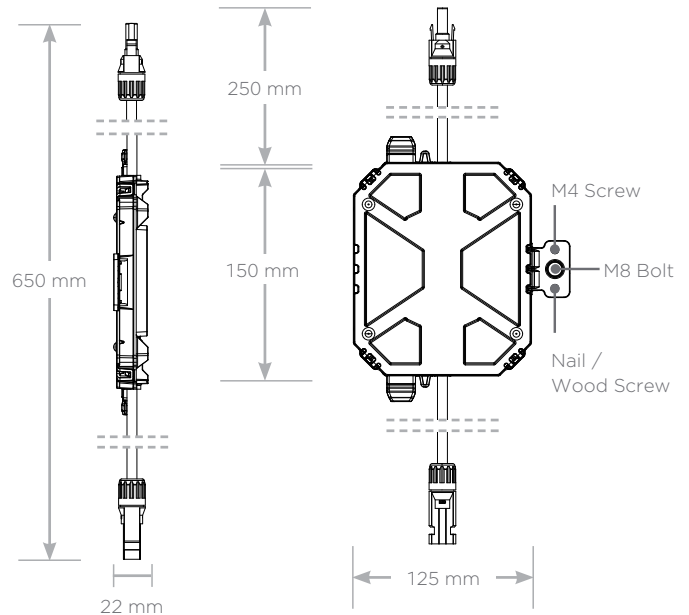

## UL 3741 PV HAZARD CONTROL (AND PVRSA) COMPATIBILITY


Tesla Solar Roof and Tesla/Zep ZS Arrays using the following modules are certified to UL 3741 and UL 1741 PVRSA when installed with the Powerwall+ and Solar Shutdown Devices. See the Powerwall+ Installation Manual for detailed instructions and for guidance on installing Powerwall+ and Solar Shutdown Devices with other modules.

Brand	Model	Required Solar Shutdown Devices
Tesla	Solar Roof V3	1 Solar Shutdown Device per 10 modules
Tesla	Tesla TxxxS (where xxx = 405 to 450 W, increments of 5)	1 Solar Shutdown Device per 3 modules <sup>1</sup>
Tesla	Tesla TxxxH (where xxx = 395 to 415 W, increments of 5)	1 Solar Shutdown Device per 3 modules
Hanwha	Q.PEAK DUO BLK-G5	1 Solar Shutdown Device per 3 modules
Hanwha	Q.PEAK DUO BLK-G6+	1 Solar Shutdown Device per 3 modules


<sup>1</sup>**Exception:** Tesla solar modules installed in locations where the max Voc for three modules at low design temperatures exceeds 165 V shall be limited to two modules between Solar Shutdown Devices.

# SYSTEM LAYOUTS


Powerwall+ with Backup Switch Installed Behind Utility Meter

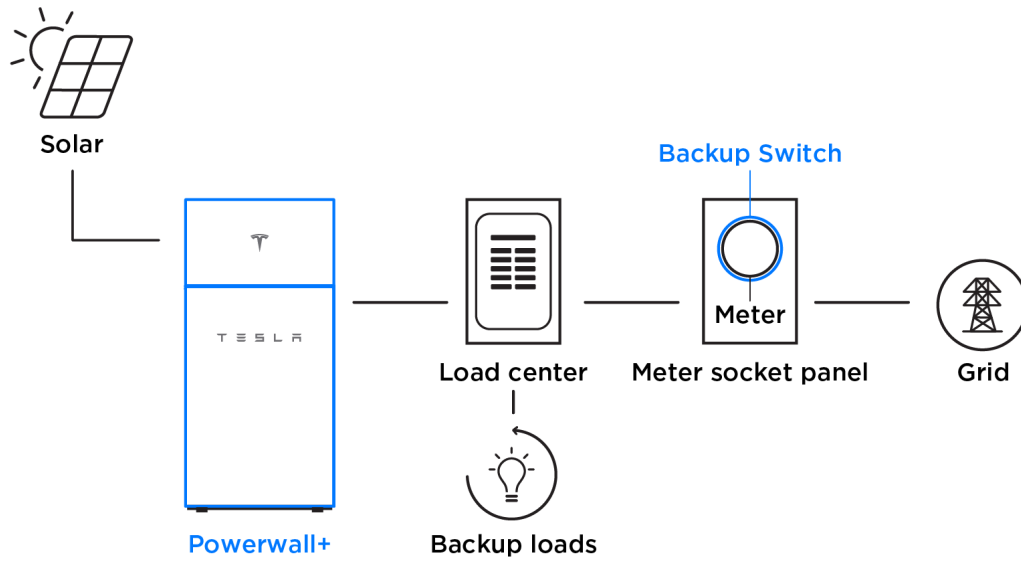


Powerwall+ with Backup Switch Installed Downstream of Utility Meter

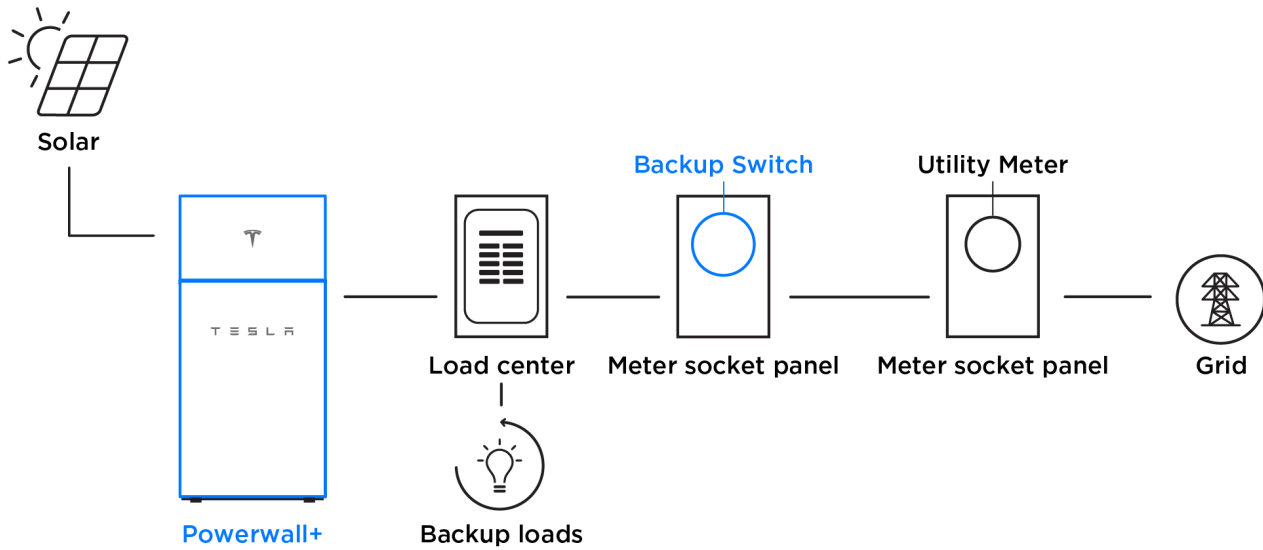

Powerwall+ with Backup Gateway 2 for Whole Home Backup

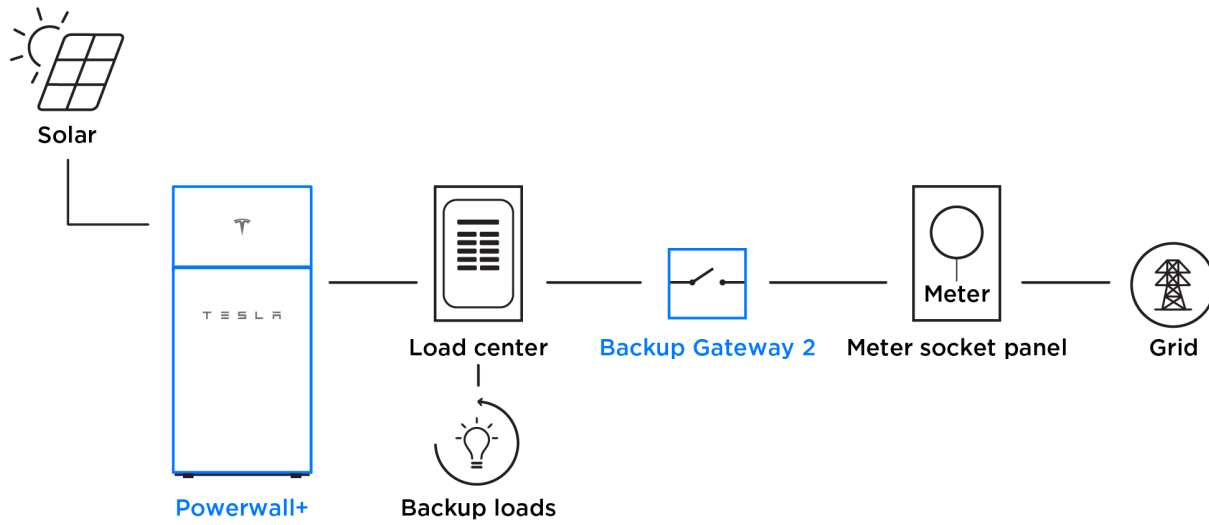

Powerwall+ with Backup Gateway 2 for Partial Home Backup

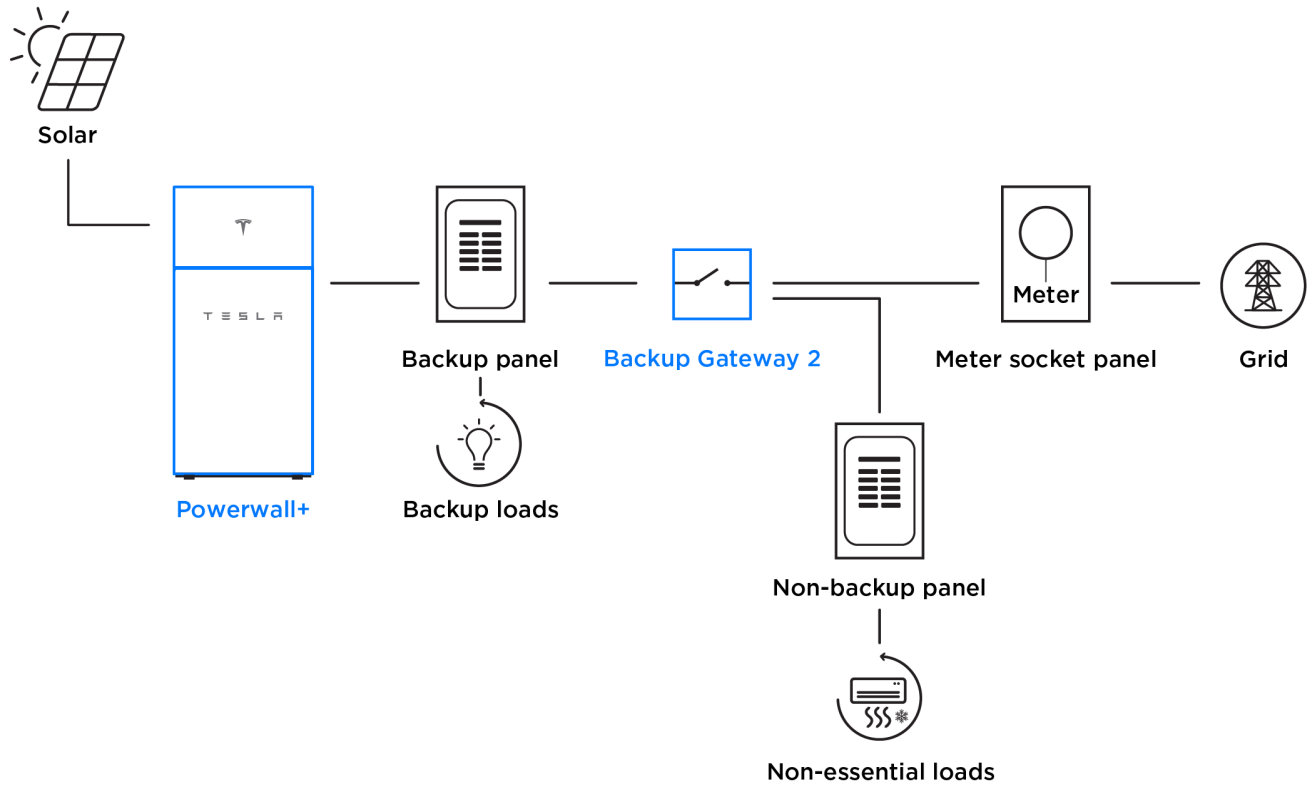

# POWERWALL

## Backup Gateway 2

The Backup Gateway 2 for Tesla Powerwall provides energy management and monitoring for solar self-consumption, time-based control, and backup.

The Backup Gateway 2 controls connection to the grid, automatically detecting outages and providing a seamless transition to backup power. When equipped with a main circuit breaker, the Backup Gateway 2 can be installed at the service entrance. When the optional internal panelboard is installed, the Backup Gateway 2 can also function as a load center.

The Backup Gateway 2 communicates directly with Powerwall, allowing you to monitor energy use and manage backup energy reserves from any mobile device with the Tesla app.



### PERFORMANCE SPECIFICATIONS

<b>AC Voltage (Nominal)</b>	120/240V
<b>Feed-In Type</b>	Split Phase
<b>Grid Frequency</b>	60 Hz
<b>Current Rating</b>	200 A
<b>Maximum Input Short Circuit Current</b>	10 kA <sup>1</sup>
<b>Overcurrent Protection Device</b>	100-200A; Service Entrance Rated <sup>1</sup>
<b>Overvoltage Category</b>	Category IV
<b>AC Meter</b>	Revenue accurate (+/- 0.2 %)
<b>Primary Connectivity</b>	Ethernet, Wi-Fi
<b>Secondary Connectivity</b>	Cellular (3G, LTE/4G) <sup>2</sup>
<b>User Interface</b>	Tesla App
<b>Operating Modes</b>	Support for solar self-consumption, time-based control, and backup
<b>Backup Transition</b>	Automatic disconnect for seamless backup
<b>Modularity</b>	Supports up to 10 AC-coupled Powerwalls
<b>Optional Internal Panelboard</b>	200A 6-space / 12 circuit Eaton BR Circuit Breakers
<b>Warranty</b>	10 years


<sup>1</sup>When protected by Class J fuses, Backup Gateway 2 is suitable for use in circuits capable of delivering not more than 22kA symmetrical amperes.  
<sup>2</sup>The customer is expected to provide internet connectivity for Backup Gateway 2; cellular should not be used as the primary mode of connectivity. Cellular connectivity subject to network operator service coverage and signal strength.

### COMPLIANCE INFORMATION

<b>Certifications</b>	UL 67, UL 869A, UL 916, UL 1741 PCS CSA 22.2 0.19, CSA 22.2 205
<b>Emissions</b>	FCC Part 15, ICES 003

### MECHANICAL SPECIFICATIONS

<b>Dimensions</b>	660 mm x 411 mm x 149 mm (26 in x 16 in x 6 in)
<b>Weight</b>	20.4 kg (45 lb)
<b>Mounting options</b>	Wall mount, Semi-flush mount

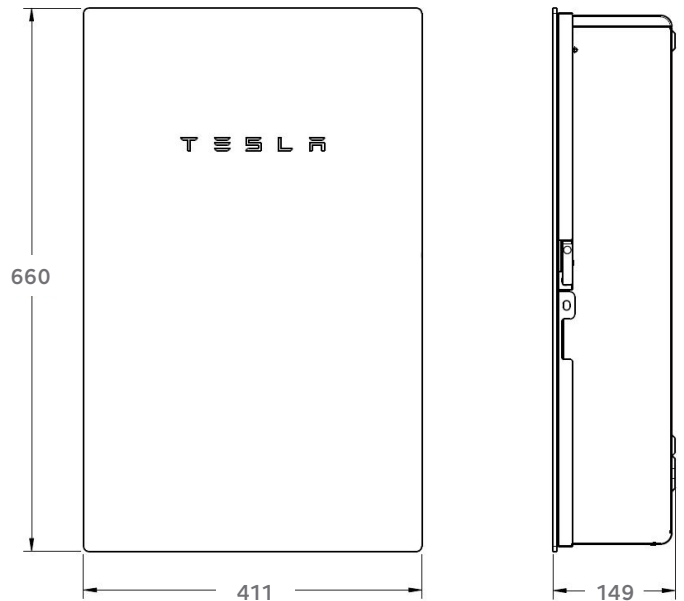

### ENVIRONMENTAL SPECIFICATIONS

<b>Operating Temperature</b>	-20°C to 50°C (-4°F to 122°F)
<b>Operating Humidity (RH)</b>	Up to 100%, condensing
<b>Maximum Elevation</b>	3000 m (9843 ft)
<b>Environment</b>	Indoor and outdoor rated
<b>Enclosure Type</b>	NEMA 3R