

## SCOPE OF WORK

TO INSTALL A SOLAR PHOTOVOLTAIC (PV) SYSTEM AT THE MOSBY RESIDENCE, LOCATED AT 510 ROLLING PINES DR, SPRING LAKE, NORTH CAROLINA. THE POWER GENERATED BY THE PV SYSTEM WILL BE INTERCONNECTED WITH THE UTILITY GRID THROUGH THE EXISTING ELECTRICAL SERVICE EQUIPMENT. THE PV SYSTEM DOES NOT INCLUDE STORAGE BATTERIES.

## SYSTEM RATING

13.175 kW DC STC  
11.904 kW AC

## EQUIPMENT SUMMARY


(31) SUNPOWER SPR-M425-H-AC PV MODULES  
(31) SUNPOWER SPR-M425-H-AC [240V] PV INVERTERS  
(237) (22 X 10.75') LINEAR FEET SUNPOWER INVISIMOUNT

## SHEET INDEX


PV-0 COVER  
PV-1 SITE MAP AND PV LAYOUT  
PV-1A RACKING PLAN  
PV-2 STRING MAP AND MONITORING LAYOUT  
PV-3 ELECTRICAL DIAGRAM  
PV-4 EQ WALL & MOUNTING DETAIL  
PV-5 SYSTEM LABELING DETAIL  
PV-6 SITE DIRECTORY PLACARD  
PV-7 SAFETY PLAN

## GOVERNING CODES

2020 NATIONAL ELECTRICAL CODE WITH STATE AMENDMENTS  
2018 NORTH CAROLINA STATE BUILDING CODE  
UNDERWRITERS LABORATORIES (UL) STANDARDS  
OSHA 29 CFR 1910.269

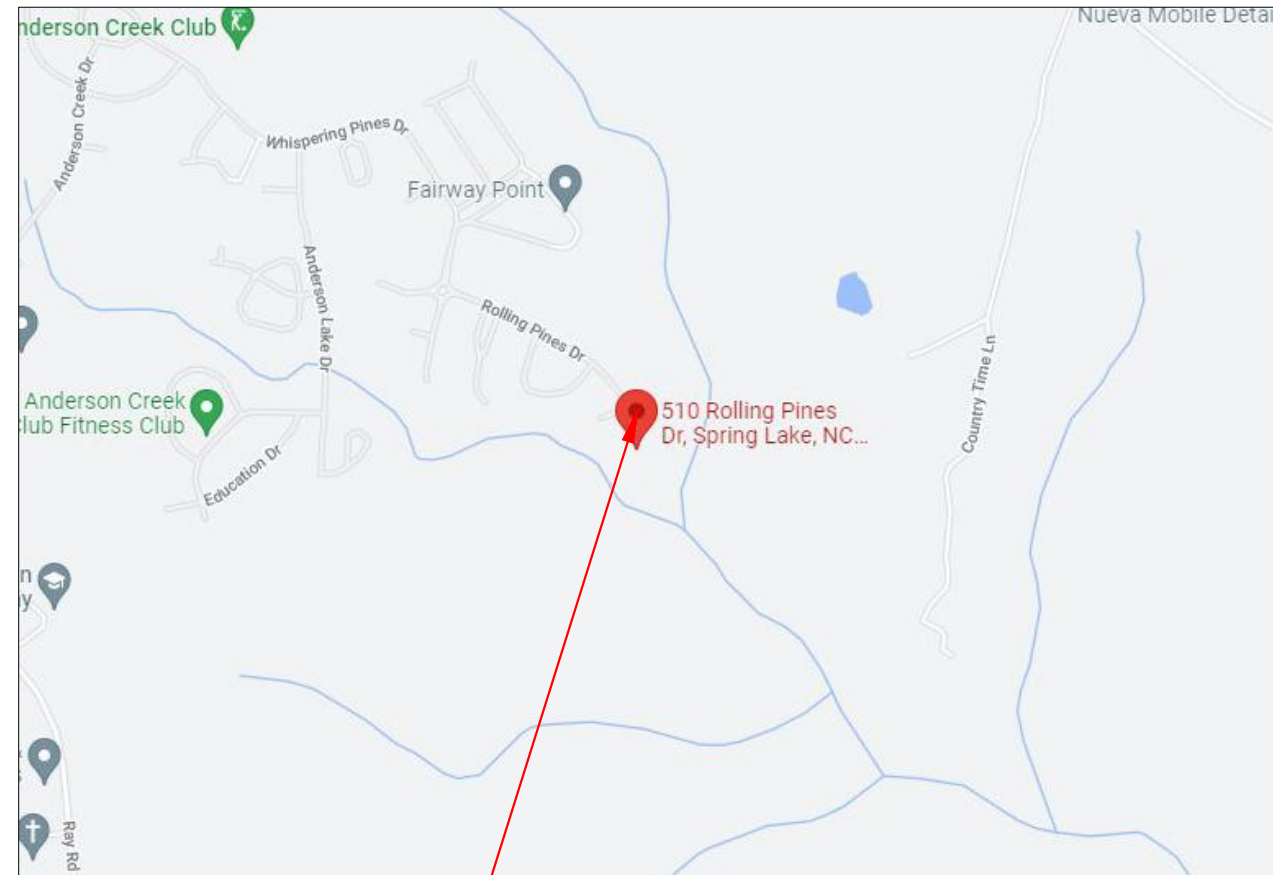

PROJECT LOCATION

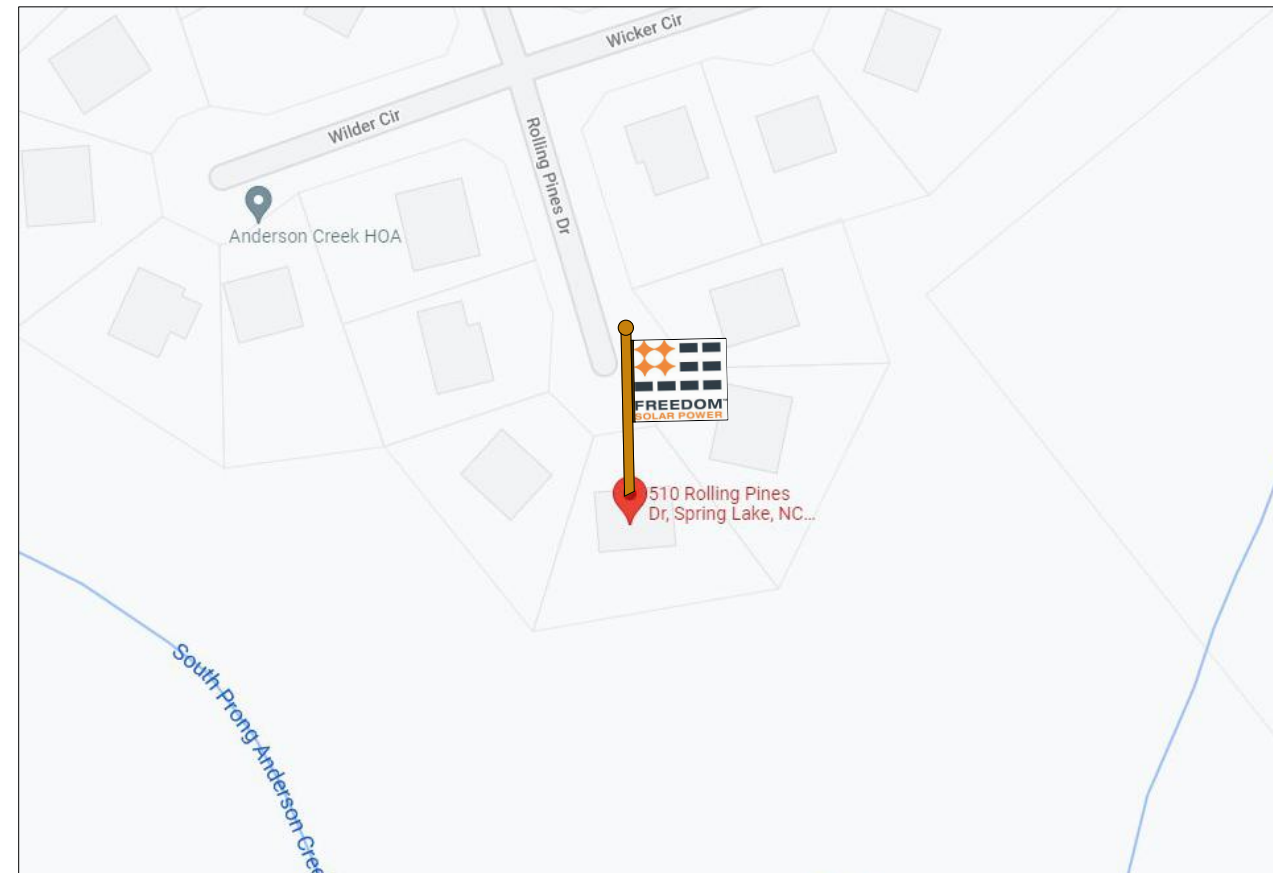

VICINITY MAP

DESIGN BY:  
FREEDOM SOLAR LLC

REVISIONS		
DESCRIPTION	DATE	REV
DESIGN PACKET	01/28/2023	A

CONTRACTOR



**FREEDOM<sup>™</sup>**  
**SOLAR POWER**

FREEDOM SOLAR LLC  
4801 FREIDRICH LN, STE 100  
AUSTIN, TX 78744  
TECL # 28621  
TBPE FIRM # F-17690

PROJECT NAME

MOSBY, DAMON  
510 ROLLING PINES DR  
SPRING LAKE, NORTH CAROLINA,  
28390  
(808) 469-5030

SHEET NAME

COVER

SHEET SIZE

ANSI B  
11" x 17"

SHEET NUMBER

PV-0

LEAD ID: 108985

**CONSTRUCTION SUMMARY**

- (31) (SUNPOWER SPR-M425-H-AC) SOLAR MODULES, 13.175 kW DC STC  
MODULE DIMENSIONS = 40.6" X 73.7" X 1.57"
- (31) SUNPOWER SPR-M425-H-AC [240V] PV INVERTERS  
COMBINED INVERTER OUTPUT = 11.904 kW AC.
- (237) (22 X 10.75') LINEAR FEET SUNPOWER INVISIMOUNT
- (84) QUICKBOLT QB2 ROOF ATTACHMENTS
- (1) SUNPOWER MONITORING

**SITE DETAILS**

ROOF TYPE: ASPHALT SHINGLE  
 ARRAY #1 - TILT = 29°, AZIMUTH = 175°  
 ARRAY #2 - TILT = 34°, AZIMUTH = 265°  
 ARRAY #3 - TILT = 32°, AZIMUTH = 265°  
 ARRAY #4 - TILT = 33°, AZIMUTH = 85°  
 ARRAY #5 - TILT = 33°, AZIMUTH = 265°  
 INSTALLATION DIFFICULTY = 11 => HARD

MAIN DISTRIBUTION PANEL  
 GROUNDING ELECTRODE  
 (INSIDE GARAGE WALL)

SOUTH RIVER EMC  
 REVENUE METER  
 #135 393 182  
 PV AC DISCONNECT  
 -VISIBLE  
 -LOCKABLE  
 -LABELED DISCONNECT  
 SOLAR LOAD CENTER  
 MONITORING  
 (OUTSIDE GARGAE WALL)

WEIGHT OF PV ARRAY < 3 PSF  
 LAYER OF ASPHALT SHINGLES =1  
 ROOFING MATERIAL = ASPHALT SHINGLES  
 WIND SPEED = 118 MPH  
 THEREFORE NC REGISTERED DESIGN  
 PROFESSIONAL SEAL IS NOT REQUIRED

**FALL PROTECTION REQUIRED**

**CONSTRUCTION NOTES**

- 1.) ALL EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- 2.) ALL OUTDOOR EQUIPMENT SHALL BE RAINTIGHT WITH MINIMUM NEMA 3R RATING.
- 3.) ALL LOCATIONS ARE APPROXIMATE AND REQUIRE FIELD VERIFICATION.

PV ARRAY #5  
 (7) MODULES

PV ARRAY #2  
 (7) MODULES

PV ARRAY #1  
 (9) MODULES

PV ARRAY #4  
 (4) MODULES

PV ARRAY #3  
 (4) MODULES

THE HEDGE IN FRONT OF THE EQUIPMENT WALL NEEDS TO BE REMOVED



DESIGN BY:  
 FREEDOM SOLAR LLC

REVISIONS		
DESCRIPTION	DATE	REV
DESIGN PACKET	01/28/2023	A

CONTRACTOR

**FREEDOM™  
SOLAR POWER**

FREEDOM SOLAR LLC  
 4801 FREIDRICH LN, STE 100  
 AUSTIN, TX 78744  
 TECL # 28621  
 TBPE FIRM # F-17690

PROJECT NAME

MOSBY, DAMON  
 510 ROLLING PINES DR  
 SPRING LAKE, NORTH CAROLINA,  
 28390  
 (808) 469-5030

SHEET NAME

SITE MAP &  
 PV LAYOUT

SHEET SIZE

ANSI B  
 11" x 17"

SHEET NUMBER

PV-1



DESIGN BY:  
FREEDOM SOLAR LLC

REVISIONS		
DESCRIPTION	DATE	REV
DESIGN PACKET	01/28/2023	A

CONTRACTOR

**FREEDOM™  
SOLAR POWER**

FREEDOM SOLAR LLC  
4801 FREIDRICH LN, STE 100  
AUSTIN, TX 78744  
TECL # 28621  
TBPE FIRM # F-17690

PROJECT NAME

**MOSBY, DAMON**

**510 ROLLING PINES DR**

**SPRING LAKE, NORTH CAROLINA,**

**28390**

**(808) 469-5030**

SHEET NAME

**RACKING PLAN**

SHEET SIZE

**ANSI B**  
**11" x 17"**


SHEET NUMBER

**PV-1A**

(2) RAILS PER ROW OF MODULES  
EVENLY SPACED

5/16" LAG SCREW  
W/ MIN. 2.5" EMBEDMENT INTO FRAMING  
AT MAX 48" O.C. ALONG RAILS

2"X4" TRUSS AT 24" O.C. TYP.

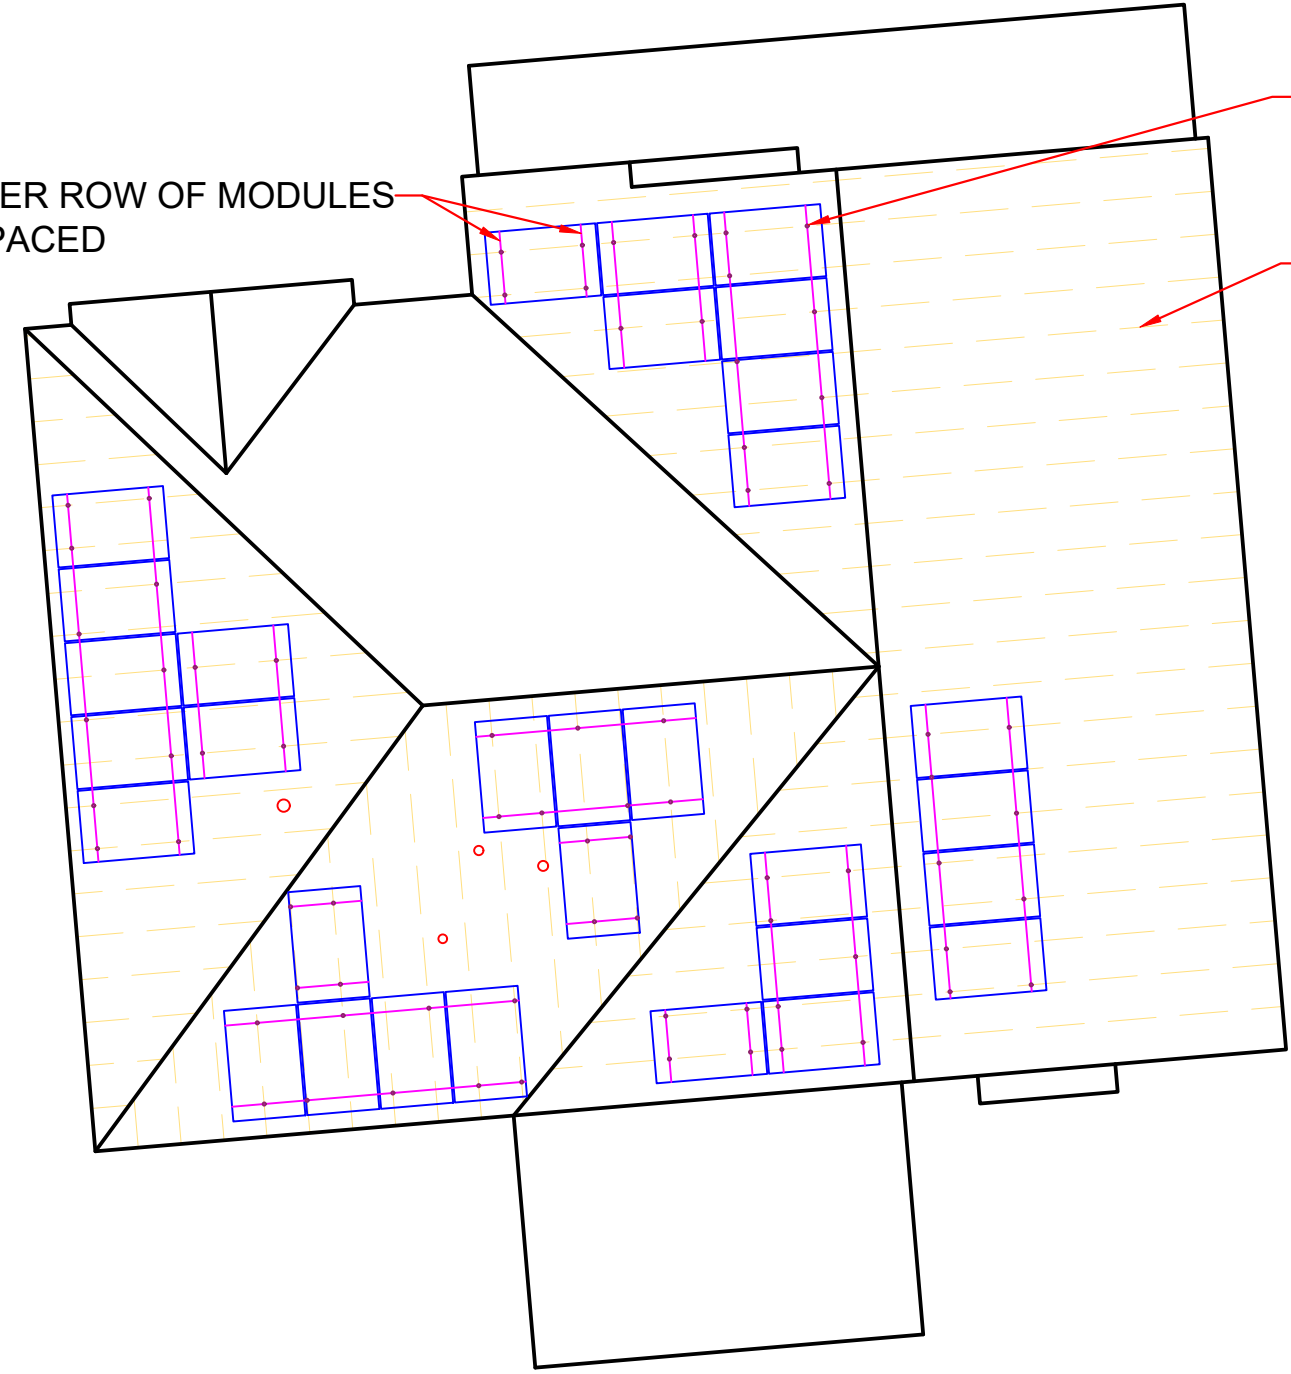

PV ARRAY #1-  
WEIGHT CALCULATION:  
MODULE WEIGHT =48 LBSXMODULE=(9)(48 LBS)=432 LBS  
WEIGHT FOR INVISIMEOUNT RAILS =9 OZ/FT X 0.5625 LBS/FT = (76 FT)(0.56225 LBS/FT)=42.73 LBS  
ROOF ATTACHMENT WEIGHT=2 LBS/ ATTACHEMENT=(24)(2 LBS)=48 LBS  
TOTAL WEIGHT = 432 LBS + 42.731 LBS+ 48 LBS= 522.731 LBS  
ARRAY AREA= 187.15 SF  
DISTRIBUTED WEIGHT = 522.731 / 187.15 SF = 2.79 LBS

PV ARRAY #2-  
WEIGHT CALCULATION:  
MODULE WEIGHT =48 LBSXMODULE=(7)(48 LBS)= 336 LBS  
WEIGHT FOR INVISIMEOUNT RAILS =9 OZ/FT X 0.5625 LBS/FT = (65 FT)(0.56225 LBS/FT)=36.54 LBS  
ROOF ATTACHMENT WEIGHT=2 LBS/ ATTACHEMENT=(15)(2 LBS)=30 LBS  
TOTAL WEIGHT = 336 LBS + 36.54 LBS+ 30 LBS= 402.54 LBS  
ARRAY AREA= 145.56 SF  
DISTRIBUTED WEIGHT = 402.54 / 145.56 SF = 2.76 LBS

PV ARRAY #3-  
WEIGHT CALCULATION:  
MODULE WEIGHT =48 LBSXMODULE=(4)(48 LBS)= 192.0 LBS  
WEIGHT FOR INVISIMEOUNT RAILS =9 OZ/FT X 0.5625 LBS/FT = (43 FT)(0.56225 LBS/FT)=24.17 LBS  
ROOF ATTACHMENT WEIGHT=2 LBS/ ATTACHEMENT=(11)(2 LBS)=22 LBS  
TOTAL WEIGHT = 192.0 LBS + 24.17 LBS+ 22 LBS=238.17 LBS  
ARRAY AREA= 83.17 SF  
DISTRIBUTED WEIGHT = 238.17 / 83.17 SF = 2.86 LBS

PV ARRAY #4-  
WEIGHT CALCULATION:  
MODULE WEIGHT =48 LBSXMODULE=(4)(48 LBS)= 192.0 LBS  
WEIGHT FOR INVISIMEOUNT RAILS =9 OZ/FT X 0.5625 LBS/FT = (43 FT)(0.56225 LBS/FT)=24.17 LBS  
ROOF ATTACHMENT WEIGHT=2 LBS/ ATTACHEMENT=(8)(2 LBS)=16 LBS  
TOTAL WEIGHT = 192.0 LBS + 24.17 LBS+ 16 LBS=232.17 LBS  
ARRAY AREA= 83.17 SF  
DISTRIBUTED WEIGHT = 232.17 / 83.17 SF = 2.79 LBS

PV ARRAY #5-  
WEIGHT CALCULATION:  
MODULE WEIGHT =48 LBSXMODULE=(7)(48 LBS)= 336 LBS  
WEIGHT FOR INVISIMEOUNT RAILS =9 OZ/FT X 0.5625 LBS/FT = (65 FT)(0.56225 LBS/FT)=36.54 LBS  
ROOF ATTACHMENT WEIGHT=2 LBS/ ATTACHEMENT=(17)(2 LBS)=34 LBS  
TOTAL WEIGHT = 336 LBS + 36.54 LBS+ 34 LBS= 406.54 LBS  
ARRAY AREA= 145.56 SF  
DISTRIBUTED WEIGHT = 406.54 / 145.56 SF = 2.79 LBS

ARRAY WEIGHT < 3 PSF, THEREFORE SEALED PLANS NOT REQUIRED .

WEIGHT OF PV ARRAY < 3 PSF  
LAYER OF ASPHALT SHINGLES =1  
ROOFING MATERIAL = ASPHALT SHINGLES  
WIND SPEED = 118 MPH  
THEREFORE NC REGISTERED DESIGN  
PROFESSIONAL SEAL IS NOT REQUIRED

**CONSTRUCTION NOTES**

- 1.) ALL EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- 2.) ALL OUTDOOR EQUIPMENT SHALL BE RAIN TIGHT WITH MINIMUM NEMA 3R RATING.
- 3.) ALL LOCATIONS ARE APPROXIMATE AND REQUIRE FIELD VERIFICATION.

DESIGN BY:  
FREEDOM SOLAR LLC

REVISIONS

DESCRIPTION	DATE	REV
DESIGN PACKET	01/28/2023	A

CONTRACTOR



**FREEDOM™  
SOLAR POWER**

FREEDOM SOLAR LLC  
4801 FREIDRICH LN, STE 100  
AUSTIN, TX 78744  
TECL # 28621  
TBPE FIRM # F-17690

PROJECT NAME


MOSBY, DAMON  
510 ROLLING PINES DR  
SPRING LAKE, NORTH CAROLINA,  
28390  
(808) 469-5030

SHEET NAME  
STRING MAP  
&  
MONITORING  
LAYOUT

SHEET SIZE  
ANSI B  
11" x 17"


SHEET NUMBER  
PV-2

SUNPOWER SUPERVISOR S/N \_\_\_\_\_

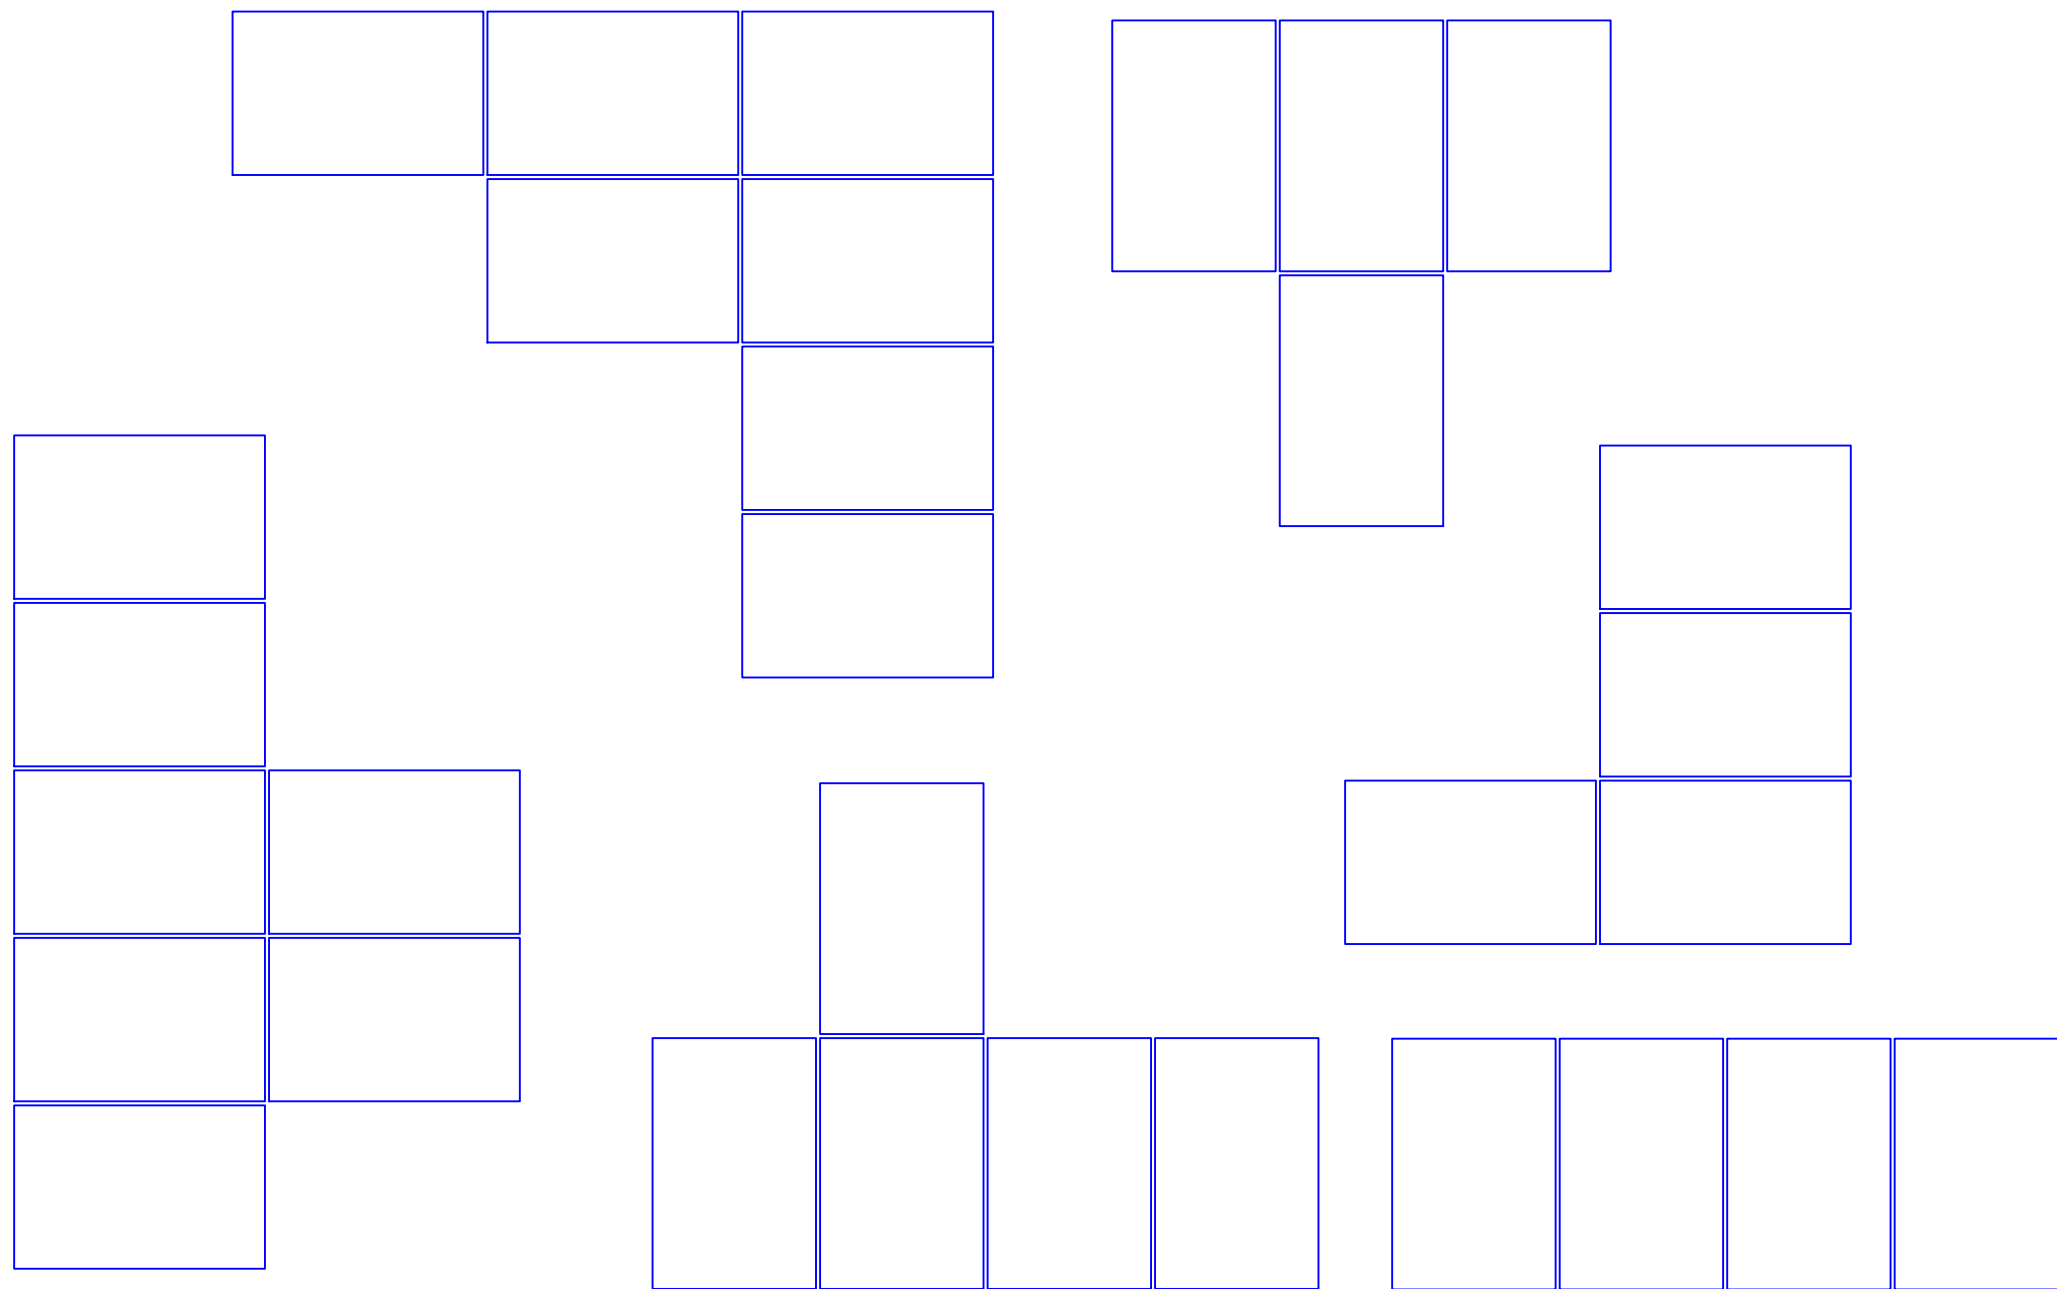

# SOLAR ARRAY - 13.175kW DC STC, 11.904 kW AC (31) SUNPOWER SPR-M425-H-AC PV MODULES MODULES

**NEW JUNCTION BOX:**  
TRANSITION FROM DG CABLE  
TO AWG #10 THWN-2  
NEMA 3R, UL LISTED


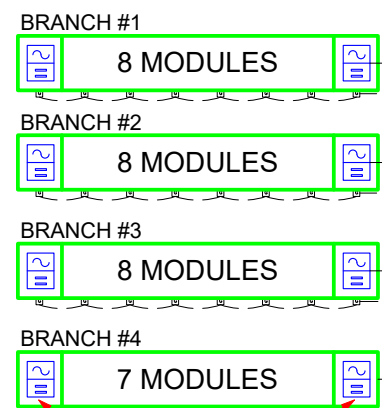


**NEW SOLAR LOAD CENTER**  
240VAC, 125A  
NEMA 3R, UL LISTED  
(5) 2P-20A BREAKERS

**NEW PV AC DISCONNECT**  
240VAC, 100A  
FUSIBLE, (2) 70A FUSES  
NEMA 3R, UL LISTED  
VISIBLE, LOCKABLE, LABELED  
DISCONNECT

SOUTH RIVER EMC  
REVENUE METER  
#135 393 182  
1-PHASE, 240V

POINT OF INTERCONNECTION  
PER NEC 240.21(B)(1) -OR- 705.31  
LENGTH OF TAP CONDUCTORS  
SHALL NOT EXCEED 10 FT FROM  
POINT OF INTERCONNECT TO OCPD

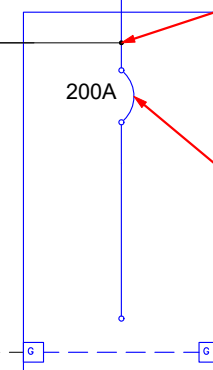

MAIN SERVICE DISCONNECT  
240V, 200A  
MAIN DISTRIBUTION PANEL  
SQD QO IP3W 240V, 200A BUS

EXISTING GROUNDING  
ELECTRODE SYSTEM

(31) SUNPOWER SPR-M425-H-AC[240V] PV INVERTERS  
240VAC, 1.60 MAX  
CEC WEIGHTED EFFICIENCY 97.0%  
NEMA 4R, UL LISTED, INTERNAL  
GFDI

**NEW SUNPOWER  
MONITORING**

10/2 ROMEX WIRE

(3) AWG #6 THWN-2  
(1) AWG #8 THWN-2 GND  
IN 2" CONDUIT

**ELECTRICAL NOTES**

- ALL EQUIPMENT TO BE LISTED BY UL OR OTHER NRTL, AND LABELED FOR ITS APPLICATION.
- ALL CONDUCTORS SHALL BE COPPER, RATED FOR 600 V AND 90°C WET ENVIRONMENT UNLESS OTHERWISE NOTED.
- IN CASE WIRING, CONDUIT, AND RACEWAYS ARE MOUNTED ON ROOFTOPS, THEY SHALL BE ROUTED DIRECTLY TO, AND LOCATED AS CLOSE AS POSSIBLE TO THE NEAREST RIDGE, HIP, OR VALLEY, NO LESS THAN 7/8" ABOVE THE ROOF SURFACE.
- WORKING CLEARANCES AROUND ALL NEW AND EXISTING ELECTRICAL EQUIPMENT SHALL COMPLY WITH NEC 110.26.
- DRAWINGS INDICATE THE GENERAL ARRANGEMENT OF SYSTEMS. CONTRACTOR SHALL FURNISH ALL NECESSARY OUTLETS, SUPPORTS, FITTINGS AND ACCESSORIES TO FULFILL APPLICABLE CODES AND STANDARDS.
- WHERE SIZES OF JUNCTION BOXES, RACEWAYS AND CONDUITS ARE NOT SPECIFIED, THE CONTRACTOR SHALL SIZE THEM ACCORDINGLY. SPECIFIED CONDUIT SIZES ARE MINIMUM REQUIREMENTS AND LARGER DIAMETERS SHALL BE PERMITTED.
- ALL WIRE TERMINATIONS SHALL BE APPROPRIATELY LABELED AND READILY VISIBLE.
- MAXIMUM MOUNTING HEIGHT FROM GRADE TO CENTER OF METER SOCKET SHALL BE 72" FOR RESIDENTIAL SINGLE PHASE METER SOCKETS 0-320 AMPS. MINIMUM MOUNTING HEIGHT IS 30" FROM FOR AUSTIN ENERGY, AND 48" FOR ALL OTHER JURISDICTIONS
- MINIMUM HORIZONTAL CLEARANCE FROM GAS REGULATOR TO ANY ELECTRICAL ENCLOSURE IS 36", EXCEPT AUSTIN ENERGY WHICH REQUIRES 48" CLEARANCE FROM GAS TO METER SOCKET
- PV DISCONNECT SHALL BE VISIBLE, LOCKABLE AND LABELED AND THE DOOR CANNOT BE OPENED WHEN HANDLE IS IN ON POSITION
- BY DEFAULT THE MONITORING DEVICE IS SHOWN CONNECTED TO A 20-AMP BREAKER IN THE SOLAR LOAD CENTER. ALTERNATIVELY, THE MONITORING DEVICE MAY BE CONNECTED TO A 20-AMP BREAKER AT THE MAIN DISTRIBUTION PANEL.
- ALL EQUIPMENT TERMINATIONS SHALL BE RATED FOR 75 DEGREES OR GREATER
- ALL CT WIRES SHALL BE CONSIDERED CLASS 1 PER NEC ARTICLE 725, AND BE MARKED AS RATED FOR 600V. PER 725.48(A) CLASS 1 CIRCUITS SHALL BE PERMITTED TO OCCUPY THE SAME RACEWAY AS OTHER CIRCUITS PROVIDED ALL CONDUCTORS ARE INSULATED FOR THE MAXIMUM VOLTAGE OF ANY CONDUCTOR IN THE RACEWAY.
- AWG #10 COPPER CONDUCTORS ARE SPECIFIED AS THE DEFAULT WIRE REQUIRED FROM THE PV ARRAY TO THE SOLAR LOAD CENTER, HOWEVER, AWG #12 COPPER CONDUCTORS MAY BE UTILIZED IF BOTH OF THE FOLLOWING CONDITIONS ARE MET: THE LENGTH OF THE CONDUCTOR IS LESS THAN 75 FT AND THERE ARE LESS THAN 8 CURRENT-CARRYING CONDUCTORS WITHIN THE RACEWAY.

CALCULATIONS FOR CURRENT CARRYING CONDUCTORS
<b>INVERTER OUTPUT WIRE AMPACITY CALCULATION</b> [NEC 690.8(A)(1)(e)]: 1.60A PER INVERTER ((SUNPOWER SPR-M425-H-AC [240V])) MAXIMUM INVERTER BRANCH CURRENT = (10)(1.60A) = 16A CONTINUOUS USE: #10 WIRE 75°C DERATED AMPACITY = (0.80)(35.0A) = 28.0A 28.0A > 16A CONDITIONS OF USE: #10 WIRE 90°C DERATED AMPACITY = (0.91)(0.80)(30.0A) = 29.1A 29.1A > 16A
<b>SOLAR LOAD CENTER OUTPUT WIRE AMPACITY CALCULATION</b> [NEC 690.8(A)(1)(e)]: 1.60A PER INVERTER ((SUNPOWER SPR-M425-H-AC [240V])) COMBINED CURRENT = (31)(1.60A) = 49.60A CONTINUOUS USE: #6 WIRE 75°C DERATED AMPACITY = (0.80)(65A) = 52.0A 52.0A > 49.60A CONDITIONS OF USE: #6 WIRE 90°C DERATED AMPACITY = (0.91)(75A) = 68.25A 68.25A > 49.60A

CALCULATIONS FOR OVERCURRENT DEVICES
<b>INVERTER BRANCH AC CURRENT CALCULATION</b> [NEC 690.8(A)(1)(e)]: 1.60A PER INVERTER ((SUNPOWER SPR-M425-H-AC [240V])) MAXIMUM BRANCH INVERTER CURRENT = (10)(1.60A) = 16A MINIMUM OCPD = (16A)(1.25) = 20A USE 2P-20A BREAKERS IN SOLAR LOAD CENTER FOR INVERTER BRANCH OCPD
<b>SYSTEM AC CURRENT CALCULATION</b> [NEC 690.8(A)(1)(e)]: 1.60A PER INVERTER ((SUNPOWER SPR-M425-H-AC [240V])) COMBINED CURRENT = (31)(1.60A) = 49.60A MINIMUM OCPD = (49.60A)(1.25) = 62.00A USE (2) 70A FUSES IN PV AC DISCONNECT FOR SYSTEM OCPD NOTE : AWG #6 CONDUCTORS ARE ADEQUATELY PROTECTED BY 70A FUSES

DESIGN BY:  
FREEDOM SOLAR LLC

REVISIONS		
DESCRIPTION	DATE	REV
DESIGN PACKET	01/28/2023	A

CONTRACTOR

**FREEDOM SOLAR POWER**  
FREEDOM SOLAR LLC  
4801 FREDRICH LN, STE 100  
AUSTIN, TX 78744  
TECL # 28621  
TBPE FIRM # F-17690

PROJECT NAME

MOSBY, DAMON  
510 ROLLING PINES DR  
SPRING LAKE, NORTH CAROLINA,  
28390  
(808) 469-5030

SHEET NAME


**ELECTRICAL  
DIAGRAM**

SHEET SIZE

**ANSI B  
11" x 17"**



SHEET NUMBER

**PV-3**

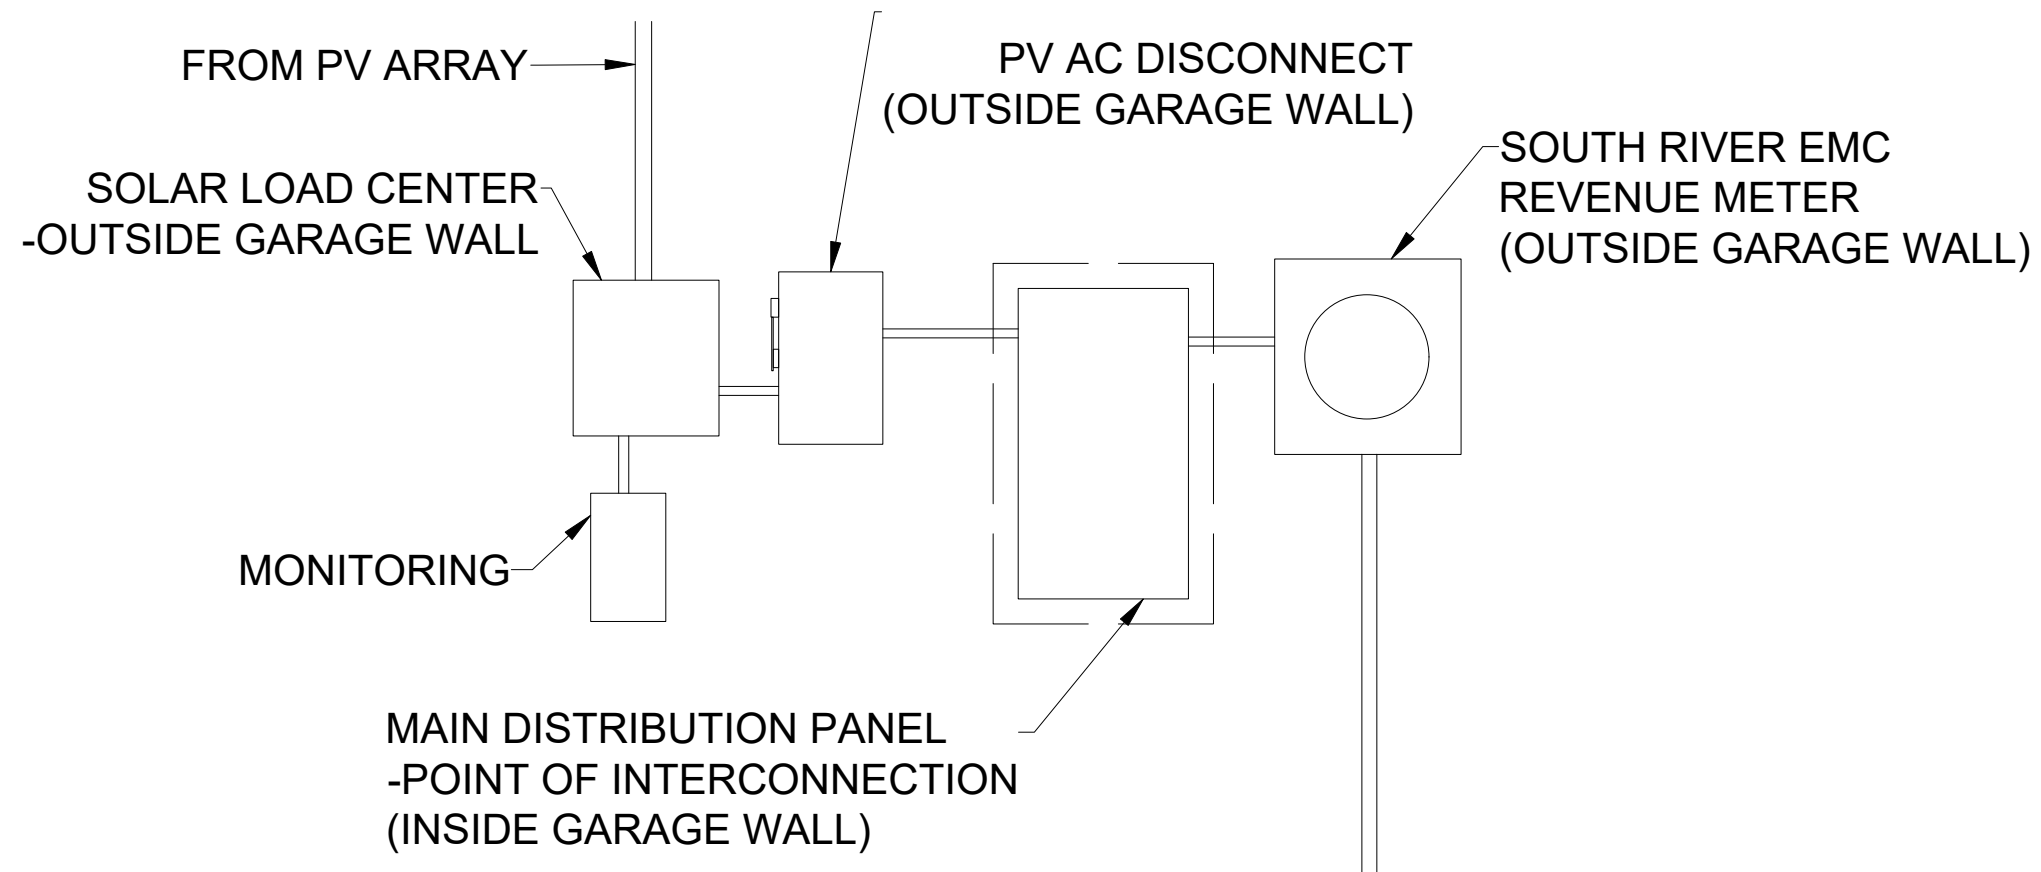

EQUIPMENT ELEVATION  
NTS 1

# QB2 ATTACHMENT

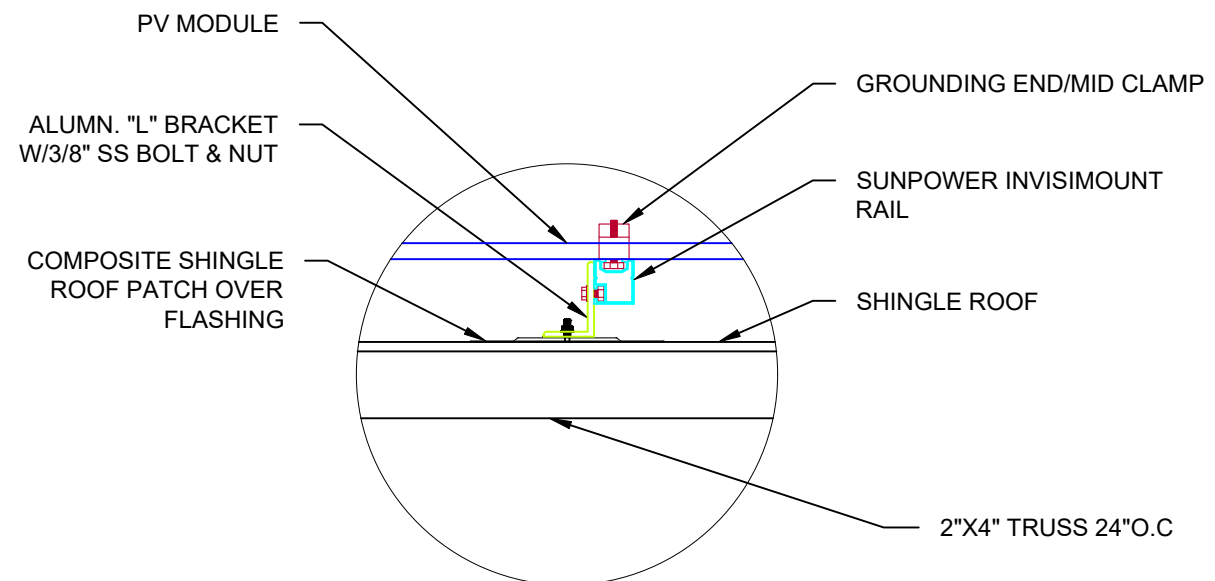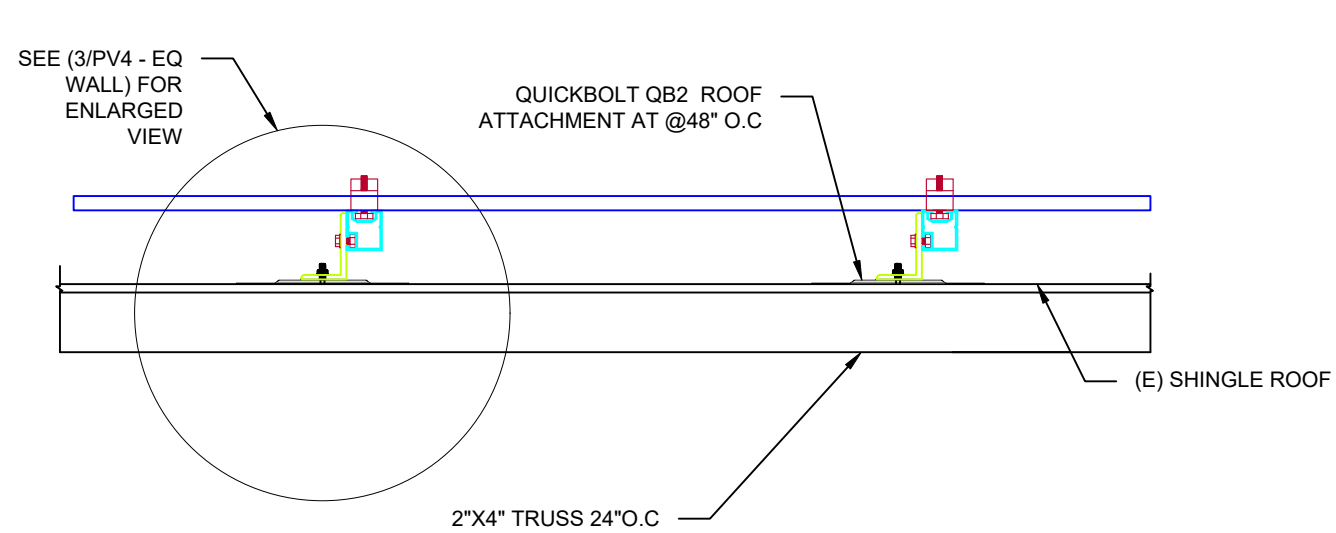

MOUNTING METHOD  
NTS 2

MOUNTING DETAIL  
NTS 3

DESIGN BY:  
FREEDOM SOLAR LLC

REVISIONS		
DESCRIPTION	DATE	REV
DESIGN PACKET	01/28/2023	A

CONTRACTOR

**FREEDOM**  
SOLAR POWER

FREEDOM SOLAR LLC  
4801 FREIDRICH LN, STE 100  
AUSTIN, TX 78744  
TECL # 28621  
TBPE FIRM # F-17690

PROJECT NAME

MOSBY, DAMON

510 ROLLING PINES DR  
SPRING LAKE, NORTH CAROLINA,  
28390  
(808) 469-5030

SHEET NAME

EQ.WALL & MOUNTING DETAIL

SHEET SIZE

ANSI B  
11" x 17"

SHEET NUMBER

PV-4

NOTE: NOT ALL LABELS MAY BE APPLICABLE

**WARNING**  
ELECTRIC SHOCK HAZARD.  
DO NOT TOUCH TERMINALS.  
TERMINALS ON BOTH THE  
LINE AND LOAD SIDES MAY BE  
ENERGIZED IN THE OPEN  
POSITION.

REQ'D BY: NEC 690.13 (B)

A

APPLY TO:  
PV DISCONNECT

**WARNING**  
-SOLAR LOAD CENTER-  
THIS EQUIPMENT FED BY  
MULTIPLE SOURCES, TOTAL RATING  
OF ALL OVERCURRENT DEVICES,  
EXCLUDING MAIN SUPPLY  
OVERCURRENT DEVICES, SHALL NOT  
EXCEED AMPACITY OF BUSBAR.

REQ'D BY: 705.12(B)(3)(3)

B

APPLY TO:  
SOLAR LOAD CENTER

**PV SYSTEM DISCONNECT**  
OPERATING CURRENT: 49.60 A  
OPERATING VOLTAGE: 240 VAC

REQ'D BY: NEC 690.13(B); 690.54

C

APPLY TO:  
PV DISCONNECT

**WARNING**  
POWER SOURCE OUTPUT  
CONNECTION. DO NOT  
RELOCATE THIS  
OVERCURRENT DEVICE

REQ'D BY: NEC 705.12(B)(3)(2)

D

APPLY TO:  
PV SYSTEM BREAKER

**WARNING**  
DUAL POWER SUPPLY  
SOURCES: UTILITY GRID AND  
PV SOLAR ELECTRIC SYSTEM

REQ'D BY: NEC 705.12(C)

E

MAIN SERVICE PANEL

**WARNING: PHOTOVOLTAIC  
POWER SOURCE**


REQ' BY: NEC 690.31(D)(2)\*

F

APPLY TO:  
CONDUIT EVERY 10 FT  
(\*ONLY REQUIRED FOR RACEWAYS  
WITH PV **DC** CIRCUITS)

**SOLAR PV SYSTEM EQUIPPED  
WITH RAPID SHUTDOWN**

TURN RAPID SHUTDOWN  
SWITCH TO THE "OFF"  
POSITION TO SHUT DOWN  
PV SYSTEM AND REDUCE  
SHOCK HAZARD IN THE  
ARRAY.



REQ'D BY: FREEDOM SOLAR

G

APPLY TO:  
MAIN DISTRIBUTION PANEL

**CAUTION:  
MULTIPLE SOURCES OF POWER**

POWER TO THIS BUILDING IS ALSO SUPPLIED FROM THE  
FOLLOWING SOURCES WITH DISCONNECTS AS SHOWN:

- UTILITY SUPPLY & CUSTOMER  
SERVICE PANEL
- PV AC DISCONNECT
- RAPID SHUTDOWN SWITCH

FRONT

REQ'D BY: 705.10\*

H

APPLY TO:  
MAIN DISTRIBUTION PANEL  
(\*ONLY REQUIRED IF PV SYSTEM  
DISCONNECT IS NOT GROUPED  
WITH MAIN SERVICE DISCONNECT)  
**SEE SHEET PV-6 FOR SITE  
SPECIFIC LABEL**

**ENERGY STORAGE  
SYSTEM DISCONNECT**  
NOMINAL AC VOLTAGE: XXX V  
MAXIMUM DC VOLTAGE: XXX V  
FAULT CURRENT:XXX V  
DATE OF CALCULATION:MM/DD/YY

REQ'D BY: 706.15(C)

I

APPLY TO:  
PW AC DISCONNECT

DESIGN BY:  
FREEDOM SOLAR LLC

REVISIONS

DESCRIPTION	DATE	REV
DESIGN PACKET	01/28/2023	A

CONTRACTOR



**FREEDOM™  
SOLAR POWER**

FREEDOM SOLAR LLC  
4801 FREIDRICH LN, STE 100  
AUSTIN, TX 78744  
TECL # 28621  
TBPE FIRM # F-17690

PROJECT NAME

MOSBY, DAMON  
510 ROLLING PINES DR  
SPRING LAKE, NORTH CAROLINA,  
28390  
(808) 469-5030

SHEET NAME

SYSTEM  
LABELING  
DETAIL


SHEET SIZE

ANSI B  
11" x 17"

SHEET NUMBER

PV-5

**CAUTION:**  
**MULTIPLE SOURCES OF POWER**  
 LOCATION OF EACH POWER SOURCE  
 DISCONNECTING MEANS SHOWN BELOW

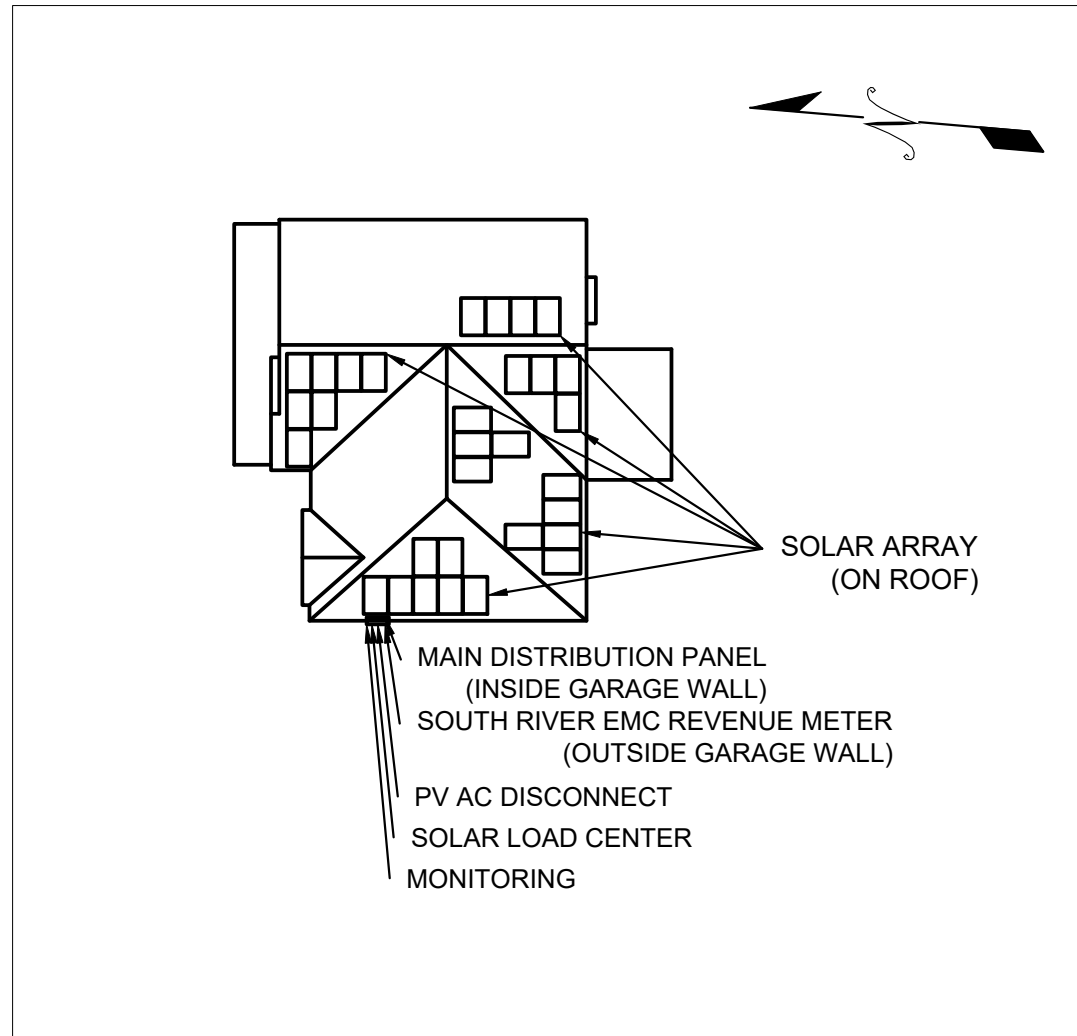

QUESTIONS, CALL:  
 800-504-2337  
[www.freedomsolarpower.com](http://www.freedomsolarpower.com)

**FREEDOM**  
**SOLAR POWER**  
 510 ROLLING PINES DR  
 PROJECT ID: 108985

DESIGN BY:  
 FREEDOM SOLAR LLC

REVISIONS		
DESCRIPTION	DATE	REV
DESIGN PACKET	01/28/2023	A

CONTRACTOR

**FREEDOM™**  
**SOLAR POWER**

FREEDOM SOLAR LLC  
 4801 FREIDRICH LN, STE 100  
 AUSTIN, TX 78744  
 TECL # 28621  
 TBPE FIRM # F-17690

PROJECT NAME

MOSBY, DAMON  
 510 ROLLING PINES DR  
 SPRING LAKE, NORTH CAROLINA,  
 28390  
 (808) 469-5030

SHEET NAME  
 SITE  
 DIRECTORY  
 PLACARD


SHEET SIZE  
 ANSI B  
 11" x 17"

SHEET NUMBER  
 PV-6



USE THE SAFETY SYMBOL KEY TO DRAW IN THE CONTROLLED ACCESS ZONE (CAZ), LADDER PLACEMENT, METER LOCATION, FALL PROTECTION ANCHOR POINT, AND ANY OTHER HAZARD.

HARD HAT IS REQUIRED AT ALL TIMES IN CAZ

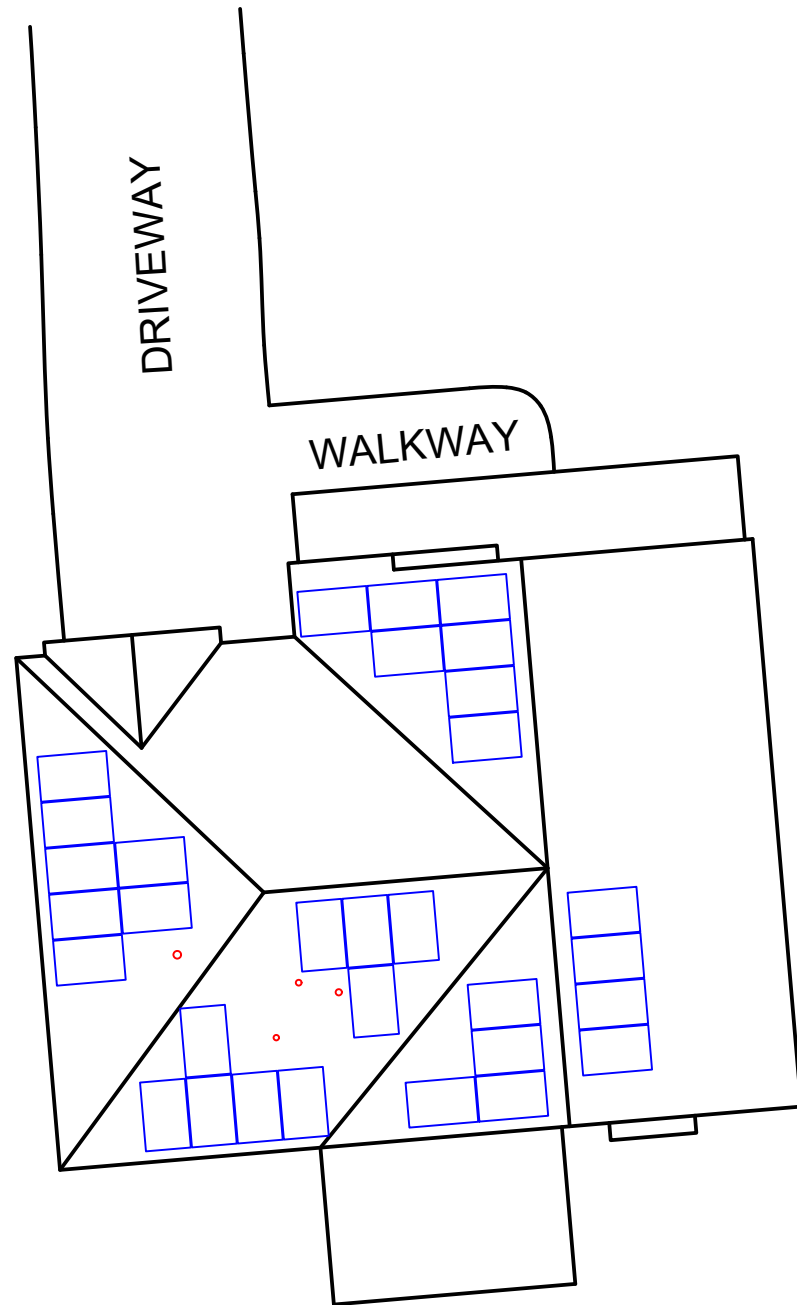

**SAFETY SYMBOL KEY**

- CAZ
- L** LADDER
- M** METER
- ==== POWER LINES
- R** RESTRAINT ANCHOR
- A** ARREST ANCHOR



DESIGN BY:  
FREEDOM SOLAR LLC

REVISIONS		
DESCRIPTION	DATE	REV
DESIGN PACKET	01/28/2023	A

CONTRACTOR

**FREEDOM™  
SOLAR POWER**

FREEDOM SOLAR LLC  
4801 FREIDRICH LN, STE 100  
AUSTIN, TX 78744  
TECL # 28621  
TBPE FIRM # F-17690

PROJECT NAME

MOSBY, DAMON

510 ROLLING PINES DR

SPRING LAKE, NORTH CAROLINA,  
28390

(808) 469-5030

SHEET NAME

SAFETY PLAN

SHEET SIZE

ANSI B  
11" x 17"

SHEET NUMBER

PV-7

CONDUCT SAFETY MEETING WITH ALL CREW MEMBERS ON SITE AT THE BEGINNING OF EACH JOB. USE SIGN IN SHEET BELOW.

1. \_\_\_\_\_
2. \_\_\_\_\_
3. \_\_\_\_\_
4. \_\_\_\_\_
5. \_\_\_\_\_

GUEST SIGN IN

1. \_\_\_\_\_
2. \_\_\_\_\_
3. \_\_\_\_\_

COMPETENT PERSON: \_\_\_\_\_ JOB START DATE: \_\_\_\_\_



### 420-440W Residential AC Module


#### SunPower® Maxeon® Technology

Built specifically for use with the SunPower Equinox® system, the only fully integrated solar solution designed, engineered, and warranted by one company.




#### Highest Power AC Density Available.

The patented, solid-copper foundation Maxeon Gen 6 cell is over 5% larger than prior generations, delivering the highest efficiency AC solar panel available.<sup>1</sup>

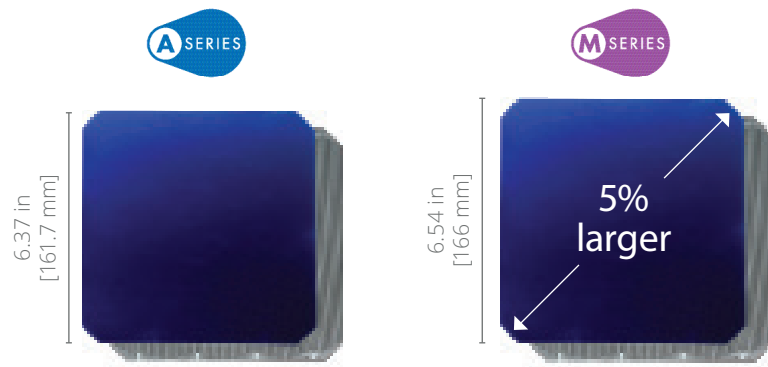

#### Part of the SunPower Equinox® Solar System

- Compatible with mySunPower™ monitoring
- Seamless aesthetics

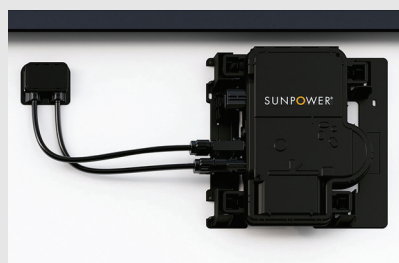


#### Factory-integrated Microinverter

- Highest-power integrated AC module in solar
- Engineered and calibrated by SunPower for SunPower AC modules



#### Highest Lifetime Energy and Savings

Designed to deliver 60% more energy over 25 years in real-world conditions like partial shade and high temperatures.<sup>2</sup>

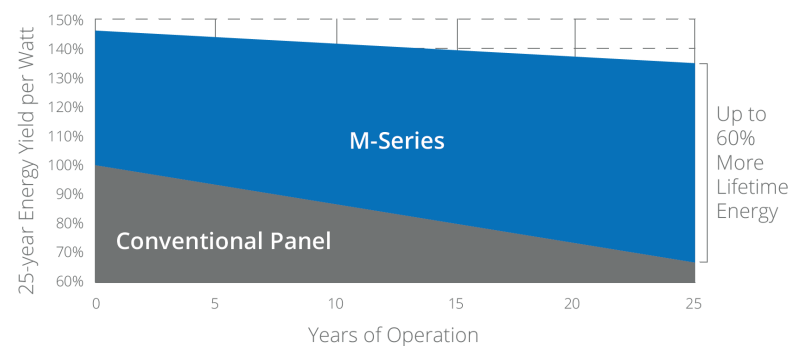

#### Best Reliability, Best Warranty

With more than 42.6 million and 15 GW modules deployed around the world, SunPower technology is proven to last. That's why we stand behind our module and microinverter with the industry's best 25-year Combined Power and Product Warranty.

AC Electrical Data		
	@240 VAC	@208 VAC
Inverter Model: Type H (Enphase IQ7HS)		
Peak Output Power (VA)	384	369
Max. Continuous Output Power (VA)	384	369
Nom. (L-L) Voltage/Range <sup>3</sup> (V)	240 / 211–264	208 / 183–229
Max. Continuous Output Current (Arms)	1.60	1.77
Max. Units per 20 A (L-L) Branch Circuit <sup>4</sup>	10	9
CEC Weighted Efficiency	97.0%	96.5%
Nom. Frequency	60 Hz	
Extended Frequency Range	47–68 Hz	
AC Short Circuit Fault Current Over 3 Cycles	4.82 A rms	
Overvoltage Class AC Port	III	
AC Port Backfeed Current	18 mA	
Power Factor Setting	1.0	
Power Factor (adjustable)	0.85 (inductive) / 0.85 (capacitive)	

DC Power Data					
	SPR-M440-H-AC	SPR-M435-H-AC	SPR-M430-H-AC	SPR-M425-H-AC	SPR-M420-H-AC
Nom. Power <sup>6</sup> (Pnom) W	440	435	430	425	420
Power Tolerance	+5/-0%				
Module Efficiency	22.8%	22.5%	22.3%	22.0%	21.7%
Temp. Coef. (Power)	-0.29% / °C				
Shade Tolerance	Integrated module-level max. power point tracking				

Tested Operating Conditions	
Operating Temp.	-40° F to +185°F (-40°C to +85°C)
Max. Ambient Temp.	122°F (50°C)
Max. Test Load <sup>8</sup>	Wind: 125 psf, 6000 Pa, 611 kg/m <sup>2</sup> back Snow: 187 psf, 9000 Pa, 917 kg/m <sup>2</sup> front
Max. Design Load	Wind: 75 psf, 3600 Pa, 367 kg/m <sup>2</sup> back Snow: 125 psf, 6000 Pa, 611 kg/m <sup>2</sup> front
Impact Resistance	1 inch (25 mm) diameter hail at 52 mph (23 m/s)

Mechanical Data	
Solar Cells	66 Maxeon Gen 6
Front Glass	High-transmission tempered glass with anti-reflective coating
Environmental Rating	Outdoor rated
Frame	Class 1 black anodized (highest AAMA rating)
Weight	48 lb (21.8 kg)
Recommended Max. Module Spacing	1.3 in. (33 mm)


1 Based on datasheet review of websites of top 20 manufacturers per Wood Mackenzie US PV Leaderboard Q3 2021.  
 2 Maxeon 435 W, 22.5% efficient, compared to a Conventional Panel on same-sized arrays (260 W, 16% efficient, approx. 1.6 m<sup>2</sup>), 7.9% more energy per watt (based on PVsyst pan files for avg. US climate), 0.5%/yr slower degradation rate (Jordan, et. al. "Robust PV Degradation Methodology and Application."PVSC 2018).  
 3 Voltage range can be extended beyond nominal if required by the utility.  
 4 Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.  
 5 Factory set to IEEE 1547a-2014 default settings. CA Rule 21 default settings profile set during commissioning.  
 6 Standard Test Conditions (1000 W/m<sup>2</sup> irradiance, AM 1.5, 25°C). All DC voltage is fully contained within the module.  
 7 UL Listed as PVRSE and conforms with NEC 2017 and NEC 2020 690.12 and C22.1-2015 Rule 64-218 Rapid Shutdown of PV Systems, for AC and DC conductors; when installed according to manufacturer's instructions.  
 8 Please read the safety and installation instructions for more information regarding load ratings and mounting configurations.

See [www.sunpower.com/company](http://www.sunpower.com/company) for more reference information. Specifications included in this datasheet are subject to change without notice.

©2022 SunPower Corporation. All rights reserved. SUNPOWER, the SUNPOWER logo, EQUINOX and MYSUNPOWER are trademarks or registered trademarks of SunPower Corporation in the U.S. MAXEON is a registered trademark of Maxeon Solar Technologies, Ltd. For more information visit [www.maxeon.com/legal](http://www.maxeon.com/legal).

Warranties, Certifications, and Compliance	
Warranties	<ul style="list-style-type: none"> <li>• 25-year limited power warranty</li> <li>• 25-year limited product warranty</li> </ul>
Certifications and Compliance	<ul style="list-style-type: none"> <li>• UL 1703</li> <li>• UL 1741 / IEEE-1547</li> <li>• UL 1741 AC Module (Type 2 fire rated)</li> <li>• UL 61730</li> <li>• UL 62109-1 / IEC 62109-2</li> <li>• FCC Part 15 Class B</li> <li>• ICES-0003 Class B</li> <li>• CAN/CSA-C22.2 NO. 107.1-01</li> <li>• CA Rule 21 (UL 1741 SA)<sup>5</sup></li> <li>(includes Volt/Var and Reactive Power Priority)</li> <li>• UL Listed PV Rapid Shutdown Equipment<sup>7</sup></li> </ul> Enables installation in accordance with: <ul style="list-style-type: none"> <li>• NEC 690.6 (AC module)</li> <li>• NEC 690.12 Rapid Shutdown (inside and outside the array)</li> <li>• NEC 690.15 AC Connectors, 690.33(A)-(E)(1)</li> </ul> When used with AC module Q Cables and accessories (UL 6703 and UL 2238): <ul style="list-style-type: none"> <li>• Rated for load break disconnect</li> </ul> When used with InvisiMount racking and InvisiMount accessories (UL 2703): <ul style="list-style-type: none"> <li>• Module grounding and bonding through InvisiMount</li> <li>• Class A fire rated</li> </ul>
PID Test	1000 V: IEC 62804

Packaging Configuration	
Modules per pallet	25
Packaging box dimensions	75.4 x 42. (1915 x 1072 x 1220 mm)
Pallet gross weight	1300.7 lb (590 kg)
Pallets per container	32
Net weight per container	41,623 lb (18,880 kg)

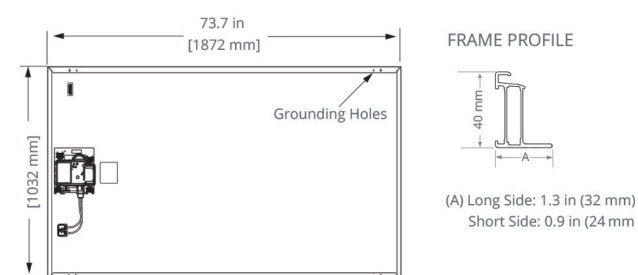

Please read the safety and installation instructions for details.



539973 RevD  
April 2022




# SunPower® EnergyLink™ | Residential and Commercial PVS6

## Improve Support, Reduce Maintenance Costs

An intuitive monitoring website enables you to:

- See a visual map of customer sites
- Remotely manage hundreds of sites
- Receive elective system reports
- Locate system issues and remotely diagnose
- Diagnose issues online
- Drill down for the status of individual devices

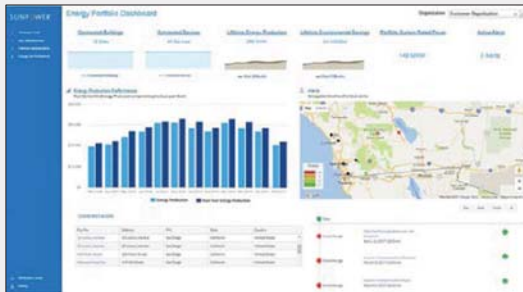

## Add Value for Customers

With the SunPower Monitoring System customers can:

- See what their solar system produces each day, month, or year
- Optimize their solar investment and save on energy expenses
- See their energy use and estimated bill savings
- See their solar system's performance using the SunPower monitoring website or mobile app



## SunPower EnergyLink—Plug-and-Play Installation

This complete solution for residential and commercial monitoring and control includes the SunPower® PV Supervisor 6 (PVS6) which improves the installation process, overall system reliability, and customer experience.

- Compact footprint for improved aesthetics
- Robust cloud connectivity and comprehensive local connectivity
- Flexible configuration of devices during installation
- Consumption metering
- Revenue-grade production metering (pending)
- Web-based commissioning
- Remote diagnostics of PVS6 and inverters
- Durable UL Type 3R enclosure reduces maintenance costs
- Easy integration with SunPower eBOS



## Robust Cloud Connectivity


Multiple options to maintain optimal connectivity:

- Hardwired Ethernet
- Wi-Fi
- Cellular backup



# SunPower® EnergyLink™ | Residential and Commercial PVS6


SunPower Monitoring Websites

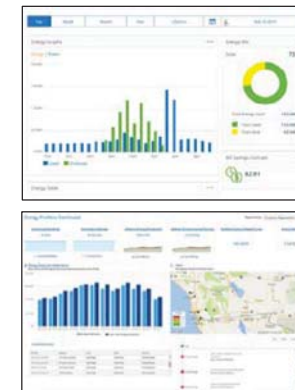

PVS6



SunPower AC Modules

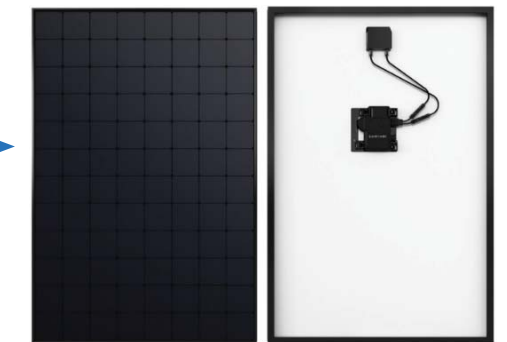

Multiple communication options include Ethernet, Wi-Fi, and cellular.

Site Requirements	
Number of SunPower AC modules supported per PVS6	85
Internet access	High-speed internet access via accessible router or switch
Power	<ul style="list-style-type: none"> <li>• 100–240 VAC (L–N), 50 or 60 Hz</li> <li>• 208 VAC (L–L in 3-phase), 60 Hz</li> </ul>

Operating Conditions	
Temperature	–22°F to +140°F (–30°C to +60°C)
Humidity (maximum)	95%, non-condensing

Mechanical	
Weight	5.5 lbs (2.5 kg)
Dimensions	11.8 × 8.0 × 4.2 in. (30.5 × 20.5 × 10.8 cm)
Enclosure rating	UL50E Type 3R

Communication	
RS-485	Inverters and meters
Integrated Metering	<ul style="list-style-type: none"> <li>• One channel of revenue-grade production metering</li> <li>• Two channels of consumption metering</li> </ul>
Ethernet	1 LAN (or optional WAN) port
PLC	PLC for SunPower AC modules
Wi-Fi	802.11b/g/n 2.4 GHz and 5 GHz
Cellular	LTE Cat-M1/3G UMTS
ZigBee	IEEE 802.15.4 MAC, 2.4GHz ISM band
Data Storage	60 days
Upgrades	Automatic firmware upgrades

Web and Mobile Device Support	
Customer site	<a href="http://monitor.us.sunpower.com">monitor.us.sunpower.com</a>
Partner site	<a href="http://pvsmgmt.us.sunpower.com">pvsmgmt.us.sunpower.com</a>
Browsers	Firefox, Safari, and Chrome
Mobile devices	iPhone®, iPad®, and Android™
Customer app	<ol style="list-style-type: none"> <li>1. Create account online at: <a href="http://monitor.us.sunpower.com">monitor.us.sunpower.com</a>.</li> <li>2. On a mobile device, download the SunPower Monitoring app from Apple App Store™ or Google Play™ store.</li> <li>3. Sign in using account email and password.</li> </ol>

Warranty and Certifications	
Warranty	10-year Limited Warranty
Certifications	UL, cUL, CE, UL 61010-1 and -2, FCC Part 15 (Class B)



© 2019 SunPower Corporation. All rights reserved. SUNPOWER, SUNPOWER logo, and ENERGYLINK are trademarks or registered trademarks of SunPower Corporation. iPhone and iPad are registered trademarks of Apple Inc. Android and Google Play are trademarks of Google Inc. All other trademarks are the property of their respective owners. Specifications included in this datasheet are subject to change without notice.

530536 RevC





## SunPower® InvisiMount™ | Residential Mounting System

### Simple and Fast Installation

- Integrated module-to-rail grounding
- Pre-assembled mid and end clamps
- Levitating mid clamp for easy placement
- Mid clamp width facilitates consistent, even module spacing
- UL 2703 Listed integrated grounding

### Flexible Design

- Addresses nearly all sloped residential roofs
- Design in landscape and portrait with up to 8' rail span
- Pre-drilled rails and rail splice
- Rails enable easy obstacle management

### Customer-Preferred Aesthetics

- #1 module and #1 mounting aesthetics
- Best-in-class system aesthetics
- Premium, low-profile design
- Black anodized components
- Hidden mid clamps and capped, flush end clamps

### Part of Superior System

- Built for use with SunPower DC and AC modules
- Best-in-class system reliability and aesthetics
- Optional rooftop transition flashing, rail-mounted J-box, and wire management rail clips
- Combine with SunPower modules and SunPower EnergyLink® monitoring app



### Elegant Simplicity

SunPower® InvisiMount™ is a SunPower-designed rail-based mounting system. The InvisiMount system addresses residential sloped roofs and combines faster installation time, design flexibility, and superior aesthetics. The InvisiMount product was specifically envisioned and engineered to pair with SunPower modules. The resulting system-level approach amplifies the aesthetic and installation benefits—for homeowners and for installers.

sunpower.com



## SunPower® InvisiMount™ | Residential Mounting System

### InvisiMount Components



InvisiMount Component Details		
Mid clamp	Black oxide stainless steel 300 series	63 g (2.2 oz)
End clamp	Black anodized aluminum 6000 series	110 g (3.88 oz)
Rail	Black anodized aluminum 6000 series	830 g/m (9 oz/ft)
Rail splice	Aluminum alloy 6000 series	830 g/m (9 oz/ft)
Rail bolt	M10-1.5 x 25 mm; custom T-head SS304	18 g (0.63 oz)
Rail nut	M10-1.5; DIN 6923 SS304	nominal
Ground lug assembly	SS304; A2-70 bolt; tin-plated copper lug	106.5 g (3.75 oz)
Row-to-row grounding clip	SS 301 with SS 304 M6 bolts	75 g (2.6 oz)
Row-to-row spacer	Black POM-grade plastic	5 g (0.18 oz)

InvisiMount Operating Conditions	
Temperature	-40° C to 90° C (-40° F to 194° F)
Max. Load (LRFD)	<ul style="list-style-type: none"> <li>• 3000 Pa uplift</li> <li>• 6000 Pa downforce</li> </ul>

Roof Attachment Hardware Supported by Design Tool	
Application	<ul style="list-style-type: none"> <li>• Composition Shingle Rafter Attachment</li> <li>• Composition Shingle Roof Decking Attachment</li> <li>• Curved and Flat Tile Roof Attachment</li> <li>• Universal interface for other roof attachments</li> </ul>

InvisiMount Component LRFD Capacities <sup>2</sup>		
Mid clamp	Uplift	664 lbf
	Shear	540 lbf
End clamp	Uplift	899 lbf
	Shear	220 lbf
Rail	Moment: upward	548 lbf-ft
	Moment: downward	580 lbf-ft
Rail splice	Moment: upward	548 lbf-ft
	Moment: downward	580 lbf-ft
L-foot	Uplift	1000 lbf
	Shear	390 lbf

InvisiMount Warranties And Certifications	
Warranties	<ul style="list-style-type: none"> <li>• 25-year product warranty</li> <li>• 5-year finish warranty</li> </ul>
Certifications	<ul style="list-style-type: none"> <li>• UL 2703 Listed</li> <li>• Class A Fire Rated</li> </ul>



Roof Attachment Hardware Warranties	
Refer to roof attachment hardware manufacturer's documentation.	

<sup>1</sup> Module frame that is compatible with the InvisiMount system required for hardware interoperability.  
<sup>2</sup> SunPower recommends that all Equinox™, InvisiMount™, and AC module systems always be designed using the InvisiMount Span Tables #524734. If a designer decides to instead use the component capacities listed in this document to design a system, note that the capacities shown are Load and Resistance Factor Design (LRFD) design loads, and are NOT to be used for Allowable Stress Design (ASD) calculations; and that a licensed Professional Engineer (PE) must then stamp all calculations. If you have any questions please contact SunPower Technical Support at 1-855-977-7867.

© 2018 SunPower Corporation. All Rights Reserved. SUNPOWER, the SUNPOWER logo, EQUINOX, and INVISIMOUNT are trademarks or registered trademarks of SunPower Corporation. All other trademarks are the property of their respective owners. Specifications included in this datasheet are subject to change without notice.

# SPEC SHEET

Part #	Box Quantity
17660	4" QB2 (25)
17662	3" Microflashing® (25); 4" QB2 (25); L-Foot (25)

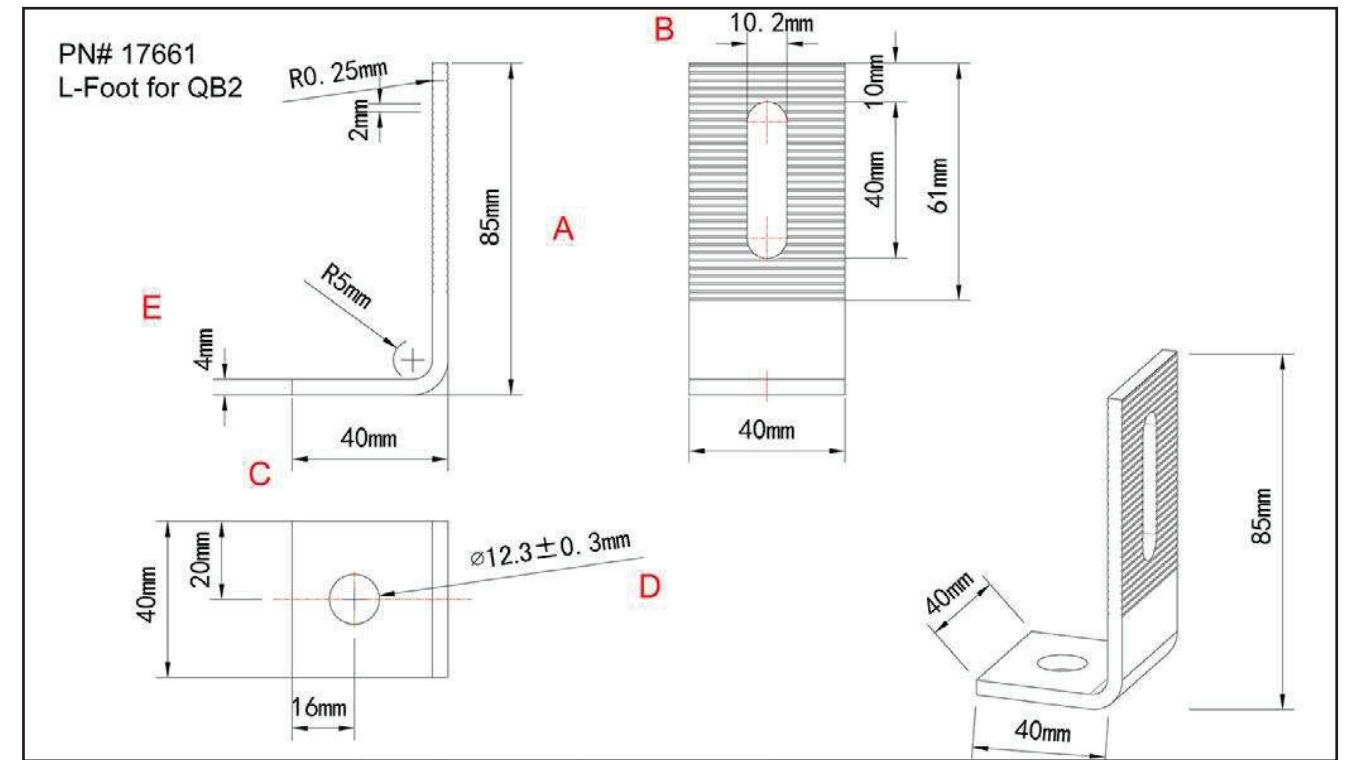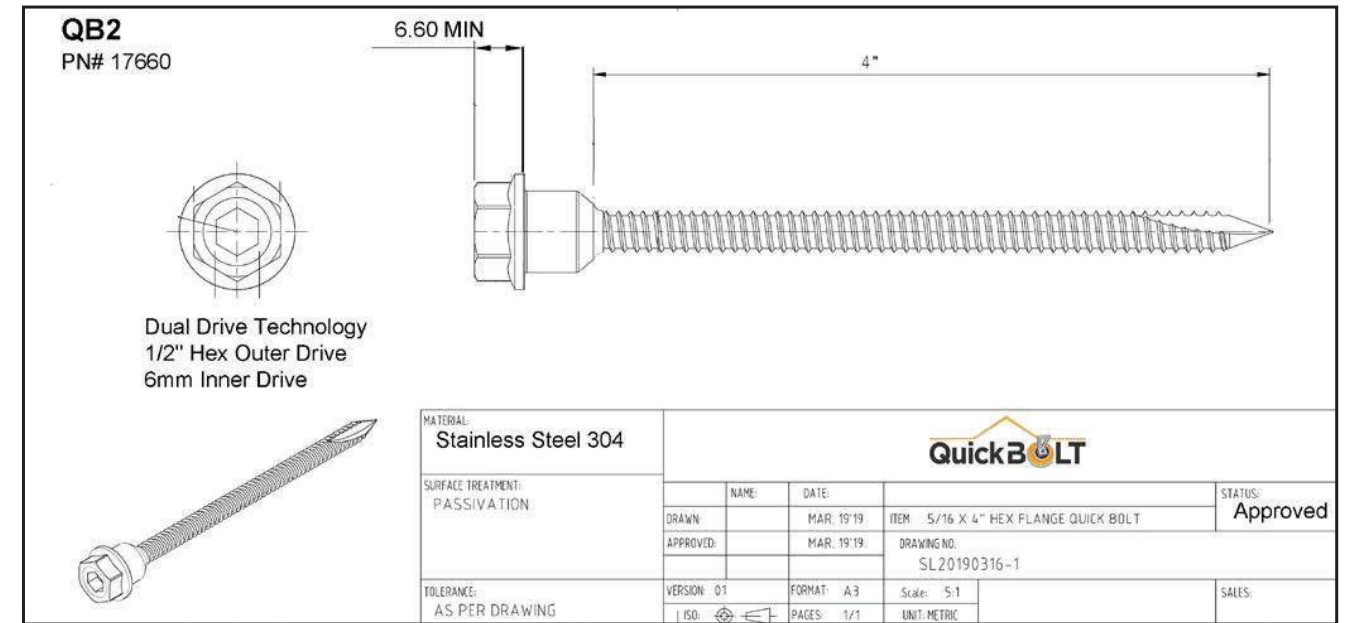

# Non-Fusible Switching Devices & Safety Switches

## Product Selection

UL listed File No. E5239

1

DG321NRB

### 120/240 Vac General-Duty, Fusible, Single-Throw, continued



System	Ampere Rating	Fuse Type Provision	Maximum Horsepower Ratings <sup>①</sup>			DC 250V	NEMA 1 Enclosure Indoor Catalog Number	NEMA 3R Enclosure Rainproof Catalog Number
			Single-Phase AC 120V	240V	Three-Phase AC 240V			
<b>Cartridge Type—Three-Pole, Three-Wire (Three Blades, Three Fuses)—240 Vac</b>								
	30	—	—	—	—	—	②	②
	60	—	—	—	—	—	②	②
	100	—	—	—	—	—	②	②
	200	H	—	15	25-60	—	DG324FGK <sup>③④</sup>	②
	400	H	—	—	50-125	—	DG325FGK <sup>③④</sup>	DG325FRK <sup>③④</sup>
	600	H	—	—	75-200	—	DG326FGK <sup>③④</sup>	DG326FRK <sup>③④</sup>
<b>Cartridge Type—Four-Wire (Three Blades, Three Fuses, S/N)—120/240 Vac</b>								
	30	H	—	1-1/2-3	3-7-1/2	—	DG321NGB	DG321NRB
	60	H	—	3-10	7-1/2-15	—	DG322NGB	DG322NRB
	100	H	—	7-1/2-15	15-30	—	DG323NGB	DG323NRB
	200	H	—	15	25-60	—	DG324NGK	DG324NRK
	400	H	—	—	50-125	—	DG325NGK	DG325NRK
	600	H	—	—	75-200	—	DG326NGK	DG326NRK

DG322URB

### 120/240 Vac General-Duty, Non-Fusible, Single-Throw



System	Ampere Rating	Maximum Horsepower Ratings			DC 250V	NEMA 1 Enclosure Indoor Catalog Number	NEMA 3R Enclosure Rainproof Catalog Number
		Single-Phase AC 120V	240V	Three-Phase AC 240V			
<b>Two-Pole, Two-Wire (Two Blades)—240 Vac</b>							
	30	2	3	—	—	DG221UGB <sup>④</sup>	DG221URB <sup>④</sup>
	60	3	10	—	—	DG222UGB <sup>④</sup>	DG222URB <sup>④</sup>
	100	—	15	—	—	DG223UGB <sup>④</sup>	DG223URB <sup>④</sup>
	200	—	15	—	—	④⑤	DG224URK <sup>④</sup>
<b>Three-Pole, Three-Wire (Three Blades)—240 Vac</b>							
	30	2	3	7-1/2	—	DG321UGB <sup>④</sup>	DG321URB <sup>④</sup>
	60	3	10	15	—	DG322UGB <sup>④</sup>	DG322URB <sup>④</sup>
	100	—	15	30	—	DG323UGB <sup>④</sup>	DG323URB <sup>④</sup>
	200	—	15	60	—	DG324UGK <sup>④</sup>	DG324URK <sup>④</sup>
	400	—	—	125	—	DG325UGK <sup>④</sup>	DG325URK <sup>④</sup>
	600	—	—	200	—	DG326UGK <sup>④</sup>	DG326URK <sup>④</sup>

**Notes**

- ① Maximum hp ratings apply only when dual element time delay fuses are used.
  - ② Use four-wire catalog numbers below.
  - ③ Solid neutral bars are not included. Order separately from table on Page V2-T1-13.
  - ④ **WARNING!** Switch is not approved for service entrance unless a neutral kit is installed.
  - ⑤ Use three-wire catalog numbers below.
- All general-duty safety switches are individually packaged.
- Accessories are limited in scope on general-duty safety switches. See Page V2-T1-13 for availability. In addition, clear line shields are available as an accessory on 200-600A general-duty switches. Catalog Numbers: 200A = 70-7759-11, 400A = 70-8063-8, 600A = 70-8064-8.

# Fusible Switching Devices & Safety Switches

## Product Selection

### 120/240 Vac General-Duty, Fusible, Single Throw

#### Specifications

- 30 – 600 amperes.
- Suitable for service entrance applications unless otherwise noted.
- Horsepower rated.
- Bolt-on hub provision. Provided for general-duty switches in a NEMA 3R enclosure. See Page 8-7 for selection.
- UL listed File No. E5239. Meets UL 98 for enclosed switches and NEMA Std. KS-1.
- 200 – 600 ampere switches incorporate K-Series design.



DP221NGB



DG321NRB

2

Table 8-40. 120/240 Vac General-Duty, Fusible, Single Throw

System	Ampere Rating	Fuse Type Provision	Maximum Horsepower Ratings <sup>①</sup>				NEMA 1 Enclosure Indoor		NEMA 3R Enclosure Rainproof	
			Single-Phase ac		3-Phase ac	dc	Catalog Number	Price U.S. \$	Catalog Number	Price U.S. \$
			120 Volt	240 Volt	240 Volt	250 Volt				

**Fusible — Plug Type<sup>②</sup>**

**2-Wire (One Blade, One Fuse, S/N) — 120 Vac**

	30	Plug (Type S, T or W)	1/2-2	—	—	—	—	DP111NGB	—	—
--	----	-----------------------	-------	---	---	---	---	----------	---	---

**3-Wire (Two Blades, Two Fuses, S/N) — 120/240 Vac**

	30	Plug (Type S, T or W)	1/2-2	1-1/2-3	—	—	—	DP221NGB	—	Use cartridge-type fuse catalog number DG221NRB
--	----	-----------------------	-------	---------	---	---	---	----------	---	---

**Fusible — Cartridge Type**

**2-Pole 2-Wire (Two Blades, Two Fuses) — 240 Vac**

	30	—	—	1-1/2-3	3-7-1/2	—	③	—	③	—
	60	—	—	3-10	7-1/2-15	—	③	—	③	—
	100	—	—	7-1/2-15	15-30	—	③	—	③	—
	200	—	—	15	25-60	—	③	—	③	—
	400	H	—	—	50-125	—	—	DG225FGK <sup>④⑤</sup>	—	DG225FRK <sup>④⑤</sup>
	600	H	—	—	75-200	—	—	DG226FGK <sup>④⑤</sup>	—	DG226FRK <sup>④⑤</sup>

**3-Wire (Two Blades, Two Fuses, S/N) — 120/240 Vac**

	30	H	—	1-1/2-3	3-7-1/2 <sup>⑥</sup>	—	—	DG221NGB	—	DG221NRB
	60	H	—	3-10	7-1/2-15 <sup>⑥</sup>	—	—	DG222NGB	—	DG222NRB
	100	H	—	7-1/2-15	15-30 <sup>⑥</sup>	—	—	DG223NGB	—	DG223NRB
	200	H	—	15	25-60 <sup>⑥</sup>	—	—	DG224NGK	—	DG224NRK
	400	H	—	—	50-125 <sup>⑥</sup>	50	—	DG225NGK	—	DG225NRK
	600	H	—	—	75-200 <sup>⑥</sup>	—	—	DG226NGK	—	DG226NRK

- ① Maximum hp ratings apply only when dual element time delay fuses are used.
- ② These switches do not have an interlock which prevents door from being opened when switch is in the ON position.
- ③ Use 3-wire catalog numbers below.
- ④ Solid neutral bars are not included. Order separately from Table 8-1 on Page 8-5.
- ⑤ **WARNING!** Switch is not approved for service entrance unless a neutral kit is installed.
- ⑥ Grounded B phase rating, UL listed.

**Note:** All general-duty safety switches are individually packaged.

**Note:** Accessories are limited in scope on general-duty safety switches. See Page 8-5 for availability. In addition, clear line shields are available as an accessory on 200 – 600 ampere general-duty switches. Catalog Numbers: 200 A = 70-7759-11, 400 A = 70-8063-8, 600 A = 70-8064-8.

**FRN-R (250 V) and FRS-R (600 V) Class RK5 Fusetron™ energy efficient, dual-element, time-delay fuses**

Dual-element, time-delay Class RK5 fuses. FRN-R — 10 seconds (minimum) at 500% rated amps (8 seconds for 0-30 A sizes). FRS-R — 10 seconds (minimum) at 500% rated amps. FRN-R and FRS-R available with optional indication on select ratings (see catalog numbers table). For superior electrical protection, Eaton recommends upgrading to Bussmann series Low-Peak LPN-RK (250 V) or LPS-RK (600 V) fuses, see pages 1-24 to 1-26. For dimensions, see page 1-3.

**Ratings**

- Volts
  - FRN-R
    - 250 Vac (or less)
    - 125 Vdc (1/10-60 A, 110-200 A)
    - 250 Vdc (225-600 A)
  - FRS-R
    - 600 Vac (or less)
    - 300 Vdc 1/10-30 A, 65-600 A
    - 250 Vdc\* 35-60 A
- Amps 1/10-600 A
- IR
  - 200 kA RMS Sym.
  - 20 kA DC



\* Does not apply to indicating versions.

**Agency information**

- FRN-R
  - UL Listed, Std 248-12, Class RK5, Guide JDDZ, File E4273
  - CSA Certified, Class 1422-01, File 53787
- FRS-R
  - UL Listed, Std 248-12, Class RK5, Guide JDDZ, File E4273
  - CSA Certified, Class 1422-02, File 53787
- CE

**Features**

- Separate overload and short-circuit elements provide time-delay for sizing as close as 125% of motor FLA
- 2:1 selective coordination amp ratio (within the Fusetron RK5 fuse family) helps prevent overcurrent events from opening upstream Fusetron fuses
- Insulated end caps for 225-600 A (FRN-R) and 65-600 A (FRS-R) fuses reduces exposure to live parts and extends air gap to distance between blades of adjacent mounted fuses or to housing

**Typical applications**

- Power panelboards
- Motor control centers
- Combination starters
- Machinery disconnects

**Catalog no. (amps)**

250 V FRN-R			
FRN-R-1/10	FRN-R-2	FRN-R-10*	FRN-R-100
FRN-R-1/8	FRN-R-2-1/4	FRN-R-12*	FRN-R-110
FRN-R-15/100	FRN-R-2-1/2	FRN-R-15*	FRN-R-125
FRN-R-2/10	FRN-R-2-8/10	FRN-R-17-1/2*	FRN-R-150
FRN-R-1/4	FRN-R-3	FRN-R-20*	FRN-R-175
FRN-R-3/10	FRN-R-3-2/10	FRN-R-25*	FRN-R-200
FRN-R-4/10	FRN-R-3-1/2	FRN-R-30*	FRN-R-225
FRN-R-1/2	FRN-R-4	FRN-R-35*	FRN-R-250
FRN-R-6/10	FRN-R-4-1/2	FRN-R-40*	FRN-R-300
FRN-R-8/10	FRN-R-5	FRN-R-45*	FRN-R-350
FRN-R-1	FRN-R-5-6/10	FRN-R-50*	FRN-R-400
FRN-R-1-1/8	FRN-R-6	FRN-R-60*	FRN-R-450
FRN-R-1-1/4	FRN-R-6-1/4	FRN-R-70	FRN-R-500
FRN-R-1-4/10	FRN-R-7	FRN-R-75	FRN-R-600
FRN-R-1-1/2	FRN-R-7-1/2	FRN-R-80	
FRN-R-1-6/10	FRN-R-8*	FRN-R-85	
FRN-R-1-8/10	FRN-R-9*	FRN-R-90	
600 V FRS-R			
FRS-R-1/10	FRS-R-2	FRS-R-10*	FRS-R-100
FRS-R-1/8	FRS-R-2-1/4	FRS-R-12*	FRS-R-110
FRS-R-15/100	FRS-R-2-1/2	FRS-R-15*	FRS-R-125
FRS-R-2/10	FRS-R-2-8/10	FRS-R-17-1/2*	FRS-R-150
FRS-R-1/4	FRS-R-3	FRS-R-20*	FRS-R-175
FRS-R-3/10	FRS-R-3-2/10	FRS-R-25*	FRS-R-200
FRS-R-4/10	FRS-R-3-1/2	FRS-R-30*	FRS-R-225
FRS-R-1/2	FRS-R-4	FRS-R-35*	FRS-R-250
FRS-R-6/10	FRS-R-4-1/2	FRS-R-40*	FRS-R-300
FRS-R-8/10	FRS-R-5	FRS-R-45*	FRS-R-350
FRS-R-1	FRS-R-5-6/10	FRS-R-50*	FRS-R-400
FRS-R-1-1/8	FRS-R-6*	FRS-R-60*	FRS-R-450
FRS-R-1-1/4	FRS-R-6-1/4*	FRS-R-65	FRS-R-500
FRS-R-1-4/10	FRS-R-7*	FRS-R-70	FRS-R-600
FRS-R-1-1/2	FRS-R-7-1/2*	FRS-R-75	
FRS-R-1-6/10	FRS-R-8*	FRS-R-80	
FRS-R-1-8/10	FRS-R-9*	FRS-R-90	

\* Available with indication To order, place "ID" at the end of the catalog number. Example: FRN-R-30ID or FRS-R-7ID.

Recommended blocks for Class RK5 fuses, see page 1-2.

Low voltage, branch circuit fuses

**Data sheet no. FRN-R; 1019 (up to 60 A), 1020 (70-600 A)  
FRS-R 1017 (up to 60 A), 1018 (70-600 A)**

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

CH42L225G



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral—Factory-Installed Ground Bar







Main Ampere Rating	Maximum Number 3/4-Inch (19.1 mm) Poles	Enclosure Type	Box Size	Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs	Loadcenter Catalog Number	Loadcenter Cover Catalog Number	Combination	Surface
125	12	Indoor	B	#6–2/0	CH12L125B ①	CH8BF	CH8BS	
	12	Outdoor	B	#6–2/0	CH12L125R ①②	—	—	
	16	Indoor	B	#6–2/0	CH16L125B ①	CH8BF	CH8BS	
	16	Outdoor	B	#6–2/0	CH16L125R ①②	—	—	
	20	Indoor	C	#6–2/0	CH20L125C ①	CH8CF	CH8CS	
	20	Outdoor	C	#6–2/0	CH20L125R ①②	—	—	
	24	Indoor	C	#6–2/0	CH24L125C ①	CH8CF	CH8CS	
	24	Outdoor	C	#6–2/0	CH24L125R ①②	—	—	
150	24	Indoor	D	#4–300 kcmil	CH24L150D ①	CH8DF	CH8DS	
	24	Outdoor	D	#4–300 kcmil	CH24L150R ②③	—	—	
	32	Indoor	D	#4–300 kcmil	CH32L150D ①	CH8DF	CH8DS	
	32	Outdoor	D	#4–300 kcmil	CH32L150R ②③	—	—	
200	12	Indoor	D	#4–300 kcmil	CH12L200D ①	CH8DF	CH8DS	
	12	Outdoor	D	#4–300 kcmil	CH12L200R ②③	—	—	
	16	Indoor	D	#4–300 kcmil	CH16L200D ①	CH8DF	CH8DS	
	16	Outdoor	D	#4–300 kcmil	CH16L200R ②③	—	—	
225	24	Indoor	D	#4–300 kcmil	CH24L225D ①	CH8DF	CH8DS	
	24	Outdoor	D	#4–300 kcmil	CH24L225R ②③	—	—	
	32	Indoor	D	#4–300 kcmil	CH32L225D ①	CH8DF	CH8DS	
	32	Outdoor	D	#4–300 kcmil	CH32L225R ②③	—	—	
	42	Indoor	G	#4–300 kcmil	CH42L225G ③	CH8GF	CH8GS	
	42	Outdoor	G	#4–300 kcmil	CH42L225R ②③	—	—	
400	42	Indoor	P	(2) 1/0–300 kcmil (1) 750 kcmil	CH42PL400 ④	CH7PF ⑤	CH7PS	

#### Notes


- ① Suitable for use as service equipment when not more than six disconnecting means are provided and when not used as a lighting and appliance panelboard (see Article 408.34 of the NEC).
- ② Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-25**.
- ③ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and requires hold-down bracket kit catalog number **CH125RB**.
- ④ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and must be a Type CHB.  
**The breaker cannot be a Type CH.**
- ⑤ This cover is for flush application only (not combination).

Box sizes **Pages V1-T1-27** and **V1-T1-28**.



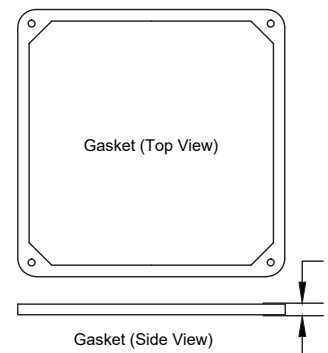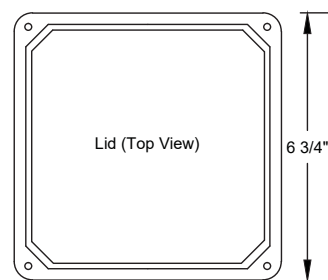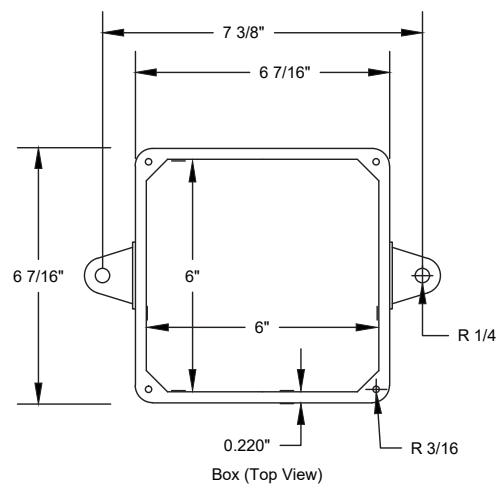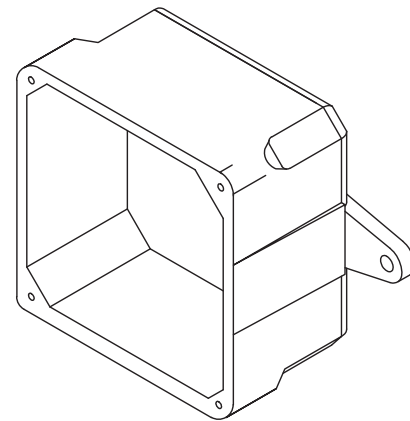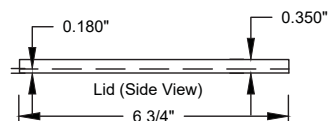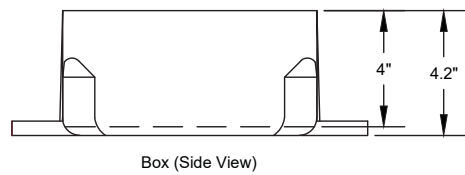

UL Listed  
 Marine Listed  
 UL File # E205935 (QCUP)  
 UL Control # 92CM  
 Material is Rigid PVC  
 132 cu in Volume (2163 cu cm)  
 Screws are Zinc Plated Steel  
 Gasket is neoprene



<b>CANTEX</b> INC. Fort Worth, TEXAS		
<b>Junction Box 6 x 6 x 4</b>		
Drawn By: O.M.	Date: 6/19/17	5133710

## 1.4 Listings, Compatibility, and Classification

The SunPower InvisiMount Residential Mounting System is UL 2703 Listed. The InvisiMount Listing **includes** the following modules, which have been tested for grounding and mechanical load with the InvisiMount system.

For Classic InvisiMount certification information, refer to UL at their site <https://www.ul.com> or the at the UL portal <https://www.ul.com/resources/apps/myul-client-portal> and view *File E314938* and *File E466981*. For Universal InvisiMount certification information, refer to Intertek at [https://ramuk.intertekconnect.com/WebClients/ITS/DLP/products.nsf/\\$\\$Search?OpenForm](https://ramuk.intertekconnect.com/WebClients/ITS/DLP/products.nsf/$$Search?OpenForm) and view *Control Number 5024883*.

SunPower DC Modules	SunPower AC Modules	
<ul style="list-style-type: none"> <li>• SPR-A400-BLK-DC</li> <li>• SPR-A400-DC</li> <li>• SPR-A410-DC</li> <li>• SPR-E19-320</li> <li>• SPR-E20-327</li> <li>• SPR-X21-335-BLK</li> <li>• SPR-X21-350-BLK</li> <li>• SPR-X21-345</li> <li>• SPR-X22-360</li> <li>• SPR-X22-370</li> </ul>	<ul style="list-style-type: none"> <li>• SPR-A400-BLK-G-AC</li> <li>• SPR-A390-G-AC</li> <li>• SPR-A400-G-AC</li> <li>• SPR-A410-G-AC</li> <li>• SPR-A415-G-AC</li> <li>• SPR-A425-G-AC</li> <li>• SPR-M415-BLK-H-AC</li> <li>• SPR-M425-BLK-H-AC</li> <li>• SPR-M420-H-AC</li> <li>• SPR-M435-H-AC</li> <li>• SPR-M440-H-AC</li> </ul>	<ul style="list-style-type: none"> <li>• SPR-X22-370-E-AC</li> <li>• SPR-X22-360-E-AC</li> <li>• SPR-X21-350-BLK-E-AC</li> <li>• SPR-X21-335-BLK-E-AC</li> <li>• SPR-X20-327-BLK-E-AC</li> <li>• SPR-X21-345-E-AC</li> <li>• SPR-X21-335-E-AC</li> <li>• SPR-X20-327-E-AC</li> <li>• SPR-E20-327-E-AC</li> <li>• SPR-E19-320-E-AC</li> </ul>

With Universal InvisiMount:

Manufacturer	Module Model / Series
SunPower	<ul style="list-style-type: none"> <li>• SPR-Axxx-COM (may be followed by -BLK), where xxx can be 380–460.</li> <li>• SPR-Axxx-yyy-MLSD, where xxx can be 350–460 and where yyy can be -COM and/or -300 V.</li> </ul>
Aptos	<ul style="list-style-type: none"> <li>• DNA-120-MF26-xxxW, where xxx is wattage.</li> <li>• DNA-108-BF10-xxxW, where xxx is wattage.</li> <li>• DNA-120-BF26-xxxW where xxx is 350–370.</li> </ul>
Hanwha	<ul style="list-style-type: none"> <li>• Q.PEAK DUO BLK ML-G10.a+ xxx, where xxx can be 370–425.</li> </ul>


REC	<ul style="list-style-type: none"> <li>• RECxxxNP2, where xxx can be 350–380.</li> <li>• RECxxxNP2 Black, where xxx can be 350–380.</li> <li>• RECxxxTP4, where xxx can be 350–380.</li> <li>• RECxxxTP4 Black, where xxx can be 350–380.</li> <li>• RECxxxAA, where xxx can be 340–385.</li> <li>• RECxxxAA Black, where xxx can be 340–385.</li> <li>• RECxxxAA Pure, where xxx can be 380–415.</li> </ul>
Trina	<ul style="list-style-type: none"> <li>• TSM-xxxDE06X.05(II), where xxx can be 355–380.</li> </ul>
Jinko	<ul style="list-style-type: none"> <li>• JKMxxxM-6RL3-B, where xxx can be 365–400.</li> </ul>
Canadian Solar	<ul style="list-style-type: none"> <li>• Canadian Solar: CS3NxxxMS where xxx is 380–405.</li> </ul>
Waaree	<ul style="list-style-type: none"> <li>• WSMDi-xxx where xxx is 395–415.</li> </ul>

System Design Load Rating: 10 PSF downward, 5 PSF upward, 5 PSF lateral. Actual system structural capacity is defined by the *InvisiMount Span Tables 524734*.

Grounding from the module to the rail is accomplished through the clamps. See Section 1.5 for more information. The Listing also includes the following components, which have been evaluated for both mounting and bonding in accordance with UL 2703:


- End clamp
- Mid clamp
- Rail
- Splice and splice screw
- Ground lug assembly
- L-foot
- Row-to-row (R2R) grounding clip
- Row-to-row (R2R) grounding jumper
- Row-to-row (R2R) spacer
- Rail-mounted grounding junction box (RMJ)

### SunPower Classic InvisiMount™ Ground Path and Compliance

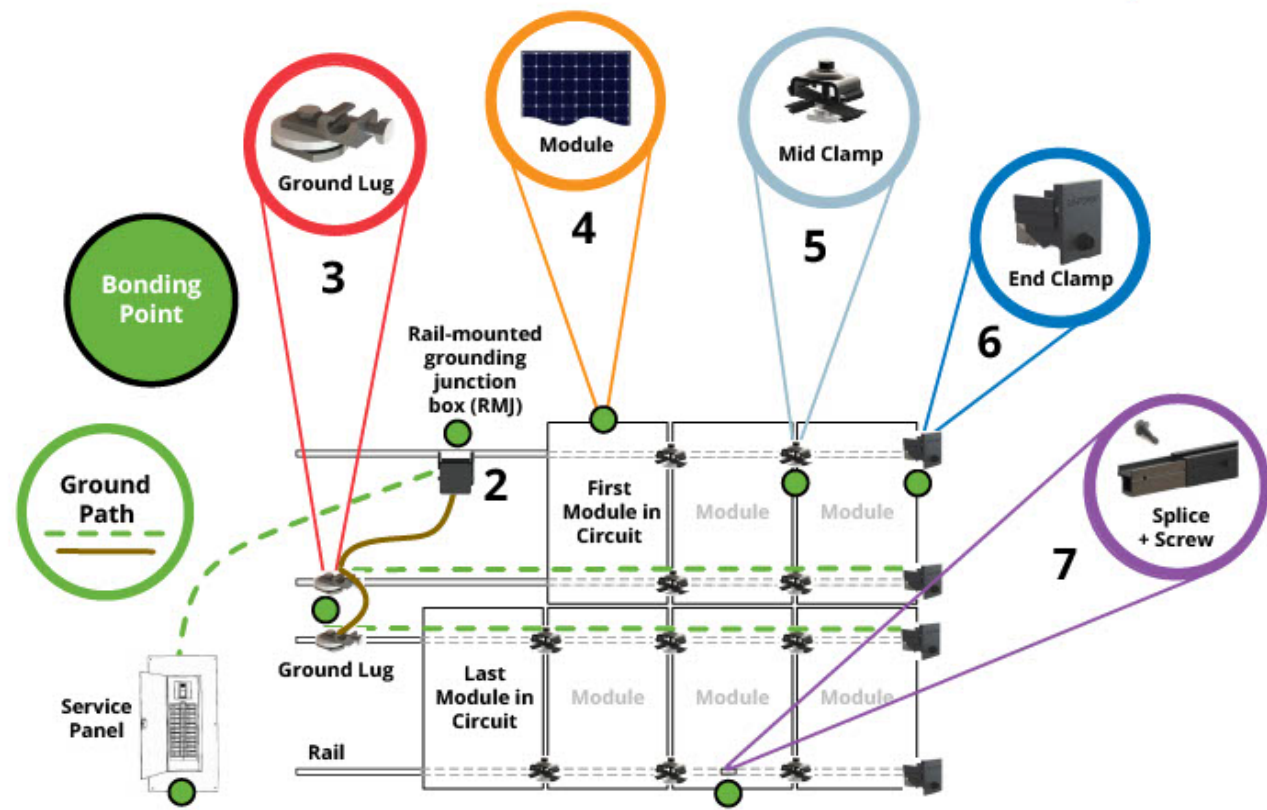

Bonding Components		Compliance	
		NEC	UL
1	Grounding Electrode to Service Panel	690.47(A) 690.47(D)	n/a
2	Service Panel to Ground Wire	690.43(C)	1741
3	Ground Wire to Ground Lug to Rail	690.43(C)	2703
4	Module Frame	n/a	1703
5	Rail to Mid Clamp to Module Frame	690.43(A) 690.43(C) 690.43(D)	2703
6	Module Frame to End Clamp to Rail	690.43(A) 690.43(C) 690.43(D)	2703
7	Rail to Splice	690.43(A) 690.43(C) 690.43(D)	2703

### SunPower Classic InvisiMount™ with R2R Grounding Clip Ground Path and Compliance

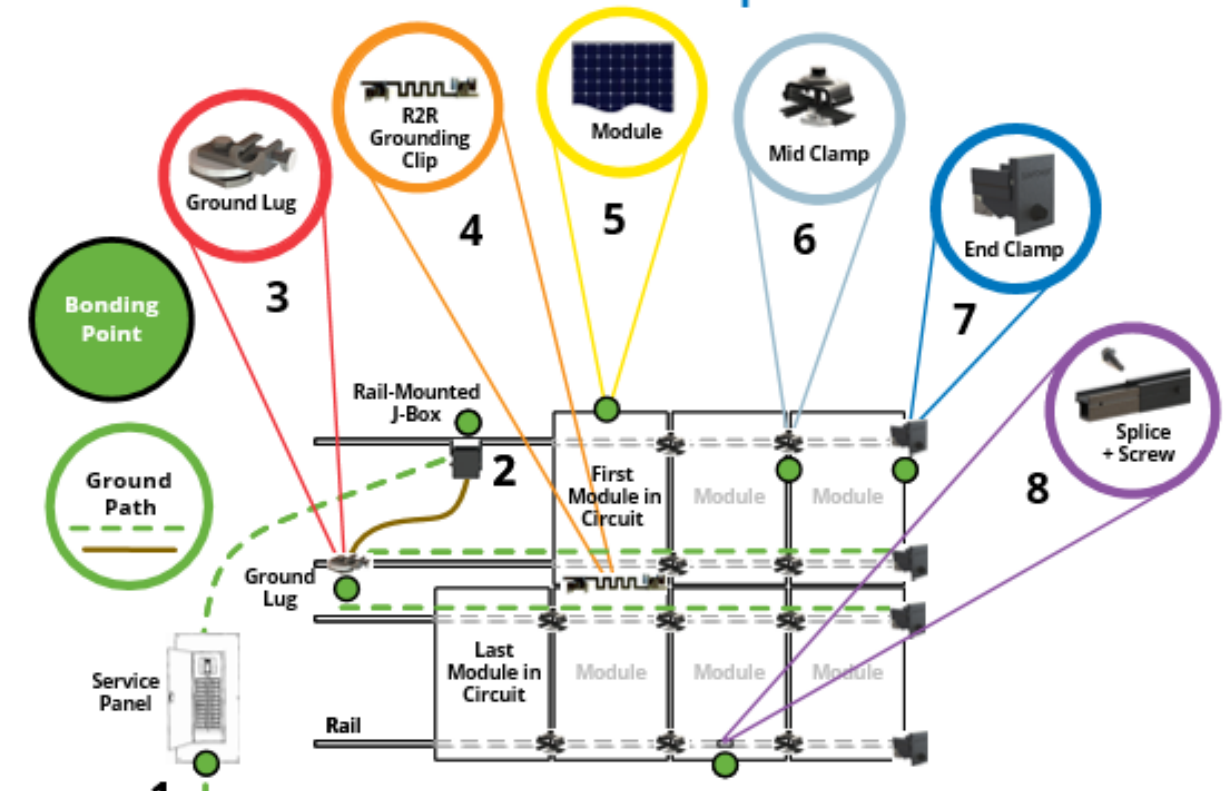

Bonding Components		Compliance	
		NEC	UL
1	Grounding Electrode to Service Panel	690.47(A) 690.47(D)	n/a
2	Service Panel to Ground Wire	690.43(C)	1741
3	Ground Wire to Ground Lug to Rail	690.43(C)	2703
4	Module Frame to Module Frame	690.43(C)	2703
5	Module Frame	n/a	1703
6	Rail to Mid Clamp to Module Frame	690.43(A) 690.43(C) 690.43(D)	2703
7	Module Frame to End Clamp to Rail	690.43(A) 690.43(C) 690.43(D)	2703
8	Rail to Splice	690.43(A) 690.43(C) 690.43(D)	2703