

HTE 04-5-8833R

IMPROVEMENT PERMIT

21266

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No Person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) Robby + Kathy Bendyk New Installation Septic Tank
 Property Location: SR# 1439 Wheeler Dr Repairs Nitrification Line

Subdivision Acilla Creek Farms Lot # 3

Tax ID # _____ Quadrant # _____

Number of Bedrooms Proposed: 5 Lot Size: 5.93 Ac

Basement with Plumbing: Garage:

Water Supply: Well Public Community

Distance From Well: 50 ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other Pump to 25% reduction w/ Mawitee Distribution

Size of tank: Septic Tank: 1250 gallons Pump Tank: 1250 gallons

Subsurface Drainage Field No. of ditches 3 exact length of each ditch 125 ft. width of ditches 3 ft. depth of ditches 18 in.


French Drain Required: _____ Linear feet

Date: 6/6/2004

Signed: Doug McSwain S.
 Environmental Health Specialist

This permit is subject to revocation if site plans or intended use change.

- * Maintain all setbacks
- * Round ditches on contour
- * Supply Line approx. 75' 2" sch 40
- * Use 1/2" sch 40 tees
- * Pump 23 gpm @ 12' TDH
- * Dose 142 gal
- * Draw Down 6.5 inches
- * Contractor to meet onsite for drain field location + any questions

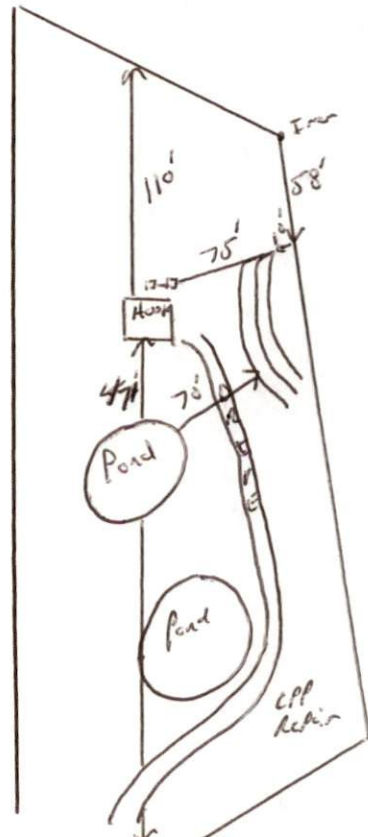

* Not to scale

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH
AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 21266. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. *This authorization will be invalid if ownership, site plans, or intended use change.*

Name Robly + Kathy Berezdyk Telephone # 919-846-9698

Address 6857 Cool Pond Rd. Raleigh, N.C. 27613

Property Location SR# 1439 Road Name Wheeler

Subdivision McMillan Creek Farm Lot # 3 # Bedrooms Proposed 5 Lot Size 5.8 Ac

TYPE OF SYSTEM

- New Installation Repair Septic Tank Nitrification Lines
- Conventional Other Pumps to 25% Reduction w/ Man tee Distribution
- Basement With Plumbing Without Plumbing

Water Supply: Well Public Water Supply Minimum Well Setback: 50 Ft.

Septic Tank 1250 gal Pump Chamber 1250 gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 1 # of lines per field 3 Length of lines 125 Ft.

Width of ditches 3 ft. Depth of ditches 18 inches

French Drain: Linear feet required _____ Depth of gravel _____

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

Signature of Authorized Agent for Harnett County [Signature] Date 2/16/2004