177

SNAPNRACK
UR 60 SPLICE
E359313
Powered by Enphase
System
LISTED

ENPHASE
IQ8+
Grid Support Utility Interactive Inverter
Multimode Inverter
Off-grid Power Factor: -1 to 0 to +1
Grid-tied Power Factor: +/- 0.85
DC input range: 25-58 V
Max. input short-circuit current: 15 A
Max. input continuous current: 10.6 A
AC output voltages: 240 V
AC output currents: 1.21 A
AC output frequency: 60 Hz
AC output power (max. continuous): 290 VA
Operating temperature: -40 °C to +60 °C
Ingress protection: NEMA Type 6
Photovoltaic Rapid Shutdown Equipment
NEC 690.12 and C22.1-2015 Rule 64-218
UL1741 SA Compliant | Assembled in India
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation.
CERTIFIED
SAFETY US-CA
E341165
CAUTION: RISK OF SHOCK. WARRANTY VOID IF COVER REMOVED. NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.
WARNING: ELECTRIC SHOCK HAZARD. DC CONDUCTORS OF THIS PHOTOVOLTAIC SYSTEM ARE UNGROUNDED AND MAY BE ENERGIZED. AC AND DC VOLTAGE SOURCES TERMINATE INSIDE THIS EQUIPMENT. DISCONNECT BOTH BEFORE SERVICING. PHOTOVOLTAIC ARRAY SUPPLIES A DC VOLTAGE TO THIS EQUIPMENT WHEN EXPOSED TO LIGHT. HOT SURFACES: TO REDUCE THE RISK OF BURNS - DO NOT TOUCH.
ATTENTION: RISQUE D'ELECTROCUTION. LES CONDUCTEURS CC DE CE SYSTEME PHOTOVOLTAIQUE NE SONT PAS RELIES A LA TERRE ET PEUVENT ETRE SOUS TENSION. DES SOURCES DE TENSION CA ET CC SONT CONNECTEES A CET APPAREIL. ISOLER LES DEUX SOURCES AVANT TOUTE INTERVENTION. LES CABLES COURANT CONTINU SONT SOUS TENSION LORSQUE LE CHAMP PHOTOVOLTAIQUE EST EXPOSE A LA LUMIERE. RISQUE DE BRULURE, NE PAS TOUCHER.

482247123949 885 – 01384
IQ8PLUS-72-M-US
885-01384 02 7972
482247123949

482247123949 885 – 01384
IQ8PLUS-72-M-US
885-01384 02 7972
482247123949

KLEIN TOOLS
935DAGL
33.5°
90° 180°
SAVE
ALARM
Digital Angle Gauge

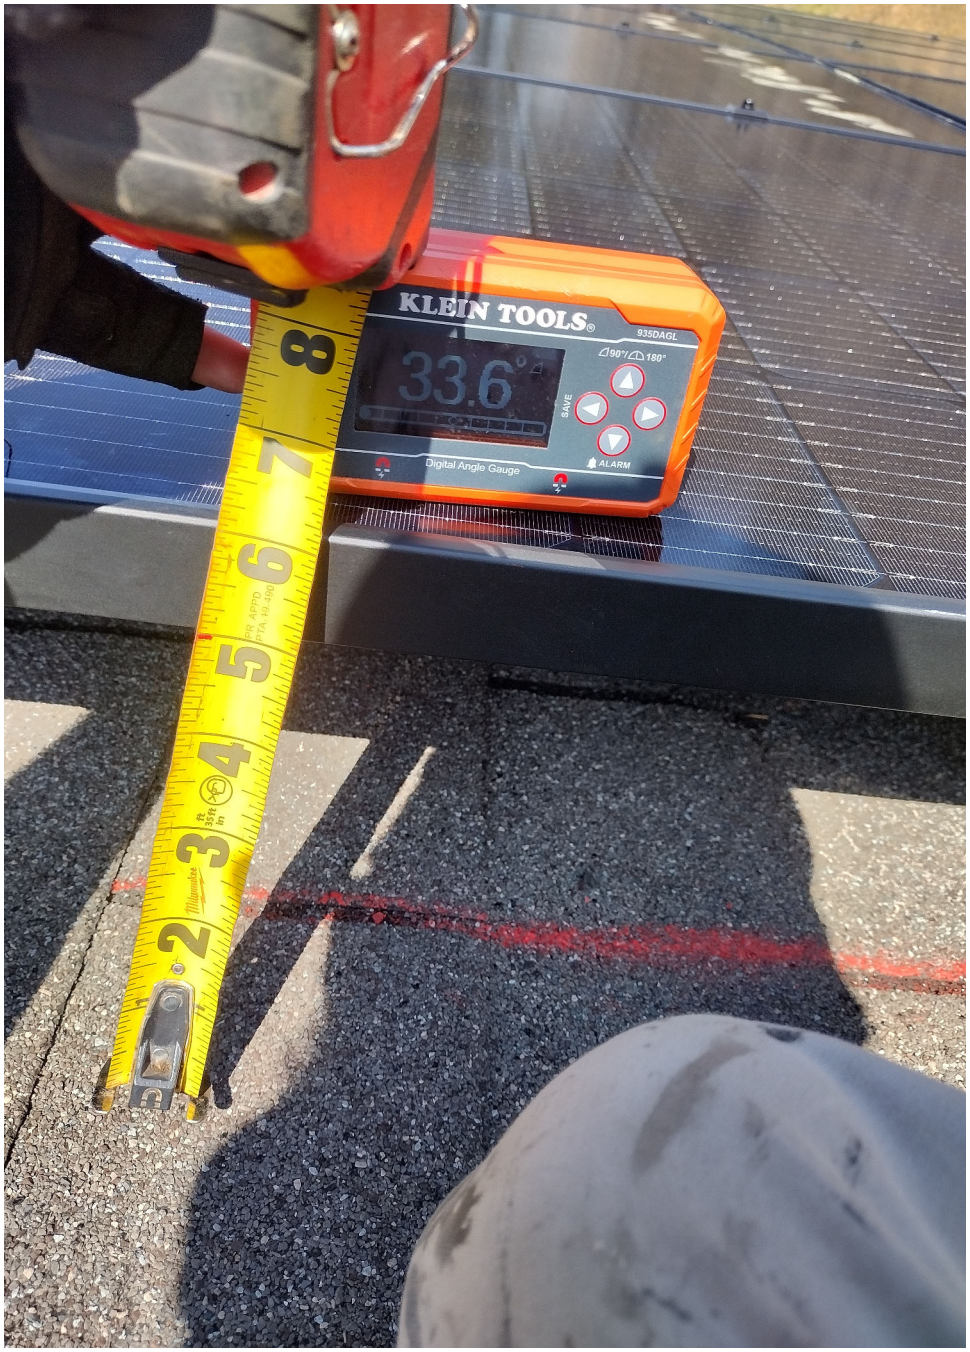
KLEIN TOOLS
935DAGL
33.6°
90° 180°
SAVE
ALARM
Digital Angle Gauge

snapNrack
Solar Mounting Solutions

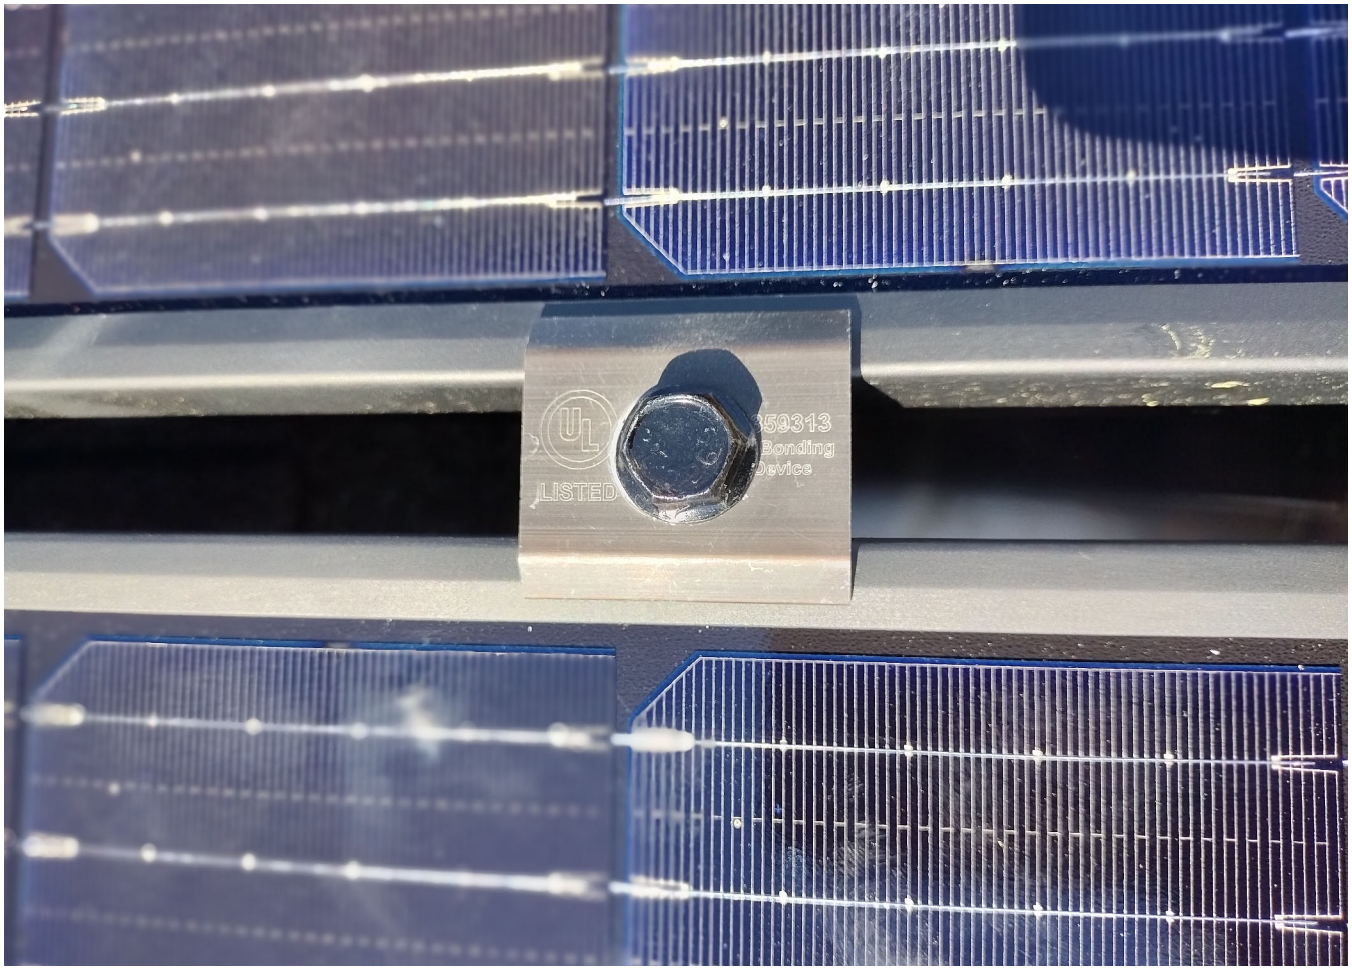
UL
LISTED
359313
Bonding
Device

10 11 12 13 14 15 16 17 18 19 20