

HTE 04-5-10031

OPERATIONS PERMIT

Name: (owner) Brookstone Homes INC
Property Location: SR# 2005 Brookmill RD
Subdivision Cottleston Estates
Tax ID # _____

New Installation Septic Tank
 Repairs Nitrification Line
Lot # 33
Quadrant # _____
Registration # 226

Contractor: HBM Septic Service

Basement with Plumbing: Garage:
Water Supply: Well Public Community

Distance From Well: 50 ft.

Following are the specifications for the sewage disposal system on above captioned property.

Type of system: Conventional Other 25% Reduction System

Size of tank: Septic Tank: 1000 gallons Pump Tank: _____ gallons


Subsurface Drainage Field No. of ditches 4 exact length of each ditch 100 ft. width of ditches 3 ft. depth of ditches 20-18 in.

French Drain Required: - Linear feet

Date: 11-1-04

Inspected by: James E. Moulton
Environmental Health Specialist

PERMIT NO. 20966

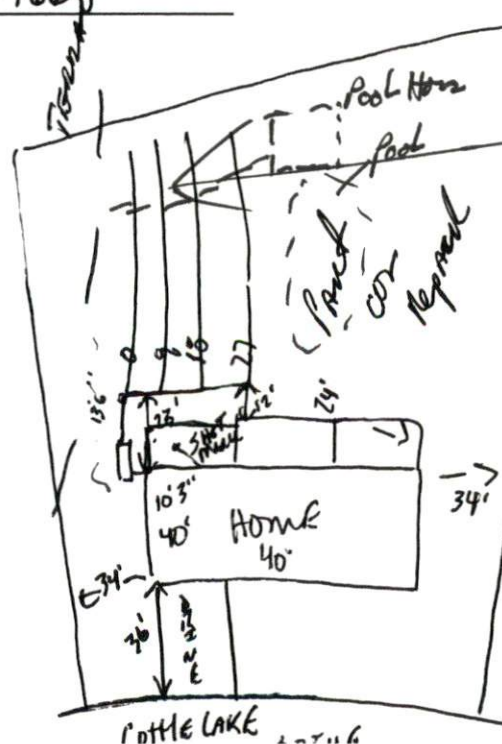

Lines cut by Trencher.
- Repaired by inserting 3" solid PVC into cut section @ 1 FT each way. Covered with paper + Tamped Trench
By Carter Brothers (B.C. Carter)
07/26/06