

HTE 04-50010701

OPERATIONS PERMIT

Name: (owner) SEARS, DAVID & KELLY New Installation Septic Tank
 Property Location: SR# 1108 CAMERON HILL RD Repairs Nitrification Line
 Subdivision SEARS Lot # 2
 Tax ID # _____ Quadrant # _____
 Contractor: BILL HART Registration # _____

Basement with Plumbing: Garage:

Water Supply: Well Public Community

Distance From Well: 100 ft.

Following are the specifications for the sewage disposal system on above captioned property.

Type of system: Conventional Other PUMP TO CHAMBER (QUICK 4)

Size of tank: Septic Tank: 1000 gallons Pump Tank: 1000 gallons



Subsurface Drainage Field No. of ditches 3 exact length of each ditch 80 ft. width of ditches 3 ft. depth of ditches 24 in.

French Drain Required: _____ Linear feet

Date: 2/28/05

Inspected by: [Signature] Environmental Health Specialist

PERMIT NO. 21430

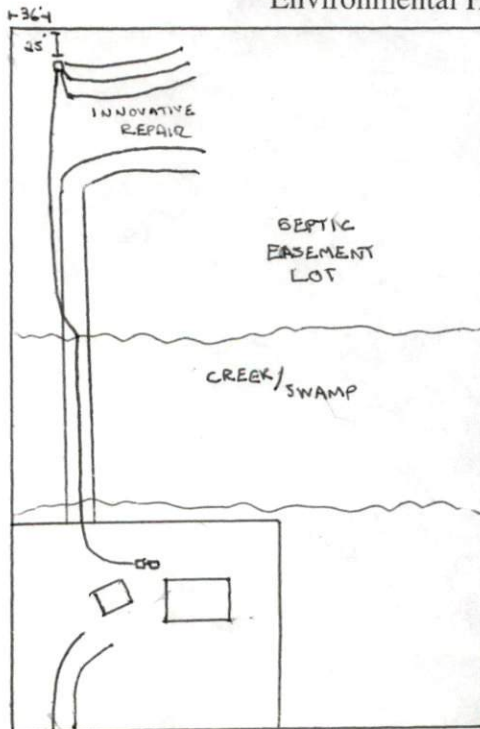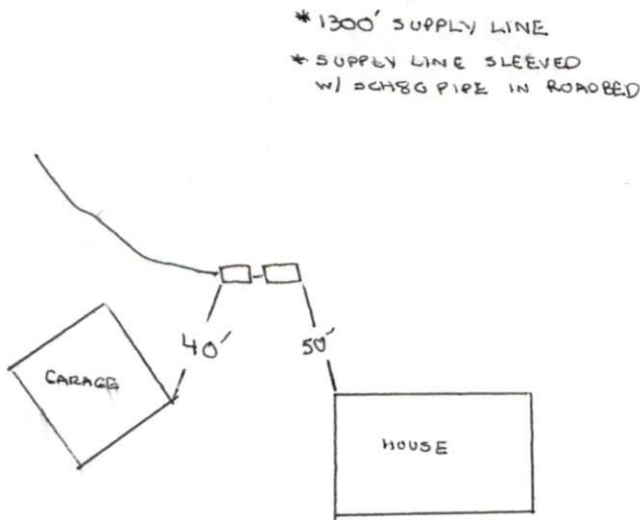

SR 1108