

HTE 05-5-11478

IMPROVEMENT PERMIT

21722

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No Person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) Showcase Construction New Installation Septic Tank
Property Location: SR# 1124 Rameaux Rd Repairs Nitrification Line

Subdivision Westerfield Farms Lot # 16

Tax ID # _____ Quadrant # _____

Number of Bedrooms Proposed: 3 Lot Size: .43 Ac

Basement with Plumbing: Garage:

Water Supply: Well Public Community

Distance From Well: 50 min ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other Pump to 25' reduction w/ man tee distribution

Size of tank: Septic Tank: 1000 gallons Pump Tank: 1000 gallons

Subsurface Drainage Field No. of ditches 4 exact length of each ditch 80 ft. width of ditches 3 ft. depth of ditches 18 in.


French Drain Required: _____ Linear feet

Date: 3/23/2005

This permit is subject to revocation if site plans or intended use change.

Signed: Dave McSwain
Environmental Health Specialist

- * Maintain all setbacks
- * Stepdowns may be used
- * Use 2" sch 40 for supply line & man. flood (approx 25'-30')
- * Use 4 1/2" sch 40 tees
- * T.O.H. 10'
- * pump to be used 35 gpm @ 10' T.O.H.
- * Draw down 6"

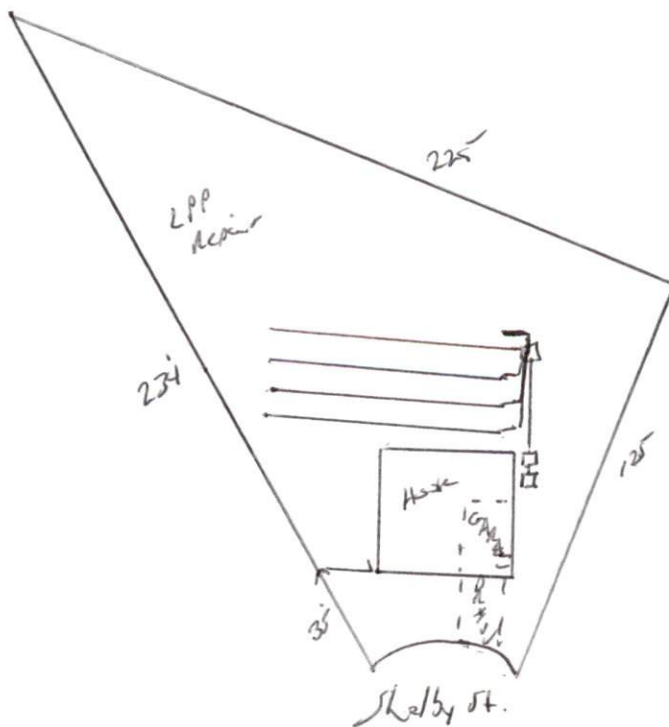

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH
AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 21722. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. *This authorization will be invalid if ownership, site plans, or intended use change.*

Showcase Construction

864-0900

Name

Telephone #

5506 Yeakins Rd. Fayetteville, N.C. 28703

Address

1124

Runkent

Property Location SR#

Road Name

Westerfield Farm

16

3

.43 Ac

Subdivision

Lot #

Bedrooms Proposed

Lot Size

TYPE OF SYSTEM

New Installation Repair Septic Tank Nitrification Lines

Conventional Other Pump to 25% Reducer w/ Manhole Distribution

Basement With Plumbing Without Plumbing

Water Supply: Well Public Water Supply Minimum Well Setback: 50 Ft.

Septic Tank 1000 gal Pump Chamber 1000 gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 1 # of lines per field 4 Length of lines 80 Ft.

Width of ditches 3 ft. Depth of ditches 18 inches

French Drain: Linear feet required _____ Depth of gravel _____

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

Brian McFarland

Signature of Authorized Agent for Harnett County

3/23/2005

Date