

HTE 05-5-11764

IMPROVEMENT PERMIT

21737

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No Person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) Mike Day New Installation Septic Tank
 Property Location: SR# 1291 Old 5421 Repairs Nitrification Line

Subdivision Manic Bell Ridge Lot # 19

Tax ID # _____ Quadrant # _____

Number of Bedrooms Proposed: 3 Lot Size: .64 Ac

Basement with Plumbing: Garage:

Water Supply: Well Public Community

Distance From Well: 50 min ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other 25% reduction system

Size of tank: Septic Tank: 1000 gallons Pump Tank: _____ gallons

Subsurface Drainage Field No. of ditches 3 exact length of each ditch 80 ft. width of ditches 3 ft. depth of ditches 8-22 in.


French Drain Required: _____ Linear feet

Date: 4/11/2005

This permit is subject to revocation if site plans or intended use change.

Signed: Greg McJannet, S.
 Environmental Health Specialist

- * Maintain all setbacks
- * Run ditches on contour
- * Ditches should not extend into the woods
- * Tank may need to be set shallow to achieve fall & maintain ditch depths

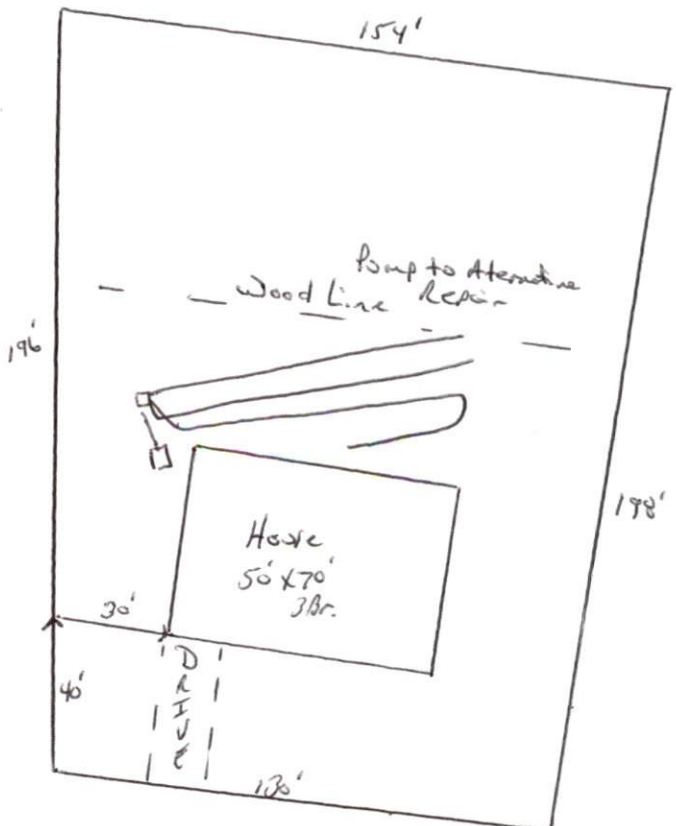

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH
AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 21737. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. *This authorization will be invalid if ownership, site plans, or intended use change.*

Name Mike Ray Telephone # 499 8382

Address 3417 Spring Hill Ch. Rd. Lillington N.C. 27546

Property Location SR# 1291 Road Name Old W 421

Subdivision Manic Bell Ridge Lot # 19 # Bedrooms Proposed 3 Lot Size .64Ac

TYPE OF SYSTEM

New Installation Repair Septic Tank Nitrification Lines

Conventional Other 25% reduction system

Basement With Plumbing Without Plumbing

Water Supply: Well Public Water Supply Minimum Well Setback: 50 Ft.

Septic Tank 1000 gal Pump Chamber _____ gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 1 # of lines per field 3 Length of lines 80 Ft.

Width of ditches 3 ft. Depth of ditches 18-22 inches

French Drain: Linear feet required _____ Depth of gravel _____

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

Signature of Authorized Agent for Harnett County

Date 4/11/2015