

HTE 05-5-12001

IMPROVEMENT PERMIT

22153

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No Person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) Comfort Homes Inc New Installation Septic Tank
Property Location: SR# 1412 Christian Light RD Repairs Nitrification Line

Subdivision Forest Trails Lot # 14

Tax ID # _____ Quadrant # _____

Number of Bedrooms Proposed: 3 Lot Size: .461

Basement with Plumbing: Garage:

Water Supply: Well Public Community

Distance From Well: 50' ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other MANETTE Pump to 25% Reduction System

Size of tank: Septic Tank: 1000 gallons Pump Tank: 1000 gallons

Subsurface Drainage Field No. of ditches 4 exact length of each ditch 75' width of ditches 3 ft. depth of ditches 27-18 in.

French Drain Required: - Linear feet

Date: 7-8-05

This permit is subject to revocation if site plans or intended use change.

Signed James E. Manlandor
Environmental Health Specialist

Manette Specs


75' of 2" supply

4-1/2" SCH 40 TAPS

4' of ELEVATION
2' PRESSURE HEAD

Pump Specs

30gpm @ 13.5' TDH

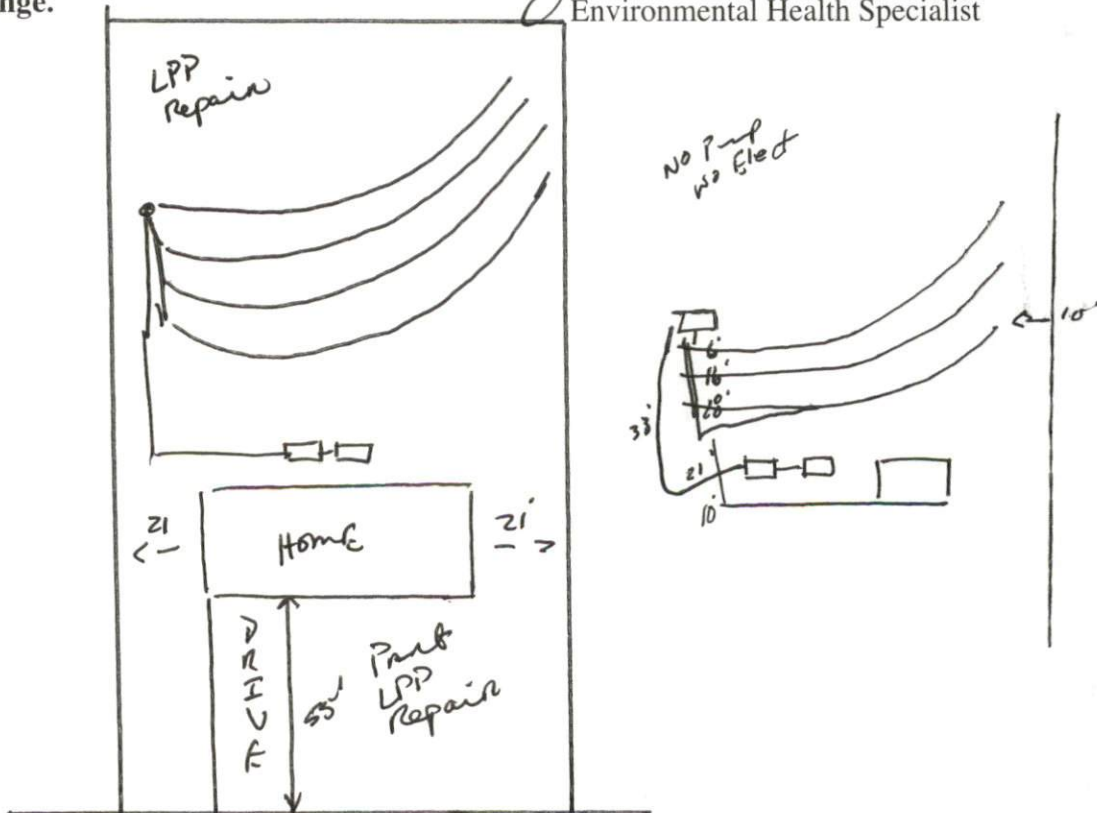

Kingsbrook Circle

05-5-12001

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 22153. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. *This authorization will be invalid if ownership, site plans, or intended use change.*

Name Comfort Homes LLC Telephone # 719-553-3242

Address P.O. Box 369 Clayton N.C. 27528

Property Location SR# 1412 Road Name Christian Light

Subdivision Forest Trails Lot # 14 # Bedrooms Proposed 3 Lot Size 1461

TYPE OF SYSTEM

New Installation Repair Septic Tank Nitrification Lines

Conventional Other Manhole to 25% reduction system

Basement With Plumbing Without Plumbing

Water Supply: Well Public Water Supply Minimum Well Setback: _____ Ft.

Septic Tank 1000 gal Pump Chamber 1000 gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 2 # of lines per field 4 Length of lines 75 Ft.

Width of ditches 3 ft. Depth of ditches 22 -> 18 inches

French Drain: Linear feet required - Depth of gravel -

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

James E. Mankant
Signature of Authorized Agent for Harnett County

7-12-05
Date