EQUIPMENT GROUNDING TERM
Terminal
Wire binding screw
Wire Range
AWG CU/AL
Slotted
Hex

LUGS

SOLAR PV SYSTEM EQUIPPED WITH RAPID SHUTDOWN
TURN RAPID SHUTDOWN SWITCH TO THE "OFF" POSITION TO SHUT DOWN PV SYSTEM AND REDUCE SHOCK HAZARD IN THE ARRAY
WARNING
ELECTRIC SHOCK HAZARD
TERMINALS ON THE LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITION
PHOTOVOLTAIC SYSTEM AC DISCONNECT
WARNING
DUAL POWER SUPPLY
SOURCES: UTILITY GRID AND PV SOLAR ELECTRIC SYSTEM
WARNING
WARNING

GENERAL DUTY
SAFETY SWITCH
INTERRUPTOR DE
SEGURIDAD DE
SERVICIO GENERAL
30 A
240 Vac / V~
OTOVOLTAIC SYSTEM
AC DISCONNECT
GER / PELIGRO
RATED AC OUTPUT CURRENT A
AL OPERATING AC VOLTAGE V
RAPID SHUTDOWN
SWITCH FOR
SOLAR PV SYSTEM
WARNING
POWER TO THIS BUILDING IS ALSO
SUPPLIED FROM MAIN DISTRIBUTION
UTILITY DISCONNECT LOCATED
GARAGE MSP
WARNING
ELECTRIC SHOCK HAZARD
TERMINALS ON THE LINE AND
LOAD SIDES MAY BE ENERGIZED
IN THE OPEN POSITION
ON
OFF

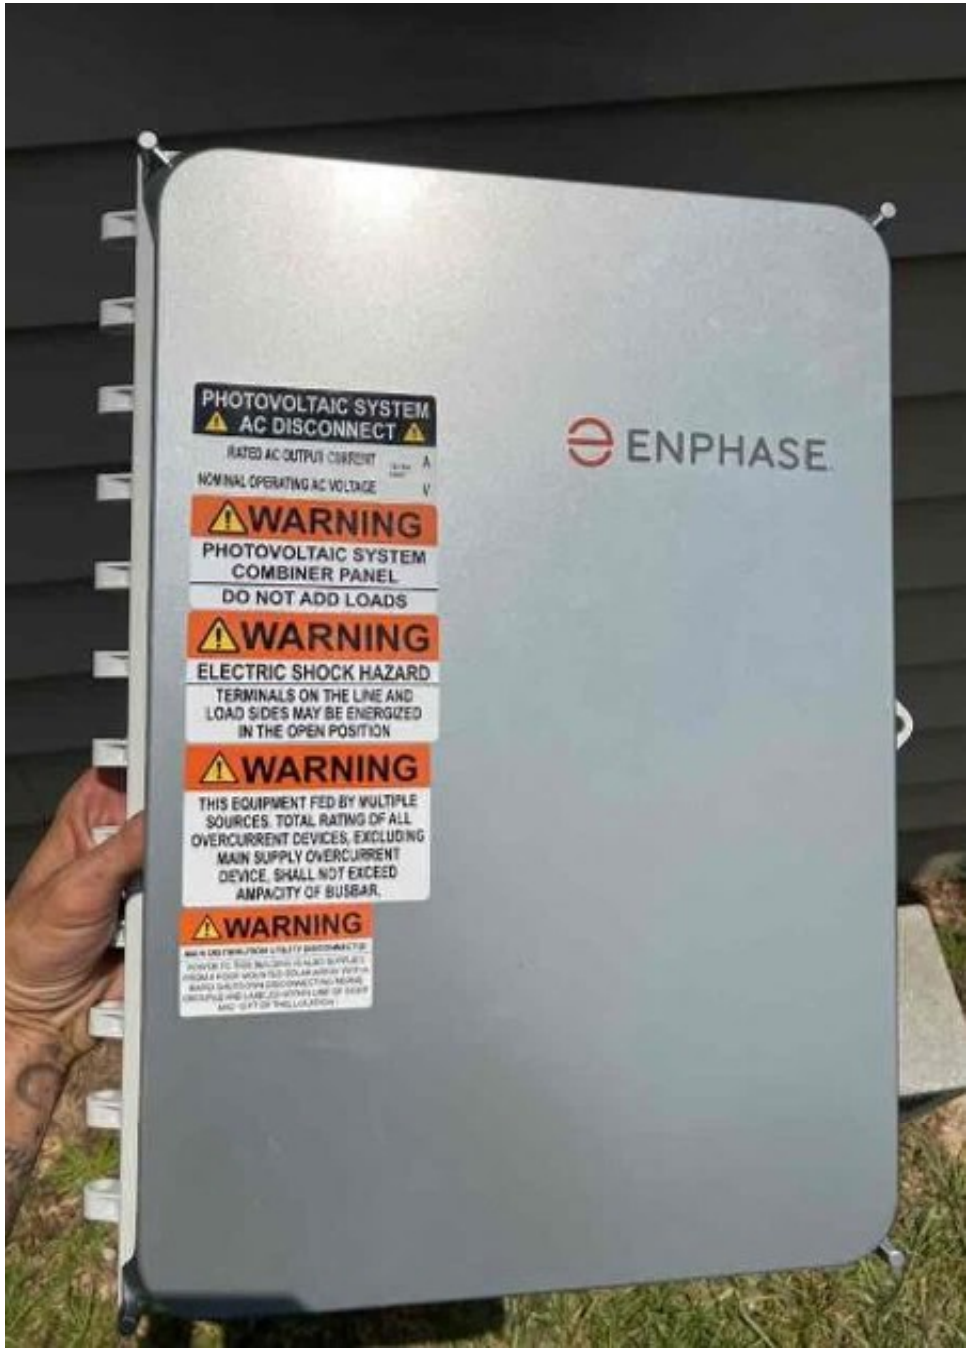
PHOTOVOLTAIC SYSTEM
AC DISCONNECT
RATED AC OUTPUT CURRENT A
NOMINAL OPERATING AC VOLTAGE V
ENPHASE
WARNING
PHOTOVOLTAIC SYSTEM
COMBINER PANEL
DO NOT ADD LOADS
WARNING
ELECTRIC SHOCK HAZARD
TERMINALS ON THE LINE AND
LOAD SIDES MAY BE ENERGIZED
IN THE OPEN POSITION
WARNING
THIS EQUIPMENT FED BY MULTIPLE
SOURCES. TOTAL RATING OF ALL
OVERCURRENT DEVICES, EXCLUDING
MAIN SUPPLY OVERCURRENT
DEVICE, SHALL NOT EXCEED
AMPACITY OF BUSBAR.
WARNING

Janice McCoy
575 New Castle
Un. Spring
Lake
Elec: Mitchell
Nguyen

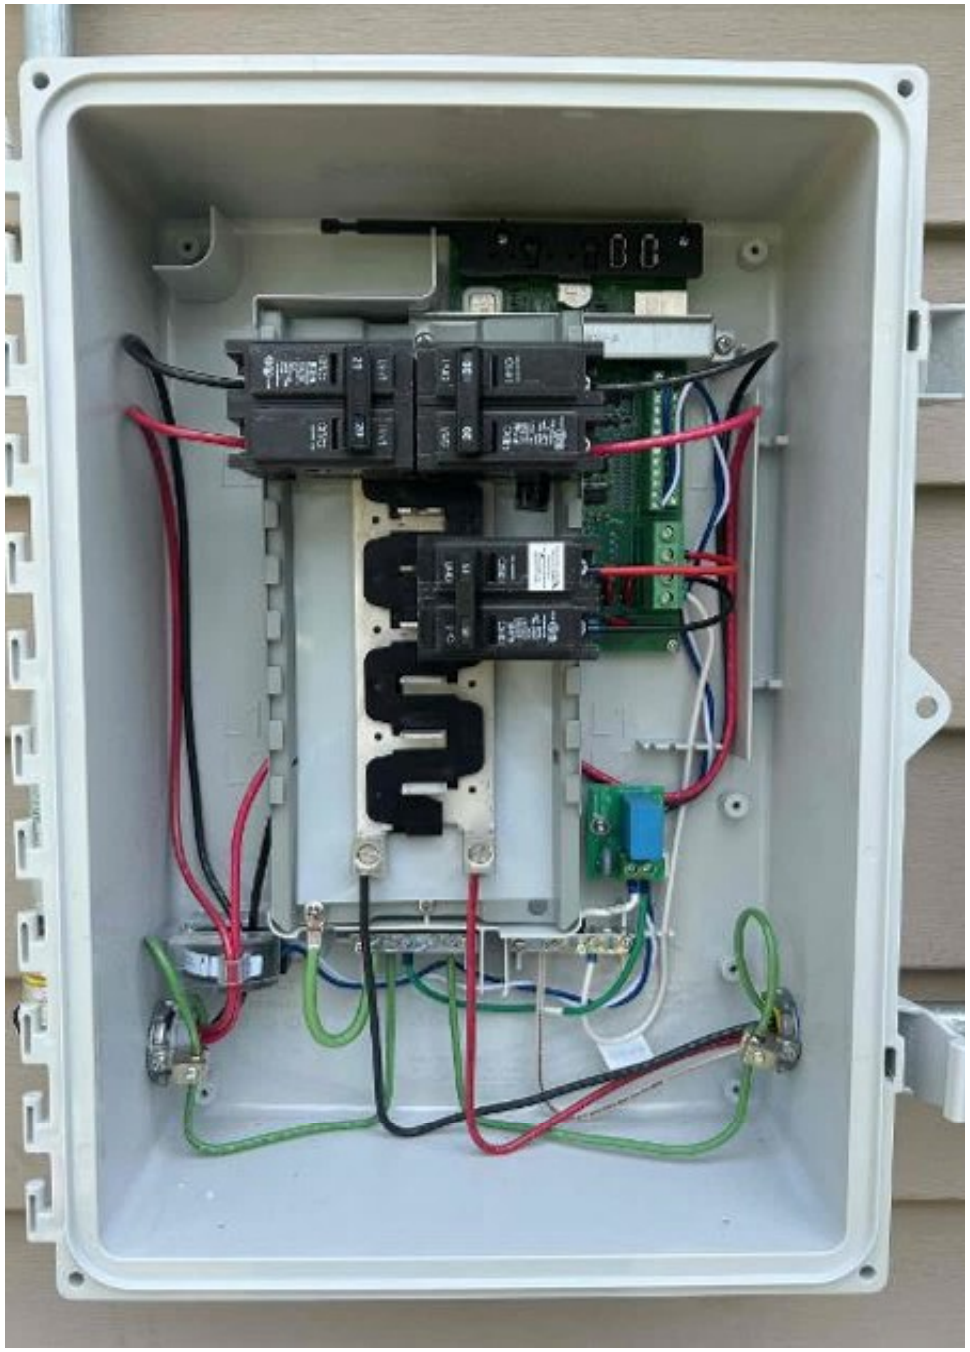

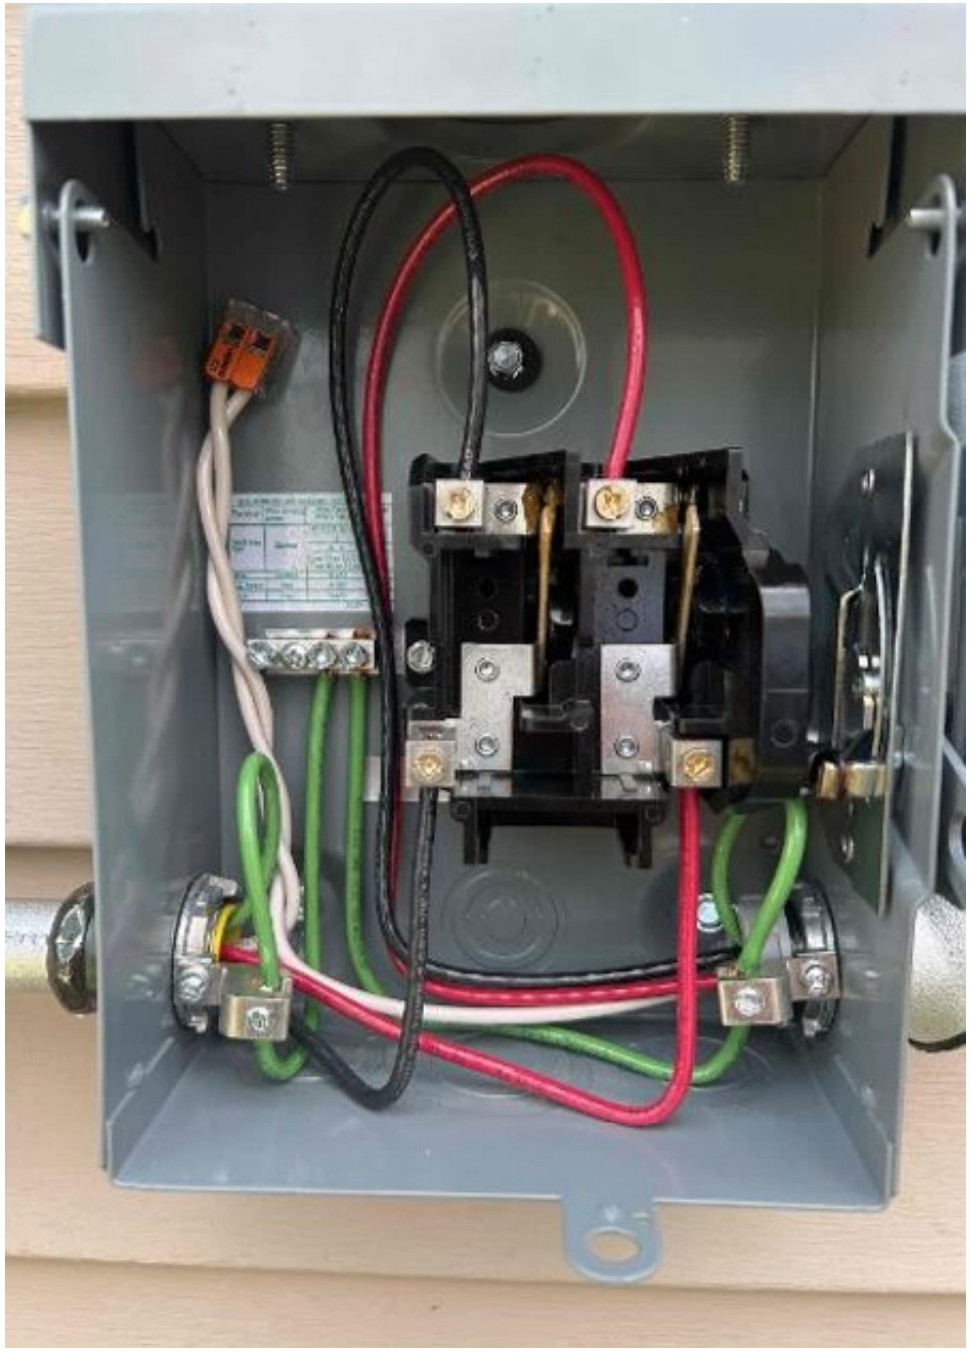

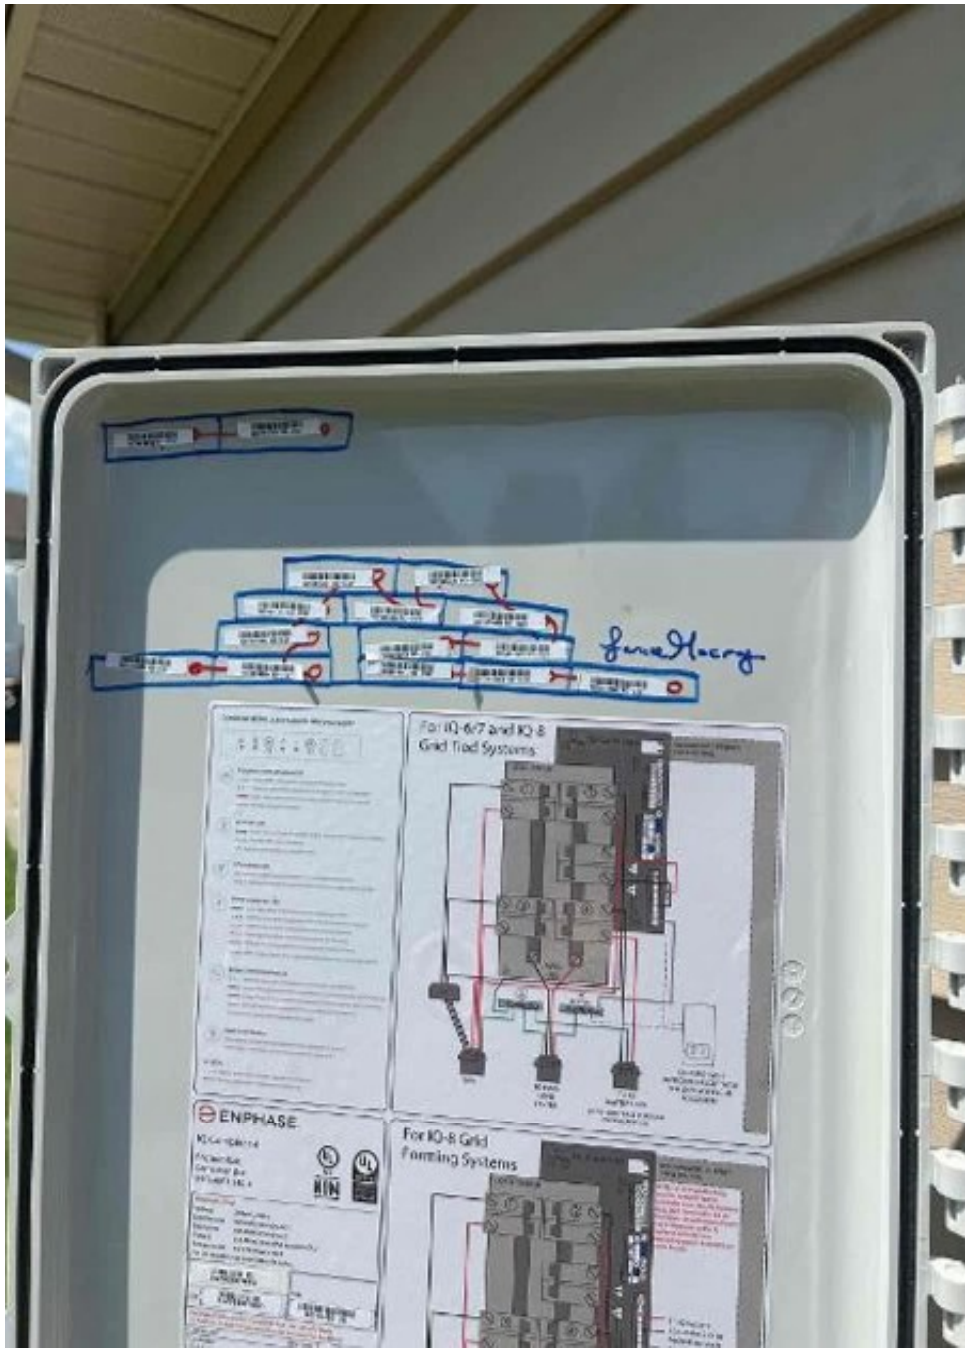
For IQ-6/7 and IQ-8
Grid Tied Systems
ENPHASE
For IQ-8 Grid
Forming Systems

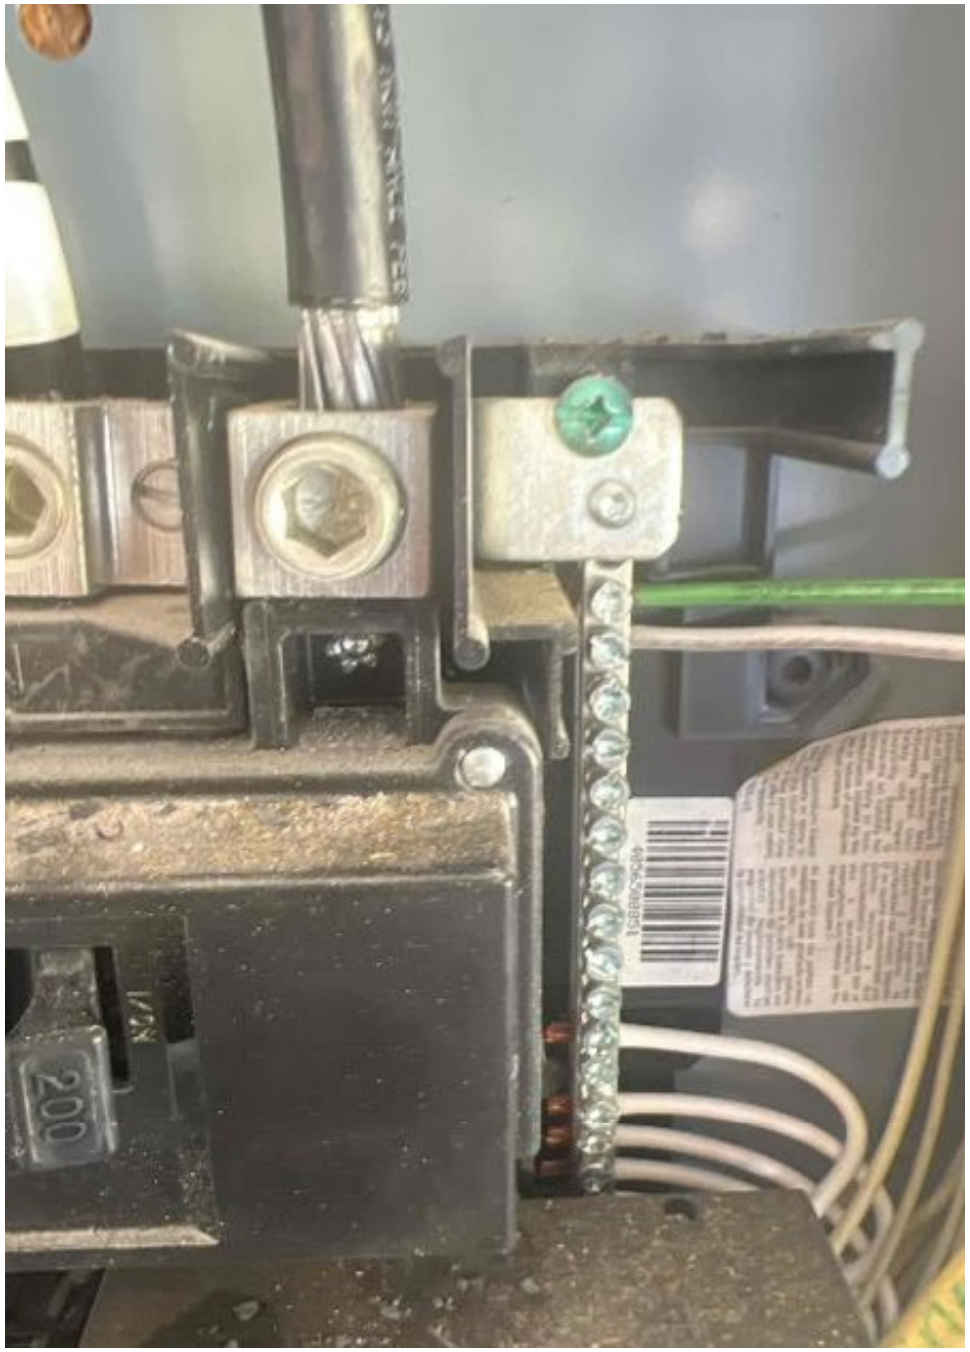
200

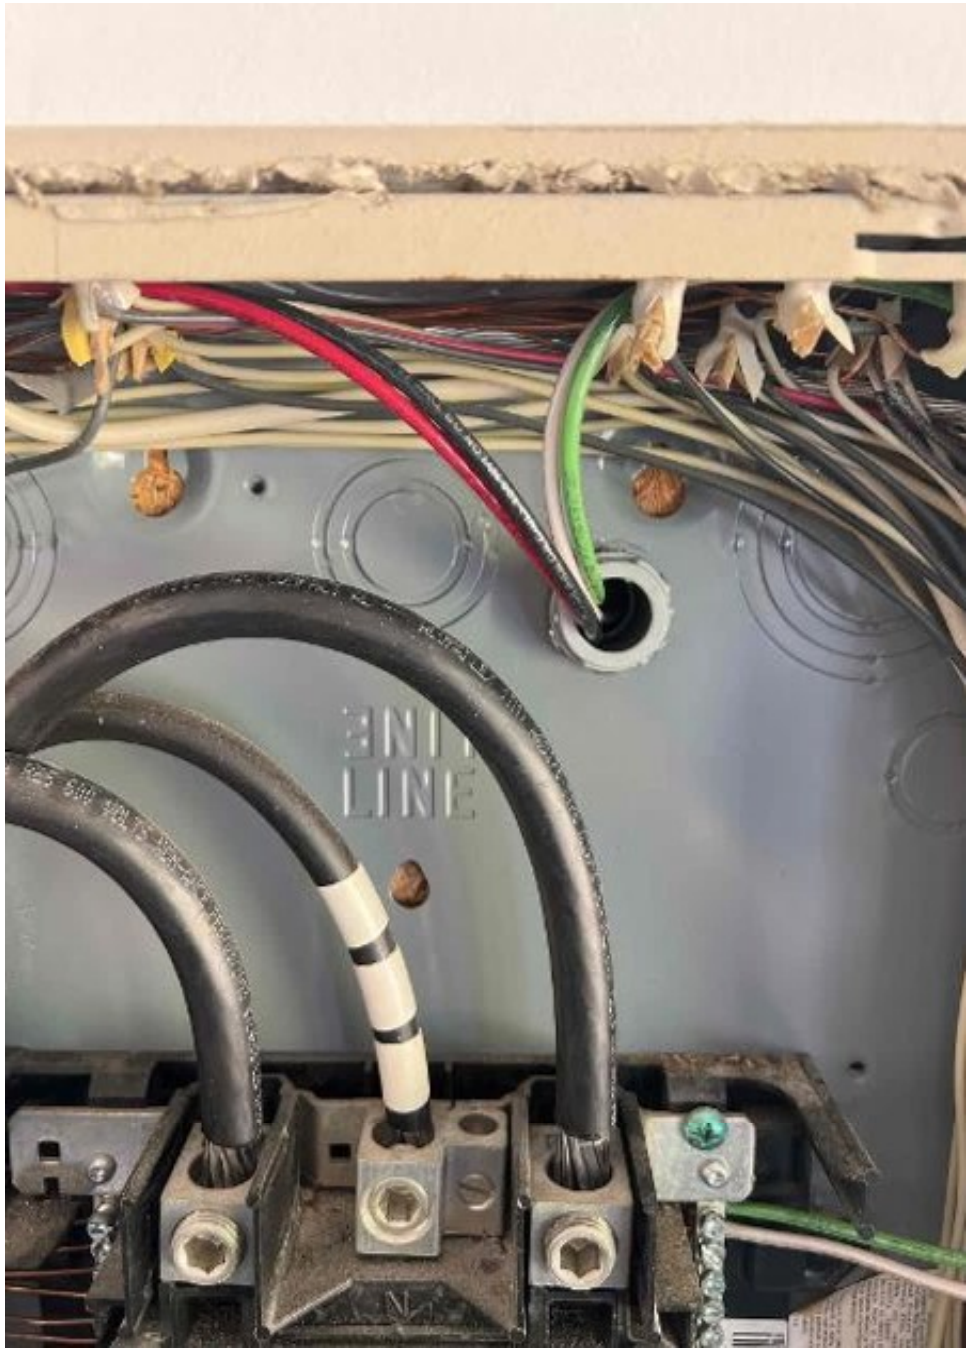
LINE

UNIRAC
BETTER SOLAR STARTS HERE
253010U
SFM SPLICE 6.5"
Pack Size: 10
WO/PO# :0045419-01
Factory Code : 010A

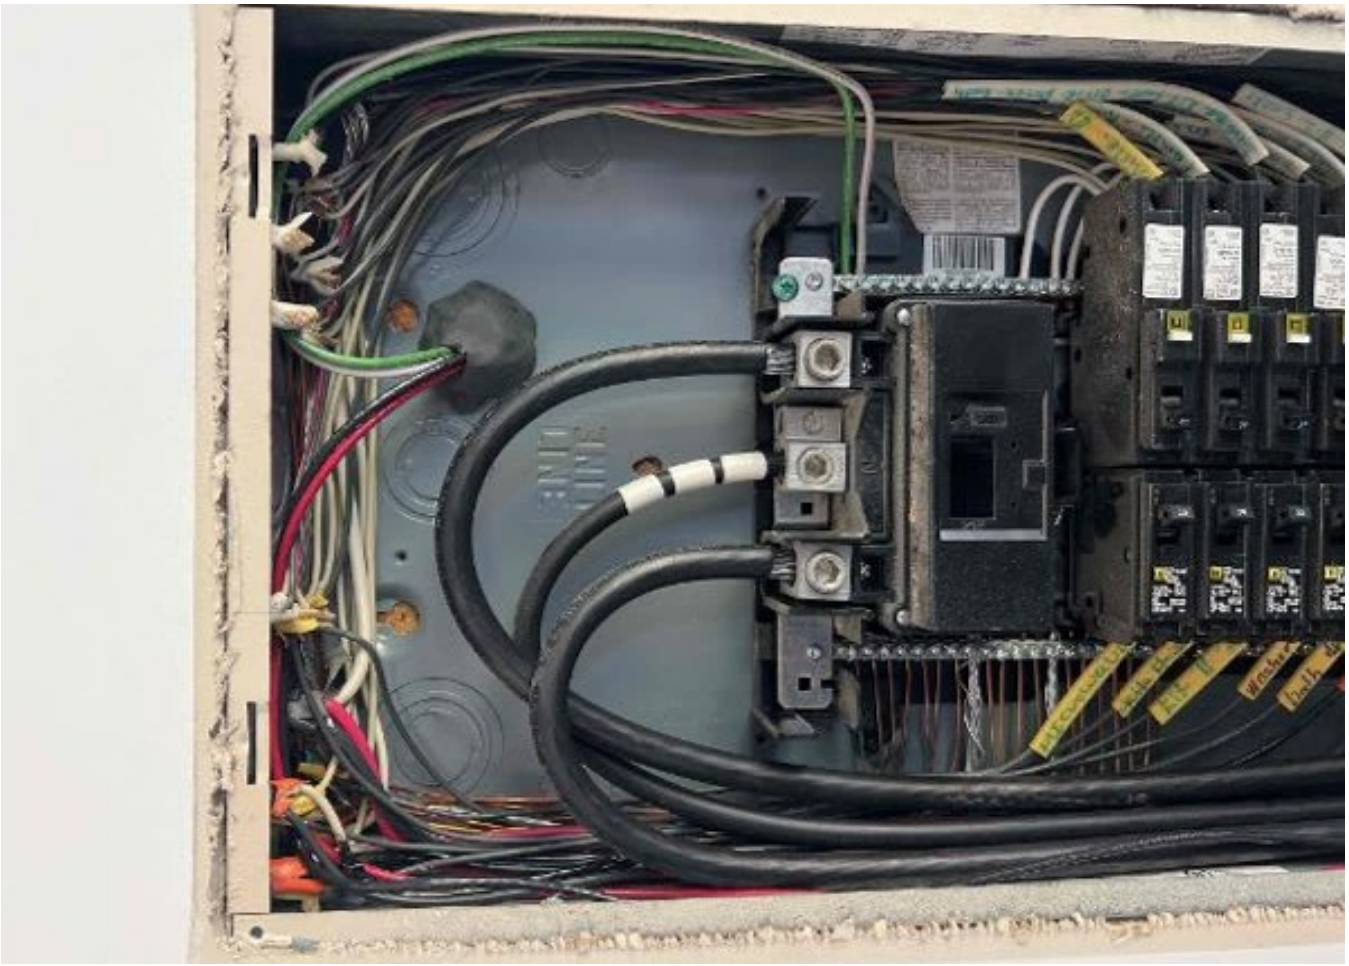

Janice McCrary
515 New Castle
Ln. Spring
Lake
Elec: Mitchell
Nguyen

UNIRAC
BETTER SOLAR STARTS HERE
www.unirac.com
253030U
SFM ATTACHED SPLICE 8"
Pack Size: 10
WO/PO# : 0043974-00
Manufacture date: APR 2021
Factory Code : 010A
810039363386
2 INCH MINIMUM MODULE ENGAGEMENT

ILSCO
connections matter
SGB-4
QTY
50
LAY-IN GROUND LUG
STAINLESS STEEL SCREWS
WIRE RANGE: 4 - 14
1/4" MAX FRAME THICKNESS
ILSCO SOLARB
PATENT NO. D745,846,S
LISTED
WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
Assembled in Mexico
08/20/21
Panel Ground

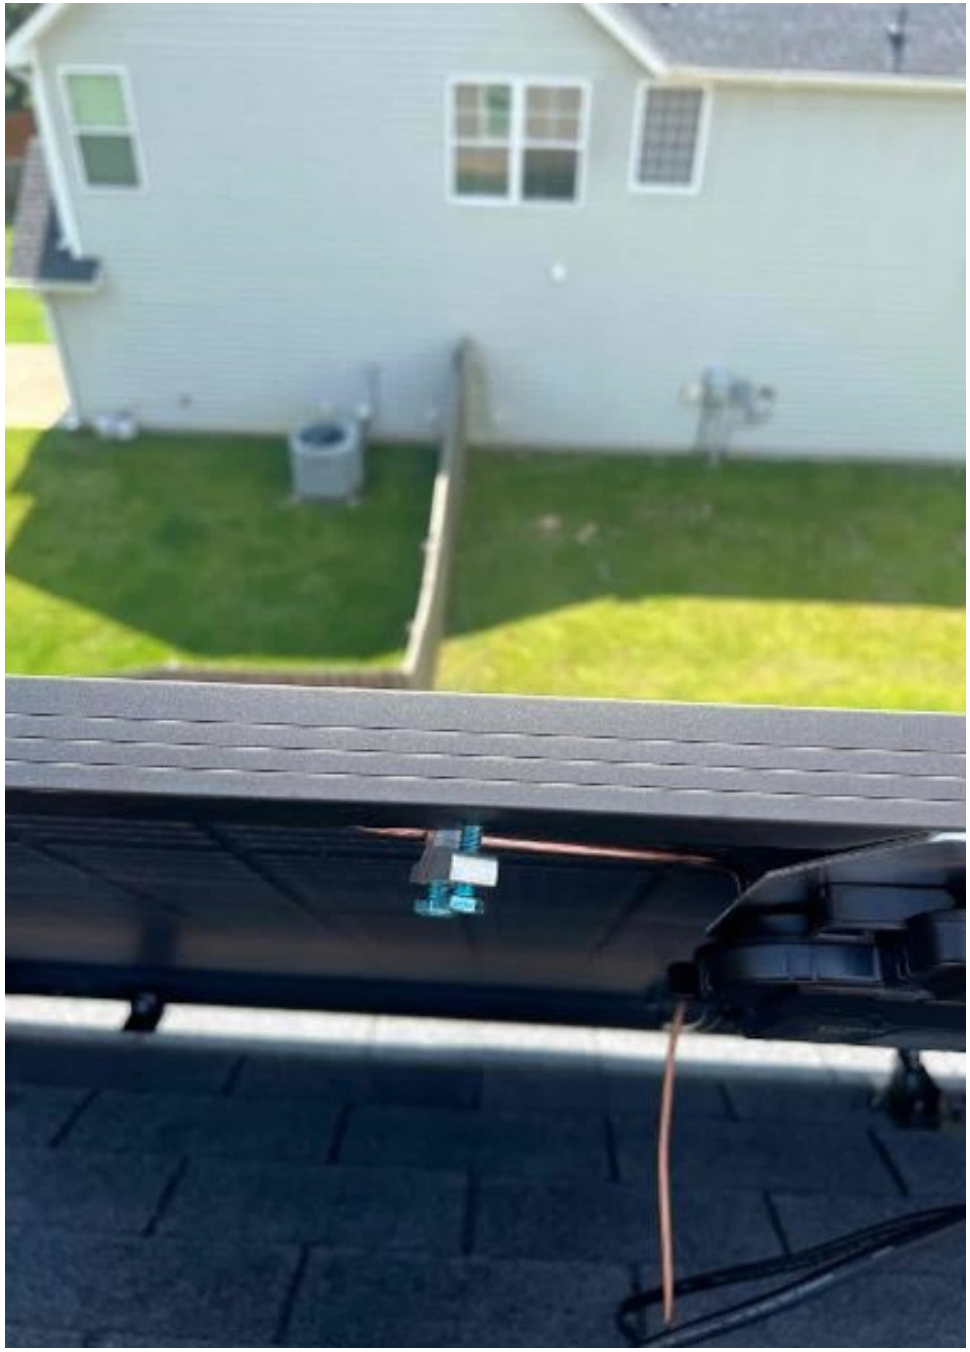

ENPHASE
IQ8+
WARNING:
ATTENTION:

SEG
SOLAR
SEG Solar Inc
Add:973 Isom Road,San Antonio,
TX 78216 USA
www.segsolar.com
System Fire Class Rating: See Installation manual
Made in Thailand
Module Type:
Rated Maximum Power-Front
Power Sorting:
Current at Pmax, Front
Voltage at Pmax, Front
Short-Circuit Current, Front
Open-Circuit Voltage, Front
Weight
Dimension
Maximum System Voltage
Maximum Series Fuse Rating
Cell Technology
Fire Rating
Power Production Tolerance
Short-circuit Current Tolerance
Open-circuit Voltage Tolerance
All technical data measured at STC
PV Module Classification: Class II
Type 1

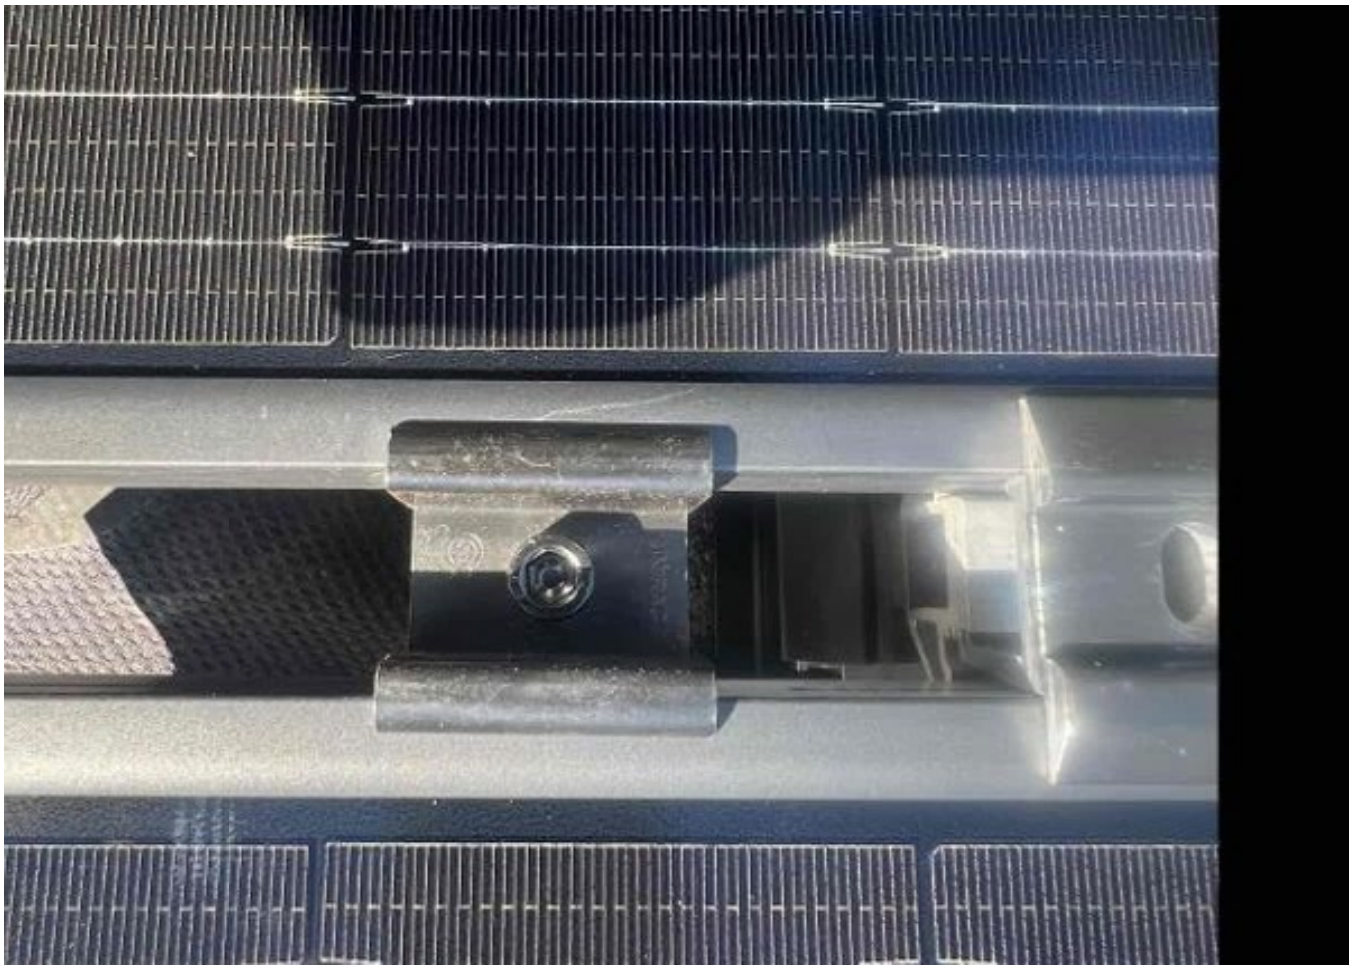

FLASHKIT SFM SLIDER S
004271D
FLASHKIT SFM SLIDER S COMP DRK
DARK Pack Size : 10
Factory Code: S-1

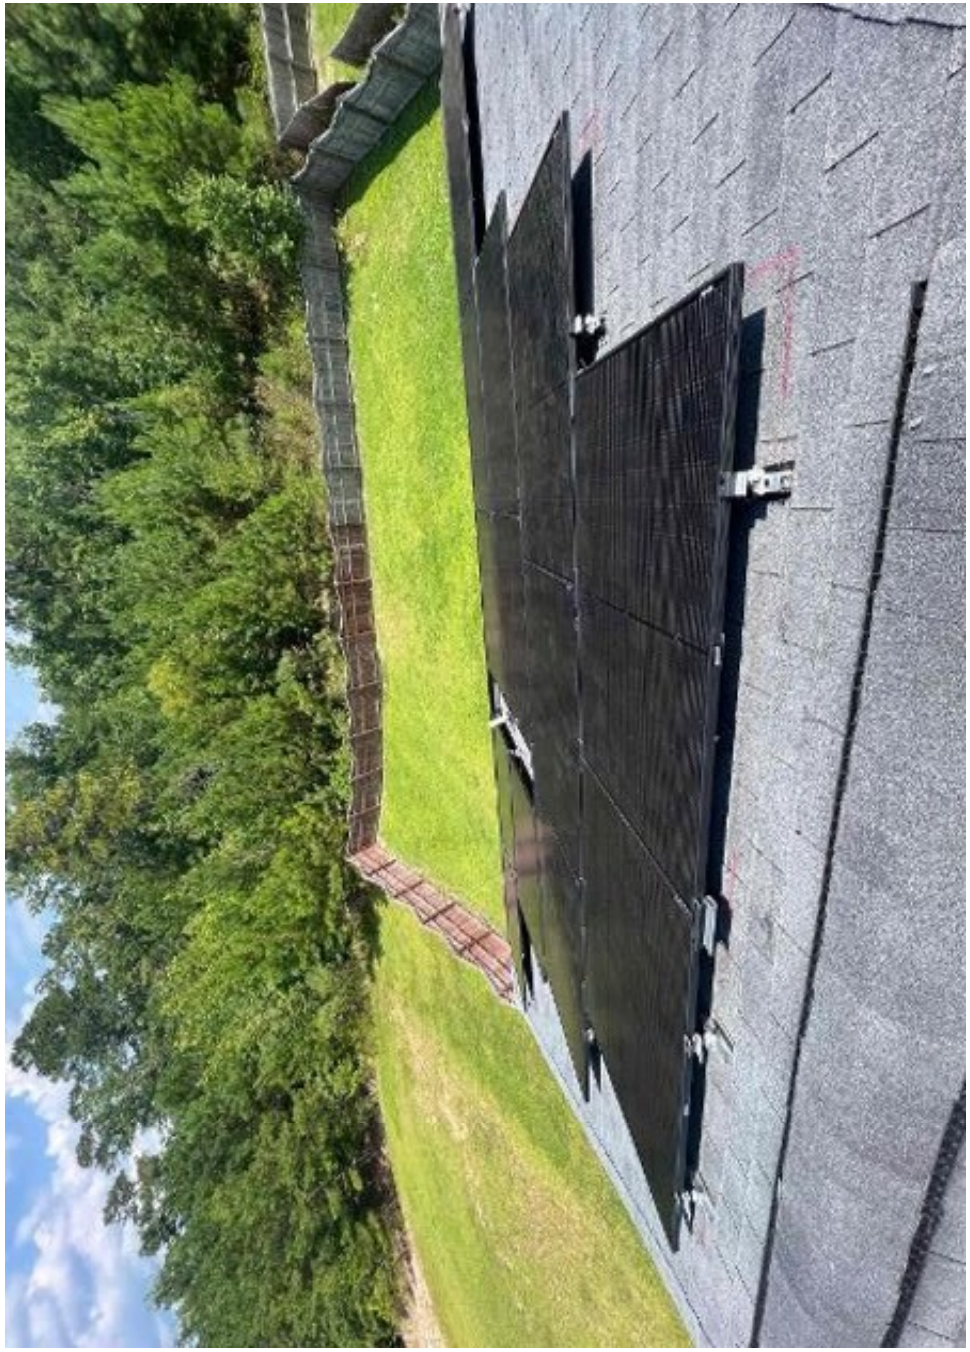

SEG
SOLAR

Janice McCray
515 New Castle
Ln. Spring
Lake
elec: Mitchell
Nguyen

e on the Go
nty claims and have them
hin minutes, plus get answers to
s instantly using live chat onlin
er having to pick up a phone.
om/tools

ADT

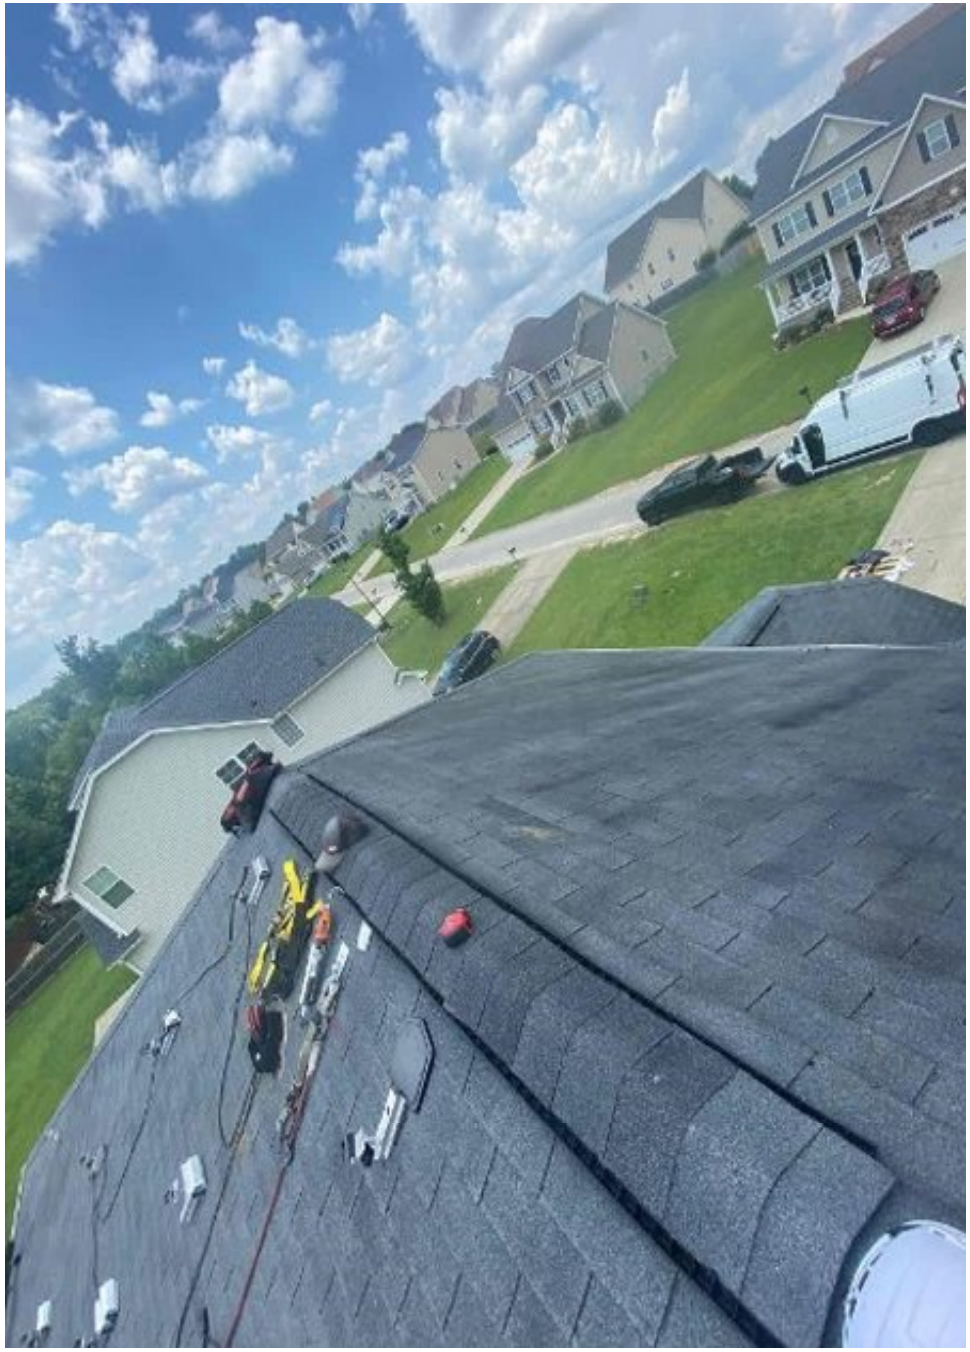

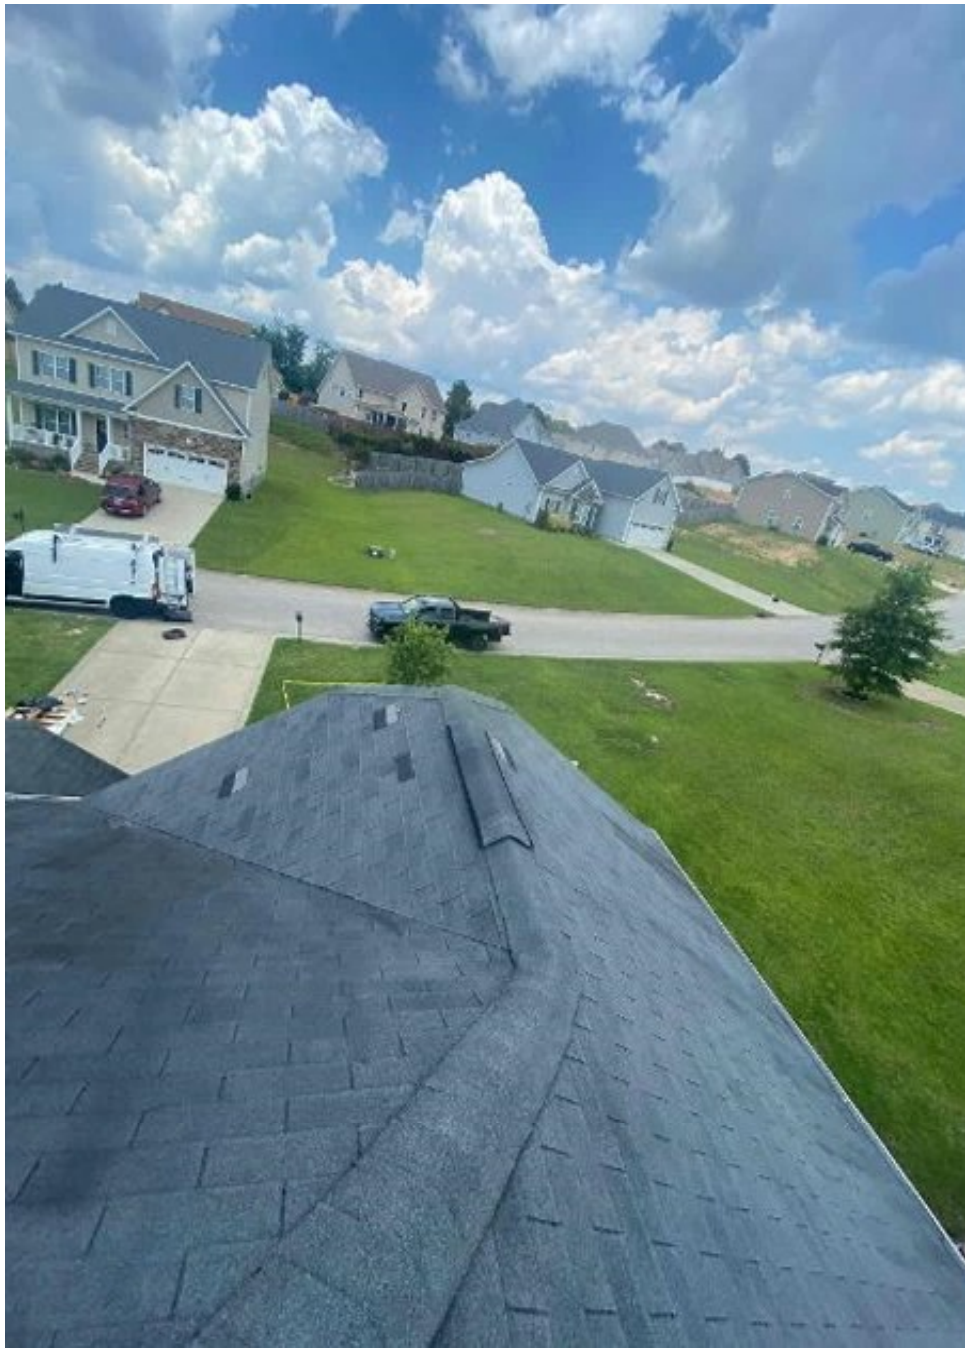

CAUTION

ENPHASE.
IQ Combiner 4
Photovoltaic
Combiner Box
X-IQ-AM1-240-4
NOM
For IQ-8 Grid
Forming System

25
HOM
DP-4075