

HTE# 05-5-13450

IMPROVEMENT PERMIT 22293

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) Comfort Homes, Inc. New Installation Septic Tank Repair

Property Location: SR# 1462 Christian Light Rd Nitrification Line Expansion

Subdivision Forest Trails Lot # C2

Tax ID# _____ Quadrant # _____

Number of Bedrooms Proposed: 3 (360 gpd) Lot Size: .462 Ac

Basement with Plumbing: Garage:

Water Supply: Well Public Community

Distance From Well: 50 ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other Pump to 25% Reduction System

Size of tank: Septic Tank: 1000 gallons Pump Tank: 1000 gallons


Subsurface No. of exact length width of depth of
Drainage Field ditches 4 of each ditch 75 ft. ditches 3 ft. ditches 20 in.

French Drain Required: _____ Linear feet

Date: 1/13/2006
PERMIT EXPIRES 5 YEARS FROM ABOVE DATE

This permit is subject to revocation if site plans or intended use change.

Signed: Bryan McSwain, R.S.
Environmental Health Specialist

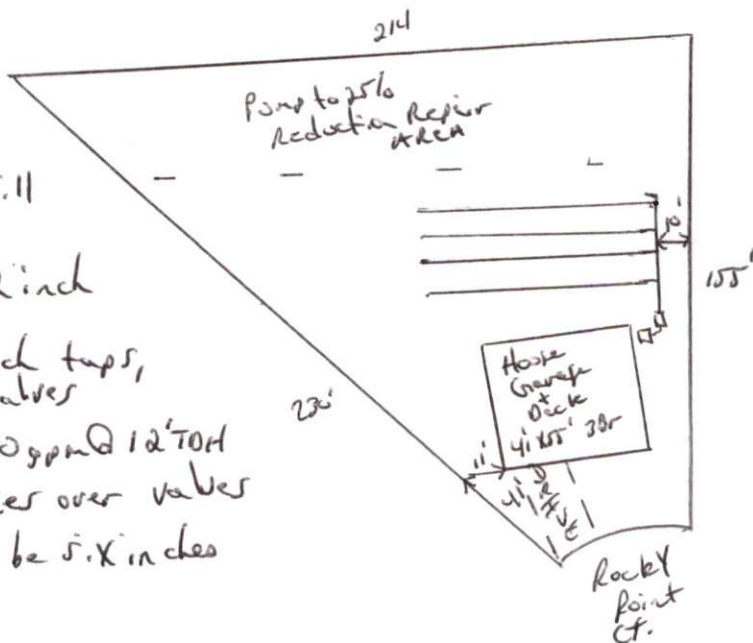

- * Maintain all setbacks
- * Stepdowns will be needed
- * Use sch 40 2 inch supply line
- * sch 40 1/2 inch taps, bushings & ball valves
- * Pump to use 30 gpd @ 12' TDH
- * Use valve boxes over valves
- * Draw down to be 5.8 inches

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH
AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 22293. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. *This authorization will be invalid if ownership, site plans, or intended use change.*

Confort Homes Inc 919 853-3242
Name Telephone #

P.O. Box 369 Clayton, N.C. 27528
Address

1412 Christian Light
Property Location SR# Road Name

Forest Trails 62 3 (360 sq ft) .462 ac
Subdivision Lot # # Bedrooms Proposed Lot Size

TYPE OF SYSTEM

New Installation Repair Septic Tank Nitrification Lines

Conventional Other Pump to 25% reduction system

Basement With Plumbing Without Plumbing

Water Supply: Well Public Water Supply Minimum Well Setback: 50 Ft.

Septic Tank 1000 gal Pump Chamber 1000 gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 1 # of lines per field 4 Length of lines 75 Ft.

Width of ditches 3 ft. Depth of ditches 20 inches

French Drain: Linear feet required _____ Depth of gravel _____

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

[Signature]
Signature of Authorized Agent for Harnett County

1/13/2006
Date