

HTE# OG-5-14723RR

Harnett County Department of Public Health

25312

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: F. LEE GARCIA PROPERTY LOCATION: CHALYBEATE SPRINGS
 NEW REPAIR EXPANSION SUBDIVISION: CROSSLINK LOT # 33
 Type of Structure: SFD (52x38) Site Improvements required prior to Construction Authorization Issuance:
 Proposed Wastewater System Type: 25% REDUCTION
 Projected Daily Flow: 240 GPD
 Number of bedrooms: 2 Number of Occupants: 4 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 100 feet Permit valid for: Five years
 Permit conditions: No expiration

Authorized State Agent: [Signature] es Date: 4/15/09 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: F. LEE GARCIA PROPERTY LOCATION: CHALYBEATE SPRINGS
 Facility Type: SFD (52x38) New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION (Initial) Wastewater Flow: 240 GPD
 (See note below, if applicable
DEP W/ PRETREATMENT (Repair)

Installation Requirements/Conditions

Septic Tank Size <u>1000</u> gallons	Number of trenches <u>5</u>	Trench Spacing: <u>9</u> Feet on Center
Pump Tank Size _____ gallons	Exact length of each trench <u>40</u> feet	Soil Cover: <u>6</u> inches
	Trenches shall be installed on contour at a	(Maximum soil cover shall not exceed
	Maximum Trench Depth of: <u>12</u> inches	36" above the trench bottom)
	(Trench bottoms shall be level to +/-1/4"	
	in all directions)	

Pump Requirements: _____ ft. TDH vs. _____ GPM _____ inches below pipe
 Aggregate Depth: _____ inches above pipe
 Conditions: MINIMUM OF 6" OF COVER NEEDED OVER DRAINFIELD. THIS PERMIT
BASED ON PROPOSAL FROM SOIL CONSULTANT _____ inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] es Date: 4/15/09
 Construction Authorization Expiration Date: 4/15/14


HTE# 06-5-14723RR

Permit # 25312

Harnett County Department of Public Health Site Sketch

ISSUED TO: F. LEE GARCIA PROPERTY LOCATOR: CHALIBEATE SPRINGS
SUBDIVISION CROSSLINK LOT # 33

Authorized State Agent: [Signature] Date: 4/15/09

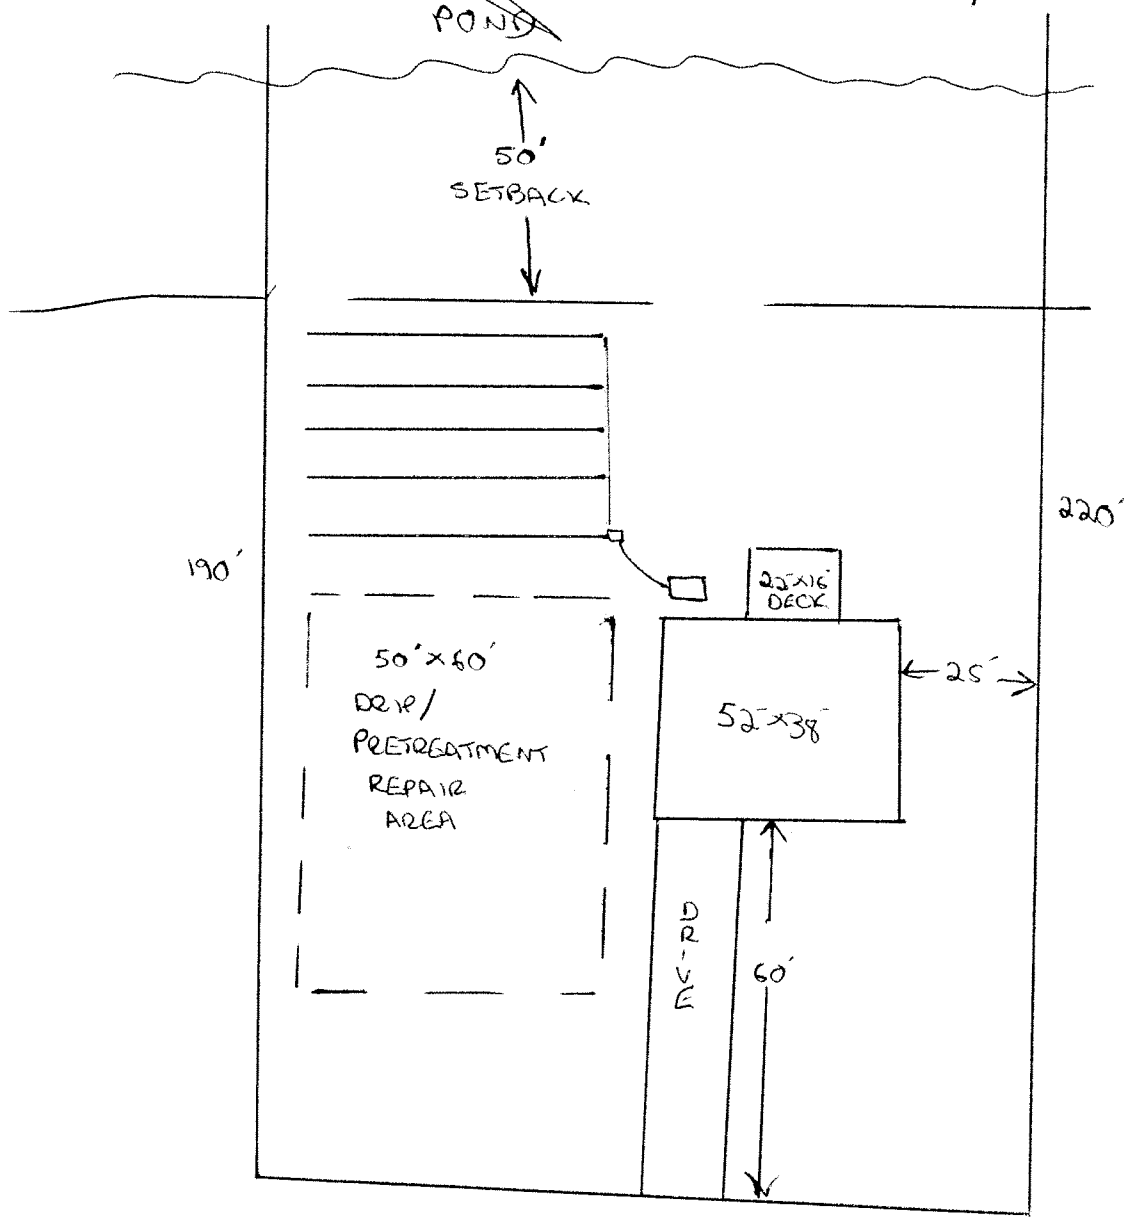

CROSSLINK DR