

HTE# 06-5-14762

IMPROVEMENT PERMIT 22972

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) HAMPTON CUSTOM BUILDERS New Installation Septic Tank Repair
 Property Location: SR# 1437 BALLARD RD Nitrification Line Expansion
 Subdivision BALLARD WOODS Lot # 95
 Tax ID# _____ Quadrant # _____
 Number of Bedrooms Proposed: 3 (360 gal) Lot Size: .574 ac

Basement with Plumbing: Garage:
 Water Supply: Well Public Community
 Distance From Well: 100 ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other PUMP TO 25% REDUCTION
 Size of tank: Septic Tank: 1000 gallons Pump Tank: 1000 gallons

Subsurface No. of exact length width of depth of
 Drainage Field ditches 5 of each ditch 60 ft. ditches 3 ft. ditches 18 in.


French Drain Required: _____ Linear feet

This permit is subject to revocation if site plans or intended use change.

Date: 5/22/06
PERMIT EXPIRES 5 YEARS FROM ABOVE DATE

Signed: [Signature] RS (OLIVER TOLKSOEFF)
 Environmental Health Specialist

- * MAINTAIN ALL SETBACKS
- * PUMP SPECS
38 gpm @ 11'
- * MANATEE
5 1/2" SCH 40 TAPS
2' PRESSURE HEAD
2" SCH 40 LINE
- * CALL WITH ANY QUESTIONS PRIOR TO INSTALLATION

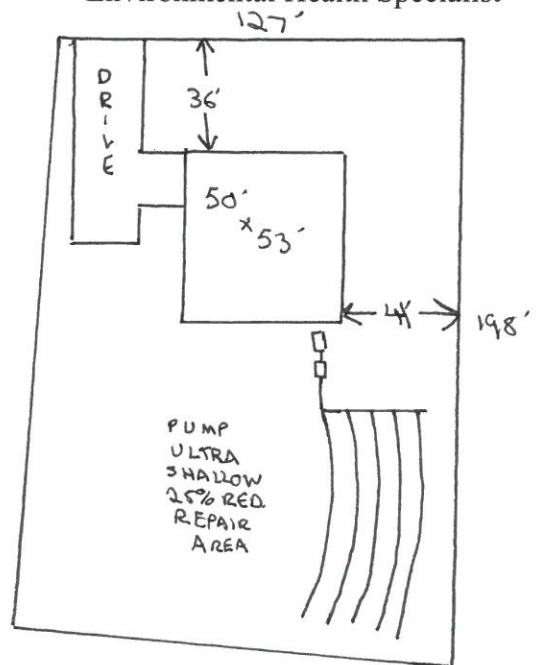

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH
AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 22972. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. *This authorization will be invalid if ownership, site plans, or intended use change.*

HAMPTON CUSTOM BUILDER 919-524-2915
Name Telephone #

PO Box 655 HOLLY SPRINGS NC 27540
Address

1437 BALLARO RD
Property Location SR# Road Name

BALLARO WOODS 95 3(360 gpd) .574 AC
Subdivision Lot # # Bedrooms Proposed Lot Size

TYPE OF SYSTEM

- New Installation [] Repair Septic Tank Nitrification Lines
[] Conventional Other PUMP TO 25% REDUCTION SYSTEM
[] Basement [] With Plumbing [] Without Plumbing

Water Supply: [] Well Public Water Supply Minimum Well Setback: 100 Ft.

Septic Tank 1000 gal Pump Chamber 1000 gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 1 # of lines per field 5 Length of lines 60 Ft.
Width of ditches 3 ft. Depth of ditches 36 inches
French Drain: Linear feet required _____ Depth of gravel _____

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

[Signature]
Signature of Authorized Agent for Harnett County

5/22/06
Date