

Please Scan

**Thomas J. Boyce**  
11886 NC 42  
Holly Springs, NC 27540  
919-557-0826  
NC Licensed Soil Scientist # 1241  
NC Registered Sanitarian # 1353

**Larry Ellis**  
4880 Christian Light Rd  
Fuquay-Varina, NC 27526

Re: 1+/- acre lot, Christian Light Rd., Harnett Co.

Dear Mr. Ellis,


A preliminary soils evaluation was been completed on the above referenced property on June 12, 2006. The purpose of the evaluation was to determine the ability of the soils to support a subsurface waste disposal system. All ratings and determinations were made in accordance with "Laws and Rules for Sewage Treatment and Disposal Systems, 15A NCAC 18A .1900".

The above referenced tract was evaluated by auger borings and landscape position. Enclosed is a sketch showing the proposed system area and system design. Soils in this area were greater than thirty inches of loamy sand or sandy loam over a sandy clay loam. The proposed system is a gravity flow conventional system at eighteen to twenty-four inches deep. Total trench length would be at least two hundred feet at a .6 gpd/sqft. The repair area would remain as permitted by the county as the initial system.

This report does not guarantee or represent approval or issuance of permits as needed by the local health department. This report only represents my opinion as a licensed soil scientist. I trust this is the information that you require at this time. If you have any questions, please call.

Sincerely,


*Thomas J. Boyce*  
Thomas J. Boyce

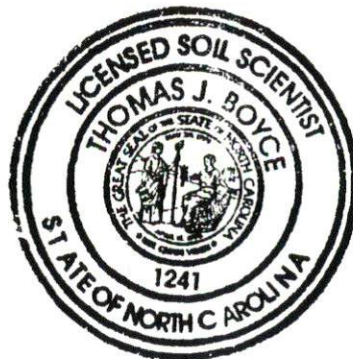

1" = 60'

← Repair →

1 x 200' x 3' x 18-22"  
conventional  
6 LTR

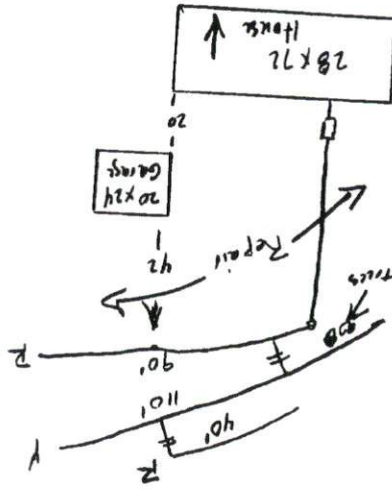

Larry Ellis  
4880 Christian Light Rd



Please Scan