

HTE# 06-5-15191

IMPROVEMENT PERMIT 23164

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) RBC HOMES INC New Installation Septic Tank Repair
 Property Location: SR# 2026 BYRO POND RD Nitrification Line Expansion
 Subdivision BYRO POND ESTATES Lot # 9
 Tax ID# _____ Quadrant # _____
 Number of Bedrooms Proposed: 3 (360 gpd) Lot Size: 8200

Basement with Plumbing: Garage:
 Water Supply: Well Public Community
 Distance From Well: 100 ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional Other PUMP TO 25% REDUCTION SYSTEM

Size of tank: Septic Tank: 1000 gallons Pump Tank: 1000 gallons

Subsurface Drainage Field No. of ditches 5 exact length of each ditch 60 ft. width of ditches 3 ft. depth of ditches 18 in.


French Drain Required: _____ Linear feet

Date: 7/26/06
PERMIT EXPIRES 5 YEARS FROM ABOVE DATE

This permit is subject to revocation if site plans or intended use change.

Signed: [Signature] RS (OLIVER TOLKSDORF)
 Environmental Health Specialist

- * MAINTAIN ALL SETBACKS
- * PUMP SPECS 10.5 ^{OF} 1014
37 gpm @ 4.5 TDH
- * MANATEE SPECS
5 1/2 SCH 40 VALVES
2' PRESSURE HEAD
2" SCH 40 PIPE
- * CALL WITH ANY QUESTIONS PRIOR TO INSTALLATION

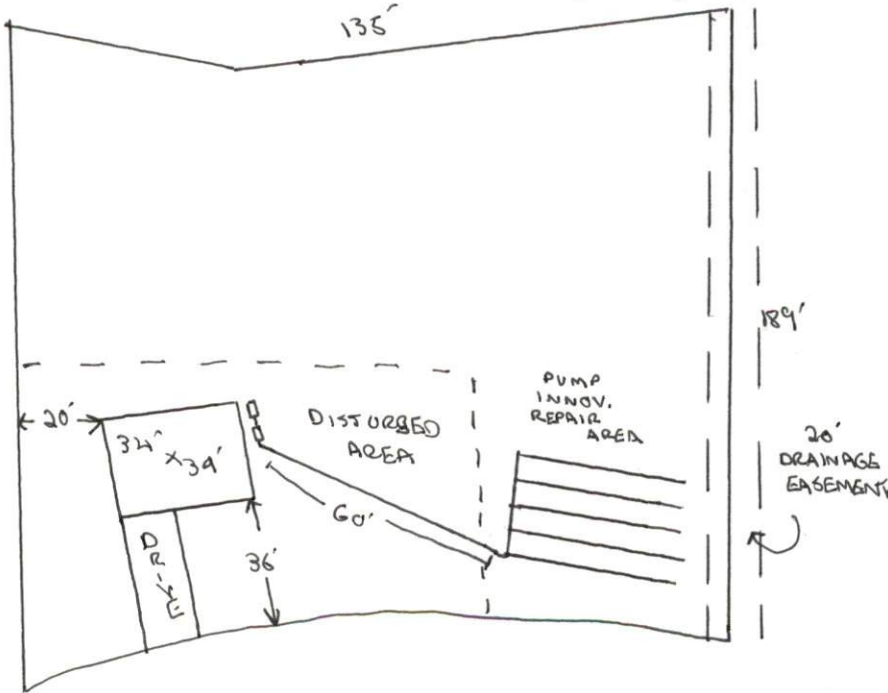

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH
AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 23164. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. *This authorization will be invalid if ownership, site plans, or intended use change.*

RBC Homes Inc 423-3555
Name Telephone #
PO Box 755 Fayetteville NC 28302
Address
2026 Byrd Pond Rd
Property Location SR# Road Name
Byrd Pond Est. 9 3 (360 sq ft) .82 ac
Subdivision Lot # # Bedrooms Proposed Lot Size

TYPE OF SYSTEM

New Installation [] Repair Septic Tank Nitrification Lines
[] Conventional Other Pump To 25% Reduction
[] Basement [] With Plumbing [] Without Plumbing
Water Supply: [] Well Public Water Supply Minimum Well Setback: 100 Ft.
Septic Tank 1000 gal Pump Chamber 1000 gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 1 # of lines per field 5 Length of lines 60 Ft.
Width of ditches 3 ft. Depth of ditches 18 inches
French Drain: Linear feet required _____ Depth of gravel _____

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

[Signature] RS 7/26/06
Signature of Authorized Agent for Harnett County Date