

HTE# 06-5-15730

IMPROVEMENT PERMIT 22598

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) B. H. Buchan (Leader Homes) New Installation Septic Tank Repair
 Property Location: SR# 1437 Ballard Rd Nitrification Line Expansion
 Subdivision Riverstone Lot # 2
 Tax ID# _____ Quadrant # _____
 Number of Bedrooms Proposed: 3 (360 gpd) Lot Size: .6 AC

Basement with Plumbing: Garage:
 Water Supply: Well Public Community
 Distance From Well: 50 ft.

Following is the minimum specifications for sewage disposal system on above captioned property.
Subject to final approval.

Type of system: Conventional Other _____

Size of tank: Septic Tank: 1000 gallons Pump Tank: _____ gallons

Subsurface Drainage Field No. of ditches 4 exact length of each ditch 75 ft. width of ditches 3 ft. depth of ditches 12-18 in.

French Drain Required: _____ Linear feet


Date: 10/27/2006

PERMIT EXPIRES 5 YEARS FROM ABOVE DATE

This permit is subject to revocation if site plans or intended use change.

Signed: Dwight McSwain R.S.
 Environmental Health Specialist

- * Maintain all setbacks
- * Round ditches on contour
- + NO DEEPER than 18 inches
- * Top ditch to go in at 12 inches
- * Contractor to meet on site prior to installing system
- * System must have 6 inches of cover

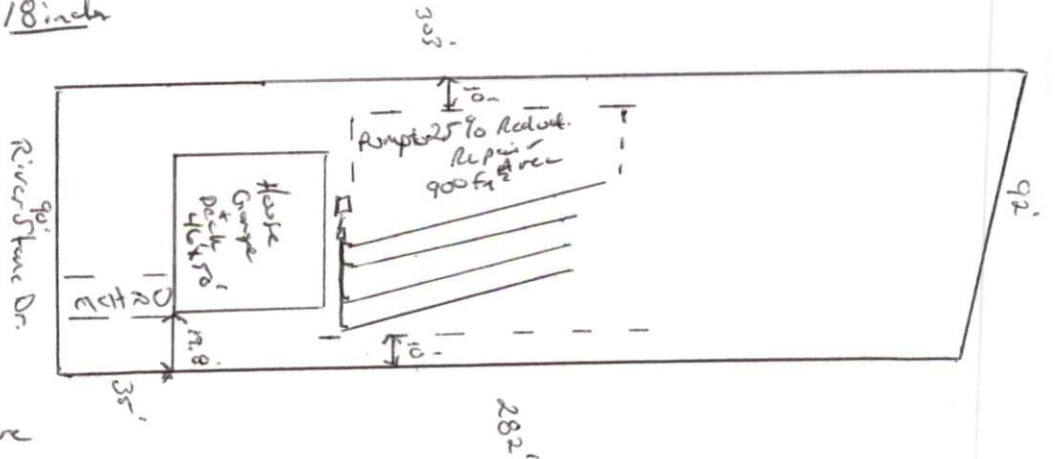

HARNETT COUNTY DEPARTMENT OF PUBLIC HEALTH
AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Department of Public Health, Improvement Permit # 22598. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. ***This authorization will be invalid if ownership, site plans, or intended use change.***

Bill Buchan (Leader Homer)
Name

248 969 3542
Telephone #

121 E. Davison Lk. Rd. Metamora, MI 48455
Address

1437
Property Location SR#

Ballard
Road Name

Riverstone
Subdivision

2
Lot #

3 (360 sq ft)
Bedrooms Proposed

.6 Ac
Lot Size

TYPE OF SYSTEM

New Installation Repair Septic Tank Nitrification Lines

Conventional Other _____

Basement With Plumbing Without Plumbing

Water Supply: Well Public Water Supply Minimum Well Setback: 50 Ft.

Septic Tank 1000 gal Pump Chamber _____ gal

NITRIFICATION FIELD SPECIFICATIONS

Number of fields 1 # of lines per field 4 Length of lines 75 Ft.

Width of ditches 3 ft. Depth of ditches 12-18 inches

French Drain: Linear feet required _____ Depth of gravel _____

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

Bryan McSwain, P.E.
Signature of Authorized Agent for Harnett County

10/27/2006
Date