

HTE# 065-16065

Hamilton County Department of Public Health

23453

Improvement Permit

A building permit cannot be issued with only an Improvement Permit.

ISSUED TO: Stencil Builders, Inc

PROPERTY LOCATION: SR 1403 Cokesbury Rd
SUBDIVISION Cokesbury Park LOT # 40

NEW REPAIR EXPANSION

Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: SFD

Proposed Wastewater System Type: pump to conventional

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: 6 max

Basement Yes No

Pump Required: Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well 50 feet

Permit valid for: Five years
 No expiration

Permit conditions: Start ditches at 22 inches & run to 18 inches
Ditches to be NO DEEPER than 22 inches

Authorized State Agent: Bryan McSwain, R.S. Date: 11/29/2006

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Stencil Builder, Inc.

PROPERTY LOCATION: SR 1403 Cokesbury Rd
SUBDIVISION Cokesbury Park LOT # 40

Facility Type: SFD New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** pump to conventional (Initial) Wastewater Flow: 360 GPD

(See note below, if applicable)
pump to conventional (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons
Pump Tank Size 1000 gallons

Exact length of each trench 4X60 feet
Trenches shall be installed on contour at a
Maximum Trench Depth of: 22 inches
(Trench bottoms shall be level to $\pm 1/4$ "
in all directions)

Trench Spacing: 9 Feet on Center
Soil Cover: 6-10 inches
(Maximum soil cover shall not exceed
36" above the trench bottom)

Pump Requirements: _____ ft. TDH vs. _____ GPM

Aggregate Depth: 6 inches below pipe
2 inches above pipe
12 inches total

Conditions: Ditches to be NO DEEPER than 22 inches

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: Bryan McSwain, R.S. Date: 11/29/2006

SEE ATTACHED SITE SKETCH

Construction Authorization Expiration Date: 11/29/2011


HTE# 065-16065

Permit # 23453

Harnett County Department of Public Health Site Sketch

ISSUED TO: Streich Builders Inc PROPERTY LOCATOR: Cokesbury Rd
SUBDIVISION: Cokesbury Park LOT # 40

Authorized State Agent: Erin M. Swain, R.S. Date: 11/29/2001

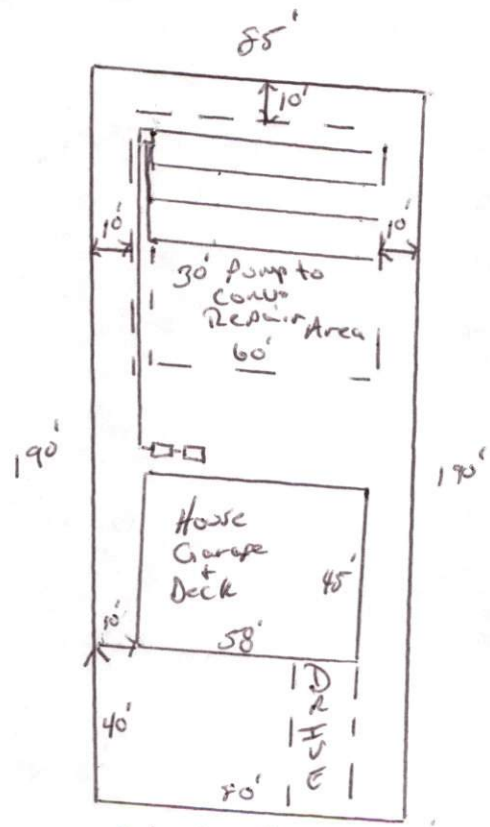

Cokesbury Park Lane