

HTE# 07-50016526 Harnett County Department of Public Health 23614

### Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Council & (A/C) PROPERTY LOCATION: 1141  
 NEW  REPAIR  EXPANSION  SUBDIVISION: The Summit LOT # 119  
 Type of Structure: SFD-58x52 4DR Site Improvements required prior to Construction Authorization Issuance:  
 Proposed Wastewater System Type: 25% Reduction System  
 Projected Daily Flow: 480 GPD  
 Number of bedrooms: 4 Number of Occupants: 8 max  
 Basement  Yes  No  
 Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
 Type of Water Supply:  Community  Public  Well Distance from well 10 feet  
 Permit conditions: Stub out plumbing shallow where shown Permit valid for:  Five years  
Maintain All Setbacks meet code  No expiration

Authorized State Agent: [Signature] Date: 01-22-07 SEE ATTACHED SITE SKETCH  
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

### Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Council & (A/C) PROPERTY LOCATION: 1141  
 Facility Type: SFD-58x52-4DR  New  Expansion  Repair  
 Basement?  Yes  No Basement Fixtures?  Yes  No  
 Type of Wastewater System\*\* 25% Reduction System (Initial) Wastewater Flow: 480 GPD  
 (See note below, if applicable) 32LF of LPP (Repair)

#### Installation Requirements/Conditions

Septic Tank Size 1200 gallons Exact length of each trench 1x210 feet Trench Spacing: 9 Feet on Center  
 Pump Tank Size \_\_\_\_\_ gallons Trenches shall be installed on contour at a Soil Cover: 6 inches  
 Maximum Trench Depth of: 18x4 inches (Maximum soil cover shall not exceed 36" above the trench bottom)  
 Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM in all directions  
 Conditions: \_\_\_\_\_ Aggregate Depth: \_\_\_\_\_ inches below pipe  
 \_\_\_\_\_ inches above pipe  
 \_\_\_\_\_ inches total

\*\*If applicable: *I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.*

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: [Signature] Date: 01-22-07 SEE ATTACHED SITE SKETCH

Construction Authorization Expiration Date: 01-22-2012

HTE# 07-50016526

Permit # 23614

# Harnett County Department of Public Health Site Sketch

ISSUED TO: Caviness 9 (ate)

PROPERTY LOCATOR: 1141

SUBDIVISION: The Summit

LOT # 119


Authorized State Agent: J. Wade

Date: 01-22-07

Lot 107

Lot 108

Lot 109

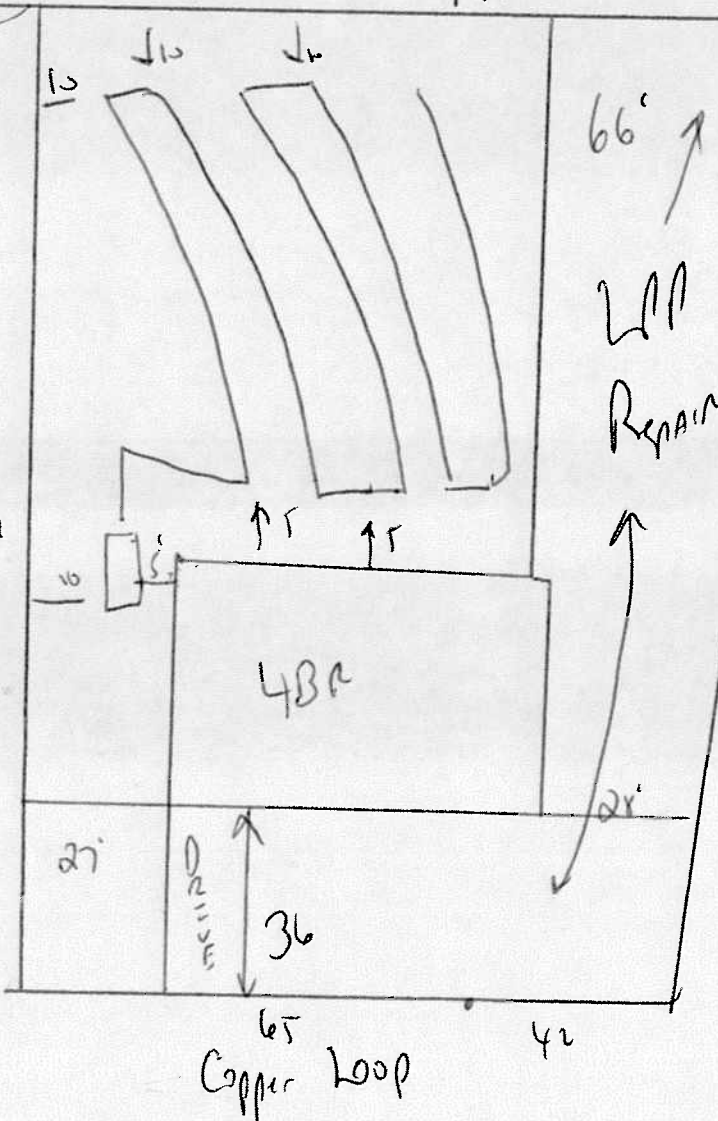

STUB out  
 Plumbing  
 shallow  
 maintain all  
 155 Set Backs  
 meet onsite  
 Install 1x210  
 & 25% Reduction  
 SYSTEM