

HTE# 07-500/6795

Harnett County Department of Public Health

23660

Improvement Permit

"Cumberland Homes"

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Craftsman Court, Mary Norris; PROPERTY LOCATION: 1210; SUBDIVISION: Per Simmon Hill; LOT # 58; Type of Structure: SFD 56x36-3BR; Proposed Wastewater System Type: Pump to 25% Red. system + 12"; Projected Daily Flow: 360 GPD; Number of bedrooms: 3; Number of Occupants: 6 max; Basement: No; Pump Required: Yes; Type of Water Supply: Public; Permit conditions: Meet onsite for Final Layout maintain all set backs; Install At 12" Deep - must BEING in 8 to 12" of approved cover

Authorized State Agent: Joe Waters; Date: 02-15-07; SEE ATTACHED SITE SKETCH; The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Craftsman Court, Mary Norris; PROPERTY LOCATION: 1210; SUBDIVISION: Per Simmon Hill; LOT # 58; Facility Type: SFD - 56x36 3BR; Basement: No; Type of Wastewater System: Pump to 25% Red. 12" deep; Wastewater Flow: 360 GPD; (See note below, if applicable) 480 LF of LPP (Repair)

Installation Requirements/Conditions

Septic Tank Size: 1000 gallons; Pump Tank Size: 1000 gallons; Exact length of each trench: 1 x 300 feet; Trench Spacing: 9 Feet on Center; Trenches shall be installed on contour at a Maximum Trench Depth of: 12 inches; (Maximum soil cover shall not exceed 36" above the trench bottom) in all directions; Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM; Aggregate Depth: \_\_\_\_\_ inches below pipe, \_\_\_\_\_ inches above pipe, \_\_\_\_\_ inches total

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: Joe Waters; Date: 02-15-07; SEE ATTACHED SITE SKETCH; Construction Authorization Expiration Date: 02-15-2012

HTE# 07-50016795

Permit # 23660

# Harnett County Department of Public Health Site Sketch

"Cumberland Homes"


PROPERTY LOCATOR: SR 1210

ISSUED TO: CRAFTSMAN Const. / Danny Morris SUBDIVISION Persimmon Hill LOT # 58

Authorized State Agent: Ja [Signature]

Date: 02-15-07

SR 1210  
281

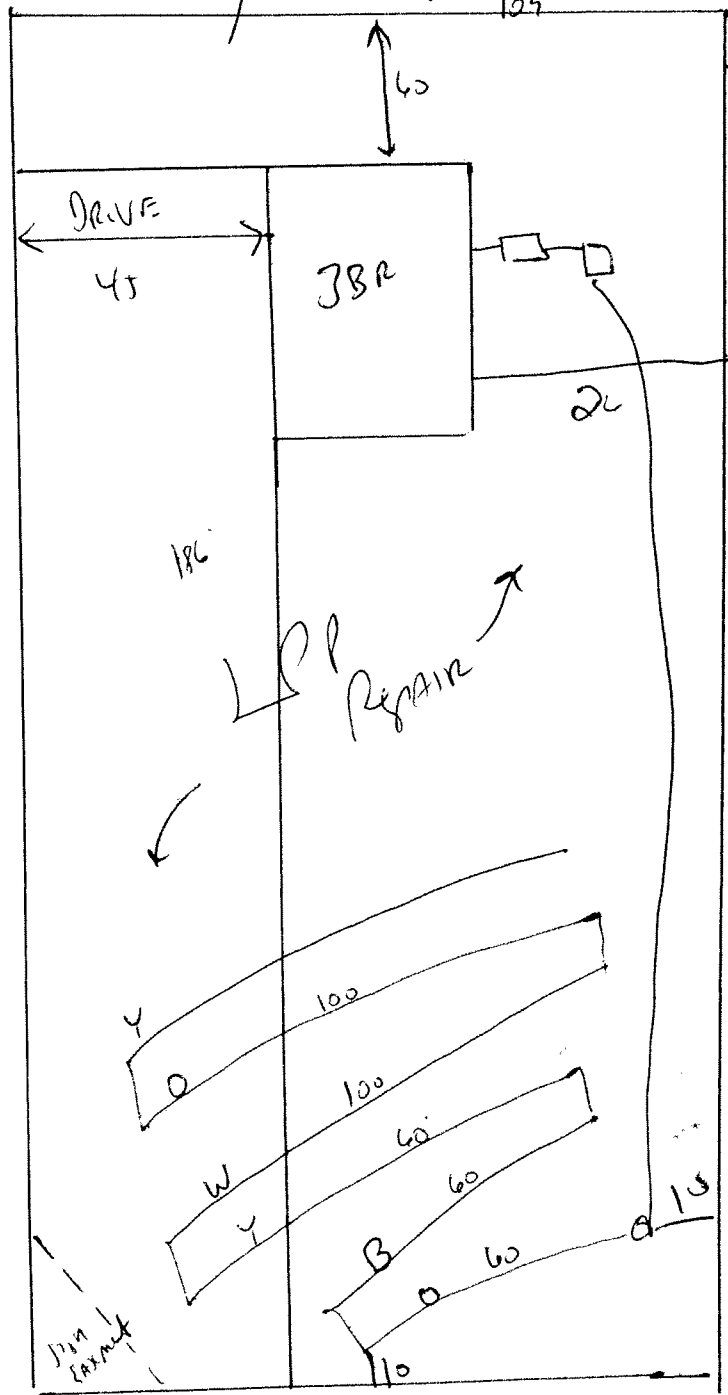

Meet onsite for  
Final Layout  
Maintain all set Back,  
Must Bring in 8 to 12"  
of Approval soil  
Install 1x300 ~~at~~ <sup>1/2%</sup> reduction  
system  
at 12" Deep.

100