

SOUTHEASTEN SOIL & ENVIRONMENTAL ASSOC, INC.

PROPOSED SUBSURFACE WASTE DISPOSAL SYSTEM DETAIL SHEET

SUBDIVISION Hunters Point

LOT 37

INITIAL SYSTEM Approved 25% reduction

REPAIR Approved 25% reduction

DISTRIBUTION serial

DISTRIBUTION serial

BENCHMARK 100.0

LOCATION rear corner 36/37

NO. BEDROOMS 3

proposed LTAR = 0.3 gpd/ft²

| <u>LINE</u> | <u>FLAG COLOR</u> | <u>ELEVATION</u> | <u>ACTUAL LENGTH</u> |
|-------------|-------------------|------------------|----------------------|
|-------------|-------------------|------------------|----------------------|

| | | | |
|---|---|--------|---------------|
| 1 | 0 | 103.08 | 45 |
| 2 | B | 101.58 | 95 |
| 3 | 0 | 100.84 | 85 |
| 4 | B | 99.75 | 70 |
| | | | <u>300 LF</u> |

Initial

| | | | |
|---|---|--------|---------------|
| 5 | U | 103.08 | 85 |
| 6 | 0 | 101.58 | 85 |
| 7 | Y | 99.84 | 85 |
| 8 | 0 | 99.00 | 45 |
| | | | <u>300 LF</u> |

BY MEAKER, ABERO

DATE 02/2007


Southeastern Soil & Environmental Associates, Inc.

P.O. Box 9321
Fayetteville, NC 28311
Phone/Fax (910) 822-4540
Email meaker3851@aol.com

Hunters Point

Lot 37

Proposed Septic

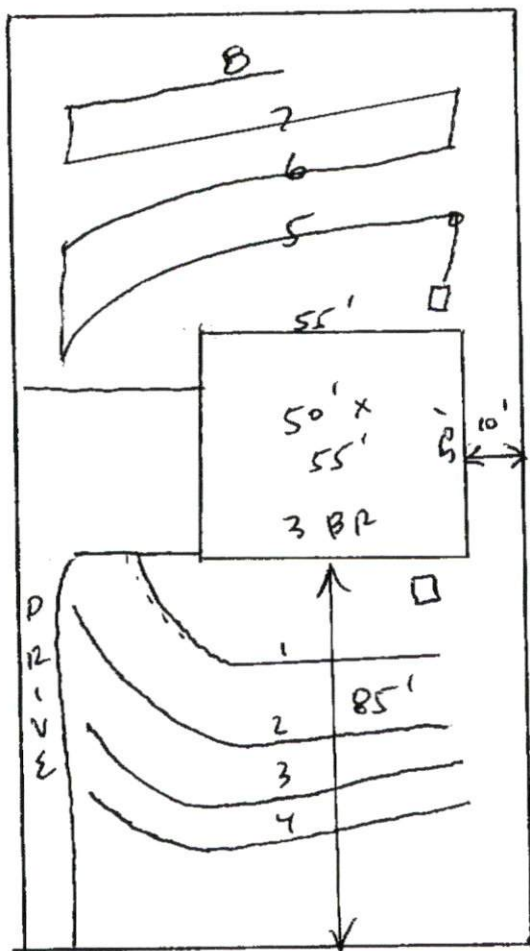

ROAD

1" = 40'

Aug 03 07 01:53p

michael eaker

9108224540

p.7

Southeastern Soil & Environmental Associates, Inc.

P.O. Box 9321
Fayetteville, NC 28311
Phone/Fax (910) 822-4540
Email meaker3851@aol.com

MEMO (8/3/2007)

To: Gina/Freddie

From: Mike Eaker *ME*

Re: Hunter's Point Lots (37), 38, 39 & 40

Following are layouts for 37 & 38 which have been approved by the health department (please notice the revised house location & size on lot 37). You should submit a new plot plan for lot 37

Lots 39 & 40 are much more difficult. I have attached a map showing 2 options:

1- where you can get 2 lots with each house setback about 135 feet back (pretreatment systems required on repairs) or;

2- recombination of the 2 lots with a normal setback.

Please advise as to how to proceed!

Aug 03 07 01:53p

michael eaker

9108224540

p.5

SOUTHEASTEN SOIL & ENVIRONMENTAL ASSOC, INC.

PROPOSED SUBSURFACE WASTE DISPOSAL SYSTEM DETAIL SHEET

SUBDIVISION Hunter's Point

LOT 37

INITIAL SYSTEM Approved 25% reduction

REPAIR Approved 25% reduction

DISTRIBUTION serial

DISTRIBUTION serial

BENCHMARK 100.0

LOCATION rear corner 36/37

NO. BEDROOMS 3

proposed LTAR = 0.3 gpd/ft²

LINE FLAG COLOR ELEVATION ACTUAL LENGTH

| | | | |
|---|---|--------|---------------|
| 1 | 0 | 103.08 | 45 |
| 2 | B | 101.58 | 45 |
| 3 | 0 | 100.84 | 85 |
| 4 | B | 99.75 | 75 |
| | | | <u>300 LF</u> |

Initial {

| | | | |
|---|---|--------|---------------|
| 5 | U | 103.08 | 85 |
| 6 | 0 | 101.58 | 85 |
| 7 | Y | 99.84 | 85 |
| 8 | 0 | 99.00 | 45 |
| | | | <u>300 LF</u> |

BY MEAKER, A BYRD

DATE 07/2007