HTE# 07-5-17099   **Harnett County Department of Public Health**   23478

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Sky High Development, Inc.

PROPERTY LOCATION: SR 1403 Harnett Central Rd.

SUBDIVISION Brian Keith Meadows   LOT # 1

NEW ☑   REPAIR ☐   ,EXPANSION ☐

Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: SFD 52X43

Proposed Wastewater System Type: Accepted System

Projected Daily Flow: 360   GPD

Number of bedrooms: 3   Number of Occupants: 6   max

Basement ☐Yes ☐ No

Pump Required: ☐Yes ☑ No   ☑ May be required based on final location and elevations of facilities

Type of Water Supply: ☐ Community ☑ Public ☐ Well   Distance from well _____ feet   Permit valid for: ☑ Five years

Permit conditions: _____   ☐ No expiration

Authorized State Agent: _Bryan McSwain, L.S._   Date: 3/22/2007   **SEE ATTACHED SITE SKETCH**

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization
(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958. and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Sky High Dev, Inc.

PROPERTY LOCATION: SR 1403

SUBDIVISION Brian Keith Meadows   LOT # 1

Facility Type: SFD 52X43   ☑ New ☐ Expansion ☐ Repair

Basement? ☐ Yes ☑ No   Basement Fixtures? ☐ Yes ☐ No

Type of Wastewater System** __Accepted System__ (Initial)   Wastewater Flow: 360   GPD

(See note below, if applicable ☐)

__Accepted System__ (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons

Pump Tank Size _____ gallons

Exact length of each trench 4 X 75 feet

Trenches shall be installed on contour at a
Maximum Trench Depth of: 18 inches
(Trench bottoms shall be level to +/-1/4"
in all directions)

Trench Spacing: 9 Feet on Center

Soil Cover: 6-8 inches
(Maximum soil cover shall not exceed
36" above the trench bottom)

Pump Requirements: _____ ft. TDH vs. _____ GPM

_____ inches below pipe

Aggregate Depth: _____ inches above pipe

_____ inches total

Conditions: Run ditches on contour + No Deeper than 18 inches
Plumbing may need to be stubbed out shallow to maintain ditch depths

If applicable: *I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.*

Owner/Legal Representative Signature: _____   Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: _Bryan McSwain, L.S._   Date: 3/22/2007

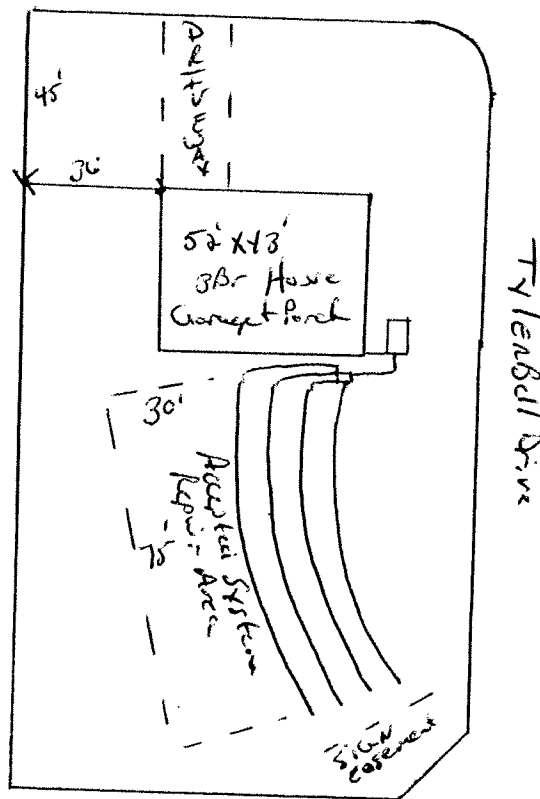Construction Authorization Expiration Date: 3/22/2012

HTE# _07-5-17099_   Permit # _23478_

Harnett County Department of Public Health
Site Sketch

PROPERTY LOCATON: _SR 1403 Harrett Central Rd_

ISSUED TO: _Sky High Development Inc_   SUBDIVISION _Brian Keith Meadows_   LOT # _1_

Authorized State Agent: _Bryan McSwain, R.S._   Date: _3/22/2007_

*Ditch Depths to be
No DEEPER than
18 inches

Harnett Central Rd.