

HTE# 07-500-17429RRR

Harnett County Department of Public Health

25517

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: AQ Contracting PROPERTY LOCATION: 1139 SUBDIVISION: Fagen Patton's Point LOT # 90

NEW [X] REPAIR [] EXPANSION [] Type of Structure: SFD - 47x51 3BR Proposed Wastewater System Type: Pump to 25% Reduction system Projected Daily Flow: 360 GPD Number of bedrooms: 3 Number of Occupants: 6 max Basement [] Yes [X] No

Site Improvements required prior to Construction Authorization Issuance:

Pump Required: [X] Yes [] No [] May be required based on final location and elevations of facilities Type of Water Supply: [] Community [X] Public [] Well Distance from well 100 feet Permit valid for: [X] Five years [] No expiration

Permit conditions: Meet on site - Final Layout - Maintain All set Backs Do not Remove Any soil from the lot when cleaning - Keep water & Power Lines 10' from any part of septic system or Repair Area

Authorized State Agent: J. W. P. Date: 02-18-2015 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: AQ Contracting PROPERTY LOCATION: 1139 SUBDIVISION: Patton's Point LOT # 90 Facility Type: SFD-47x51-3BR [X] New [] Expansion [] Repair

Basement? [] Yes [X] No Basement Fixtures? [] Yes [X] No Type of Wastewater System** Pump to 25% Reduction system (Initial) Wastewater Flow: 360 GPD (See note below, if applicable) [X]

LPP Repair (Repair)

Installation Requirements/Conditions Number of trenches 1 Septic Tank Size 1000 gallons Exact length of each trench 270 feet Trench Spacing: 9 Feet on Center Pump Tank Size 1000 gallons Trenches shall be installed on contour at a Maximum Trench Depth of: 18 inches Soil Cover: 6 inches (Maximum soil cover shall not exceed 36" above the trench bottom) (Trench bottoms shall be level to +/- 1/4" in all directions)

Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: _____ inches below pipe _____ inches above pipe _____ inches total Conditions: _____

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: J. W. P. Date: 02-18-2015 Construction Authorization Expiration Date: 02-18-2015

HTE# 07-500-17429RRR

Permit # 25517

Harnett County Department of Public Health Site Sketch

ISSUED TO: Ad Contracty


PROPERTY LOCATOR: 1139

SUBDIVISION Palton Point

LOT # 9

Authorized State Agent: J. W. REH

Date: 02-18-2010

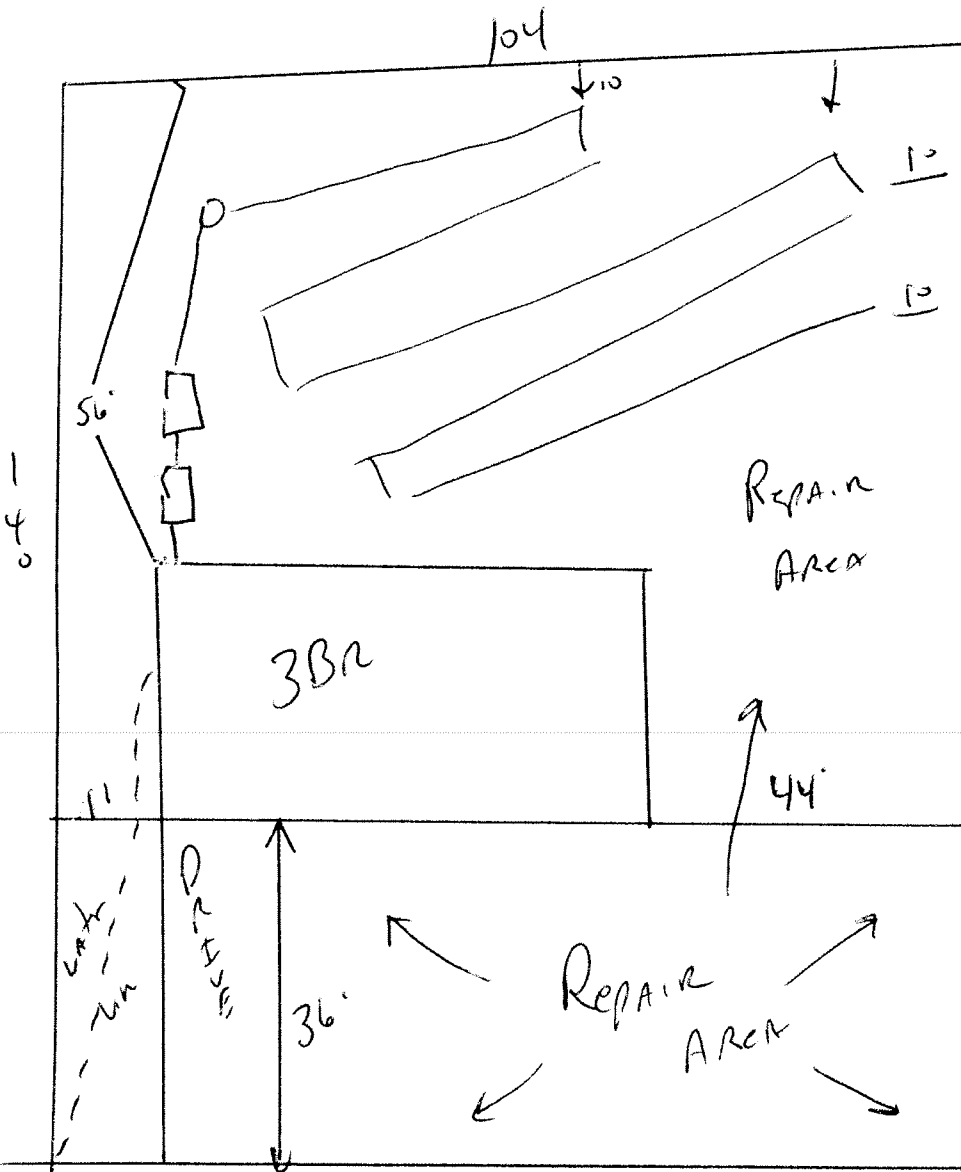

Meet onsite for
Final layout
Maintain all
setbacks
Do not remove
any soil when clearing
lot
Stub out plumbing
shallow, at ground
level or higher where
shown
Keep water & power
line 10' from septic
system & repair area.

103
Strike Eagle