

HTE# 07-500 17596

Harnett County Department of Public Health

23936

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Cumberland Homes
PROPERTY LOCATION: 1210 Hoover Rd
SUBDIVISION: Persimmon Hill LOT # 80
Type of Structure: SFD - 56x40 3BR
Proposed Wastewater System Type: Pump to 25% Reduction
Projected Daily Flow: 360 GPD
Number of bedrooms: 3 Number of Occupants: 6 max
Basement: No
Pump Required: No
Type of Water Supply: Public
Permit conditions: Meet onsite for final layout - maintain all set backs

Authorized State Agent: J. Williams Date: 6-08-07 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Cumberland Homes
PROPERTY LOCATION: 1210
SUBDIVISION: Persimmon Hill LOT # 80
Facility Type: SFD 56x40 3BR New
Basement? No
Type of Wastewater System: Pump to 25% Reduction
Wastewater Flow: 360 GPD
(See note below, if applicable) 480 LF 1 LPP (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons
Pump Tank Size 1000 gallons
Exact length of each trench 1 x 300 feet
Trenches shall be installed on contour at a Maximum Trench Depth of 18 max inches
Trench Spacing: 9 Feet on Center
Soil Cover: 6 inches
Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM
Aggregate Depth: \_\_\_\_\_ inches below pipe \_\_\_\_\_ inches above pipe \_\_\_\_\_ inches total

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: J. Williams Date: 6-8-07 SEE ATTACHED SITE SKETCH
Construction Authorization Expiration Date: 6-8-2012

HTE# 07-50017596

Permit # 23936

# Harnett County Department of Public Health Site Sketch

ISSUED TO: Cumberland Homes


PROPERTY LOCATOR: 1210 Hoover Rd

SUBDIVISION Persimmon Hill

LOT # 80

Authorized State Agent: Joe [Signature]

Date: 06-08-07

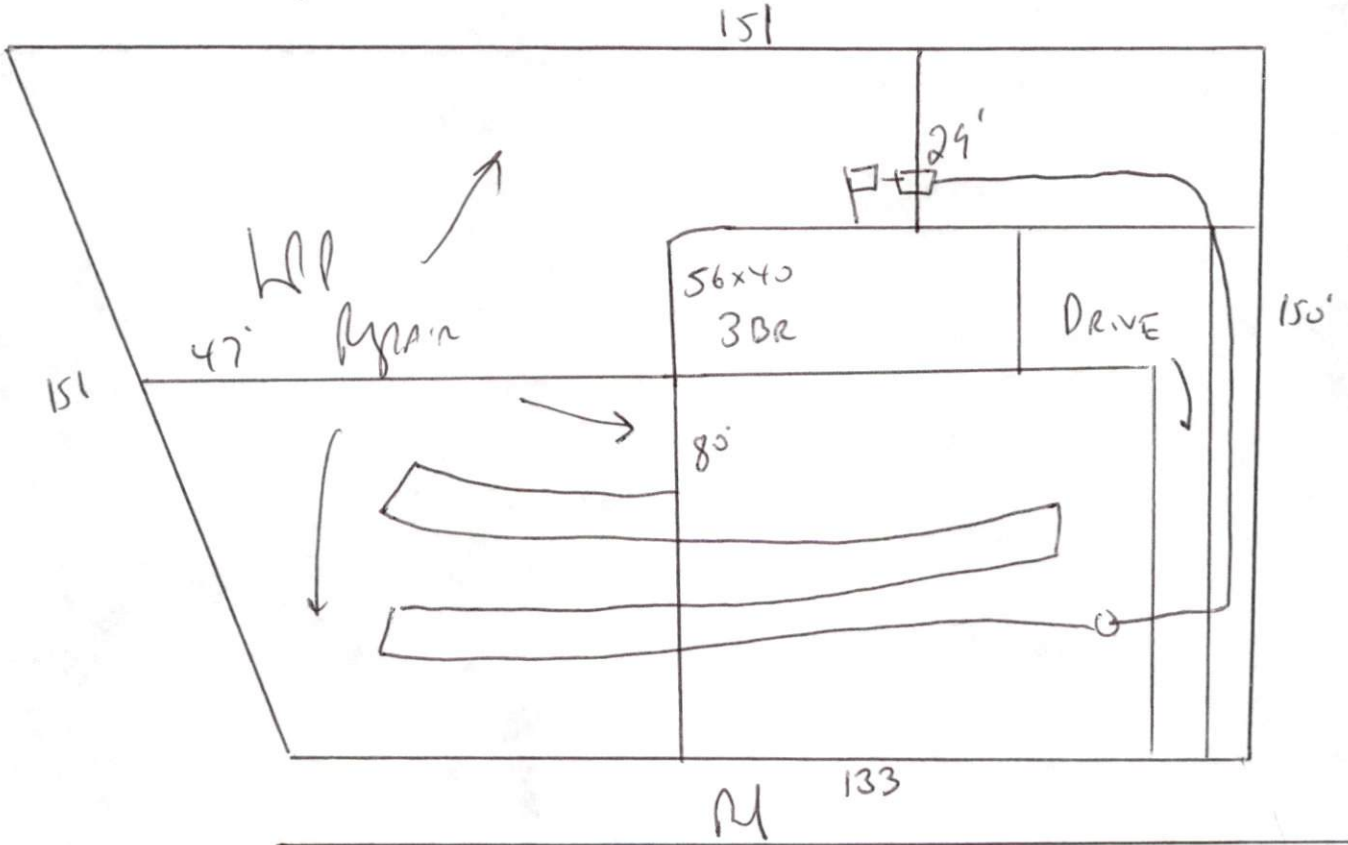

Meet onsite for Final Layout

MAINTAIN ALL SETBACKS

INSTALL 1x300 of 25% Reduction system AT 18"