

HTE# 07-5-17813R

# Harnett County Department of Public Health Improvement Permit

26232

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: REGENCY HOMES INC PROPERTY LOCATION: HOOVER RD  
 NEW  REPAIR  EXPANSION  SUBDIVISION: PERSIMMON HILL LOT # 39  
 Type of Structure: SFD (54'x41') Site Improvements required prior to Construction Authorization Issuance: \_\_\_\_\_  
 Proposed Wastewater System Type: 25% REDUCTION SYSTEM  
 Projected Daily Flow: 360 GPD  
 Number of bedrooms: 3 Number of Occupants: 6 max  
 Basement  Yes  No  
 Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
 Type of Water Supply:  Community  Public  Well Distance from well 100 feet  
 Permit conditions: \_\_\_\_\_ Permit valid for:  Five years  No expiration

Authorized State Agent: [Signature] RENS Date: 8/11/10 SEE ATTACHED SITE SKETCH  
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: REGENCY HOMES INC PROPERTY LOCATION: HOOVER RD  
 Facility Type: SFD (54'x41')  New  Expansion  Repair  
 Basement?  Yes  No Basement Fixtures?  Yes  No  
 Type of Wastewater System\*\* 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 360 GPD  
 (See note below, if applicable )

### Installation Requirements/Conditions

25% REDUCTION SYSTEM (Repair)  
 Number of trenches 3  
 Septic Tank Size 1000 gallons Exact length of each trench 75 feet Trench Spacing: 9 Feet on Center  
 Pump Tank Size \_\_\_\_\_ gallons Trenches shall be installed on contour at a Soil Cover: 6 inches  
 Maximum Trench Depth of: 18 inches (Maximum soil cover shall not exceed 36" above the trench bottom)  
 (Trench bottoms shall be level to +/-1/4" in all directions)  
 Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM  
 Conditions: \_\_\_\_\_ Aggregate Depth: \_\_\_\_\_ inches below pipe \_\_\_\_\_ inches above pipe \_\_\_\_\_ inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.  
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_  
 This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] RENS Date: 8/11/10  
 Construction Authorization Expiration Date: 8/11/15

HTE# 07-5-17813R

Permit # 26232

# Harnett County Department of Public Health Site Sketch

ISSUED TO: REGENCY HOMES INC

PROPERTY LOCATOR: HOOPER RD


SUBDIVISION PERSIMMON HILL

LOT # 39

Authorized State Agent: ~~\_\_\_\_\_~~

RENS (OLIVER TOLKSDORF)

Date: 8/11/10

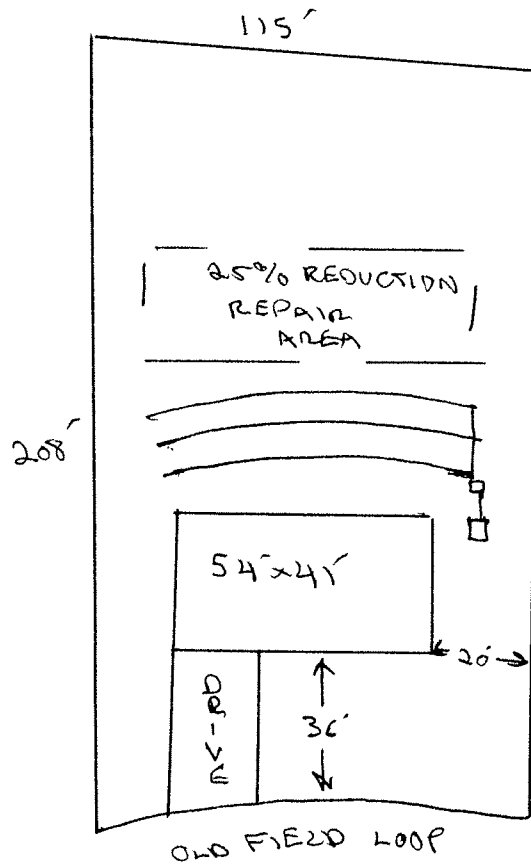

**SOIL/SITE EVALUATION  
 for ON-SITE WASTEWATER SYSTEM**

Owner:                      Applicant:  
 Address:  
 Proposed Facility: 3 Beacon  
 Location of Site:  
 Water Supply:  Public     Individual     Well     Spring     Other  
 Evaluation Method:  Auger Boring     Pit     Cut  
 Type of Wastewater:  Sewage     Industrial Process     Mixed  
 Date Evaluated:  
 Design Flow (.1949): 310 gpd  
 Property Recorded:  
 Property Size:

P R O F I L E #	.1940 Landscape Position/ Slope %	Horizon Depth (In.)	SOIL MORPHOLOGY .1941		OTHER PROFILE FACTORS				Profile Class & LTAR
			.1941 Structure/ Texture	.1941 Consistence Mineralogy	.1942 Soil Wetness/ Color	.1943 Soil Depth (IN.)	.1956 Sapro Class	.1944 Restr Horiz	
1	L5 5-10%	0-20	G LS	WFZ N3/NP					
		20-44	SBK SCL	FR SS/SP					PS 25
2		0-16"	G LS	WFZ N3/NP					
		16-35"	SBK SCL	FR SS/SP	10YR2/2@33"				PS 24

Description	Initial System	Repair System	Other Factors (.1946): Site Classification (.1948): PS Evaluated By: OY Others Present: ES
Available Space (.1945)	✓	✓	
System Type(s)	25% RCD	35% RCD	
Site LTAR	14	4	